
ABSTRACT

This paper gives a detail modelling of six phase Permanent magnet synchronous machine (PMSM) and complete simulation of its drive system and performance analysis in different speed with PI controller. proposed method can be used easily in many applications like ship propulsion, Hybrid electric vehicle, Washing machine, Ship propulsion, Traction, Spinning mills, Aerospace etc. Proportional-Integral controller is mostly used in drives system. The combination of proportional and integral is important to increase the speed of response and also to eliminate the steady state error. Performance analysis with proportional (Kp) and integral (Ki) constant with different speeds and constant torque is studied in the drive system.

KEYWORDS: Multiphase, Permanent magnet synchronous motor (PMSM), PI controller, PWM Inverter .

INTRODUCTION

Multiphase variable speed drive has received growing interest since the second half of the 1990s because of several advantages of multiphase and superiority of PMSM drive system over other drive system. This growing interest is caused by the fact that this machine can provide notable improvements in various aspects of performance as compared to conventional three phase motor and six phase induction Motors. The main application areas of multiphase machines specially motor drives are ship propulsion, traction (including Electric and hybrid electric vehicles) and the concept of More-electric "aircraft. Other suitable applications are Locomotive traction, aerospace and high power Applications.

THREE PHASE DRIVES VS. SIX PHASE DRIVES

Historical technical reasons that required adopting the multiphase drive solution instead of three-phase are listed below [1,2,3,4,5,6]:-

- 1) Multiphase variable speed drive reduces the stator current per phase, for a given motor output power.
- 2) The use of more than three phases offers an improved reliability.
- 3) Multiphase machines present reduced pulsating torques produced by time harmonic components in the excitation waveform.
- 4) Fault tolerant drives
- 5) Higher degree of freedom

SUPERIORITY OF PMSM MOTOR

PMSM have the following advantages over DC Motors:-

Less audible noise, longer life, Spark less (no fire hazard), Higher speed, higher power density and smaller size, Better heat transfer [3,7,8,9,10,11].

PMSM have the following advantages over Induction Motors:-

Higher efficiency, Higher power factor, Higher power density for lower than 10 KW applications, resulting in smaller size Better heat transfer [4-11]

The above comparison shows that the PMSM are superior to the induction motor /DC motor.

MODELLING OF SIX PHASE PMSM

In this study, a six-phase PMSM with two three-phase Windings is adopted where ABC winding is spatially 30 electrical degrees phase led to XYZ winding[12,13].

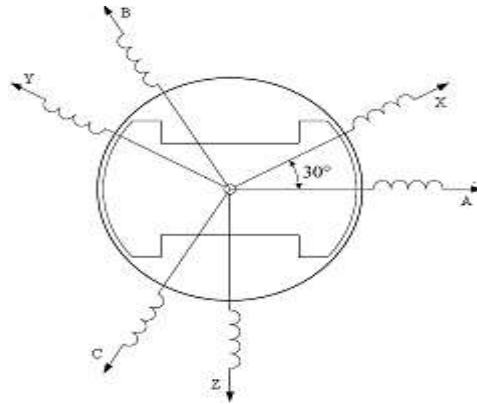


Fig:1 Six- Phase PMSM Motor (Stator winding)

The phase voltage and flux linkage equations in the stationary reference frame for ABC winding and XYZwinding of six-phase PMSM are shown as:

$$V_{ABC} = R_S I_{ABC} + \frac{d\phi_{ABC}}{dt} \quad (1)$$

$$\phi_{ABC} = L_{11} I_{ABC} + L_{12} I_{XYZ} + \phi'_{MABC} \quad (2)$$

$$V_{XYZ} = R_S I_{XYZ} + \frac{d\phi_{XYZ}}{dt} \quad (3)$$

$$\phi_{XYZ} = L_{22} I_{XYZ} + L_{21} I_{ABC} + \phi'_{MXYZ} \quad (4)$$

Where $R_S = \text{diag} [R_S, R_S, R_S]^T$ is the stator resistance vector; $V_{ABC} = [V_A \ V_B \ V_C]^T$ is the phase voltage vector of abc winding; $I_{ABC} = [i_A \ i_B \ i_C]^T$ is the current vector of ABC winding; $V_{XYZ} = [V_X \ V_Y \ V_Z]^T$ is the phase voltage vector of winding; $i_{XYZ} = [i_X \ i_Y \ i_Z]^T$ is the current vector of XYZ winding; $\phi_{ABC} = [\phi_A \ \phi_B \ \phi_C]^T$ is the stator flux linkage vector of win ABC ding; $\phi_{XYZ} = [\phi_X \ \phi_Y \ \phi_Z]^T$ is the stator flux linkage vector of xyz winding; L_{11} is the stator inductance vector of win ABC winding; L_{22} is the stator inductance vector of XYZ winding; L_{11} and L_{22} are the mutual inductance

vectors; ϕ_{MABC} is the permanent-magnet flux linkage vector of ABC winding; ϕ_{MXYZ} is the permanent-magnet flux linkage vector of XYZ winding[14,15,16].

In order to control the six-phase PMSM, the following Transformation matrixes have been used to transfer the above equations into the synchronous rotating reference frame:

$$T_{qd1} = \frac{2}{3} \begin{bmatrix} \cos \theta_e & \cos(\theta_e - 120^\circ) & \cos(\theta_e + 120^\circ) \\ \sin \theta_e & \sin(\theta_e - 120^\circ) & \sin(\theta_e + 120^\circ) \\ \frac{1}{2} & \frac{1}{2} & \frac{1}{2} \end{bmatrix} \quad (5)$$

$$T_{qd2} = \frac{2}{3} \begin{bmatrix} \cos(\theta_e - 30^\circ) & \cos(\theta_e - 150^\circ) & \cos(\theta_e + 90^\circ) \\ \sin(\theta_e - 30^\circ) & \sin(\theta_e - 150^\circ) & \sin(\theta_e + 90^\circ) \\ \frac{1}{2} & \frac{1}{2} & \frac{1}{2} \end{bmatrix} \quad (6)$$

where T_{qd1} is the transformation matrix for ABC winding; T_{qd2} is the transformation matrix for XYZ winding; θ_e is the rotor flux angle[15]. Moreover, the machine model of a six-phase PMSM can be described in synchronous rotating reference frame as follows:

$$v_{q1} = R_s I_{q1} + L_{q11} \frac{dI_{q1}}{dt} + \omega_e (L_{d11} I_{d1} + \phi_{PM}) \quad (7)$$

$$v_{d1} = R_s I_{d1} + L_{d11} \frac{dI_{d1}}{dt} - \omega_e L_{q11} I_{q1} \quad (8)$$

$$v_{q2} = R_s I_{q2} + L_{q22} \frac{dI_{q2}}{dt} + \omega_e (L_{d22} I_{d2} + \phi_{PM}) \quad (9)$$

$$v_{d2} = R_s I_{d2} + L_{d22} \frac{dI_{d2}}{dt} - \omega_e L_{q22} I_{q2} \quad (10)$$

$$\omega_e = \frac{P}{2} \omega_r \quad (11)$$

where v_{d1} and v_{q1} are the d - q axis voltages of ABC winding; v_{d2} and v_{q2} are the d - q axis voltages of XYZ winding; i_{d1} and i_{q1} are the d - q axis currents of ABC winding; i_{d2} and i_{q2} are the d - q axis currents of XYZ winding; L_{d11} and L_{q11} are the d - q axis inductances of ABC winding; L_{d22} and L_{q22} are the d - q axis inductances of XYZ winding; ω_r is the rotor angular velocity; ω_e is the electrical angular velocity; ϕ_{PM} is the permanent magnet flux linkage; p is the no. of pole pairs of six phase PMSM. As assumed that winding sets are identical ($L_{q11} = L_{q22} = L_q$ and $L_{d11} = L_{d22} = L_d$). Furthermore, the developed electric torque T_e can be represented by the following equation:

$$T_e = \frac{3P}{2} [\phi_{PM} (I_{q1} + I_{q2}) + (L_d - L_q) (I_{d1} I_{q1} + I_{d2} I_{q2})] \quad (12)$$

However, the electromagnetic torque cannot be estimated accurately in a general case without knowledge of the currents of both winding sets and the inductance parameters that describe the magnetic coupling between them.

In addition, the mechanical dynamic equation of the six-phase PMSM is:

$$T_e = J \frac{d\omega_r}{dt} + B\omega_r + T_L \quad (13)$$

Where J is the inertia of six-phase PMSM; B is the damping Coefficient; $L T$ is the load torque.[14,15,16].

MACHINE PARAMETER AND MODEL

The Six phase PMSM parameter and model is given in following table and diagram for simulation purpose [14,15,17].

Table

S.No.	Name	Rating
1.	Nominal voltage V_n	380 volts
2.	Nominal speed n_n	350RPM(36.5rad/s)
3.	No.of Poles	8
4.	Stator Resistance R_s	0.64 ohm
5.	PM flux Linkage Φ_{PM}	2.04 wb
6.	L_d, L_q	24mH, 31.4mH
7.	Inertia J	.014Nm/(rad/sec ²)
8.	Damping coefficient B	.0124Nm/(rad/sec)

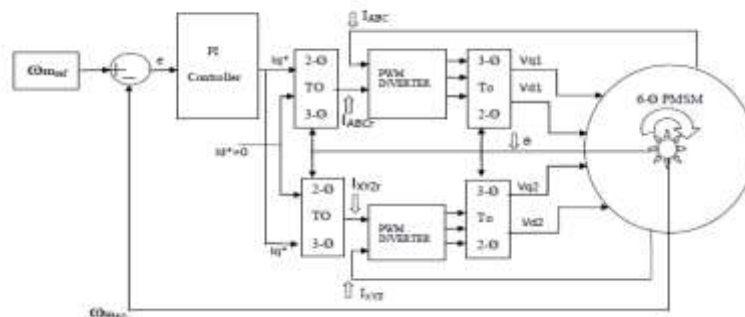



Figure-2 Six-Phase PMSM model

RESULTS AND DISCUSSION


The above model of six phase PMSM drive system has been simulated for 0.2s ,the load Torque is set fix at 50N-M

1. At Reference speed = 36.5 rps:-


In this Case desired speed is set to 36.5 r.p.s. it is found that after 0.125 sec the system reaches its stable state i.e. at the desired value of speed..and the steady state current value is around 9A.

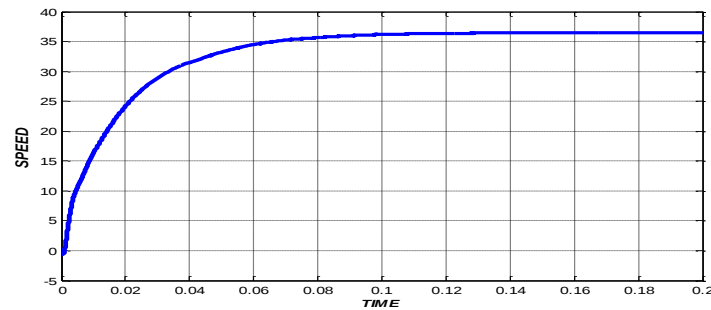

(a)

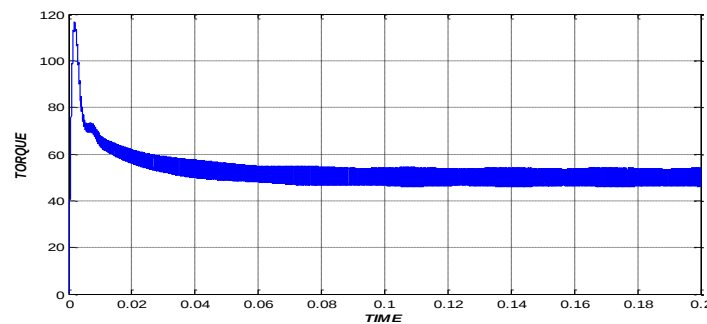

(b)

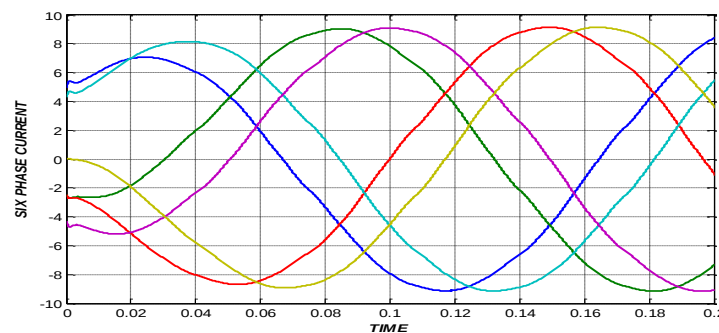


(c)


Fig:3 (a) Speed, (b) Torque,(c) Currents

2. At speed = 30 rps:-


Now in second case desired speed is set to 30 r.p.s. It is found that after 0.11 sec the proposed system reaches its stable state i.e. at the desired value or set value. And this time steady state current value is around 8 A.

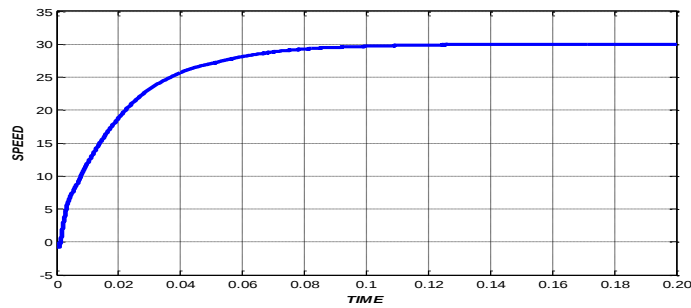

(a)

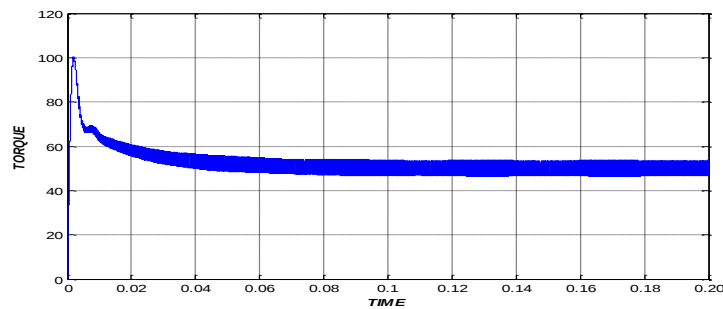

(b)

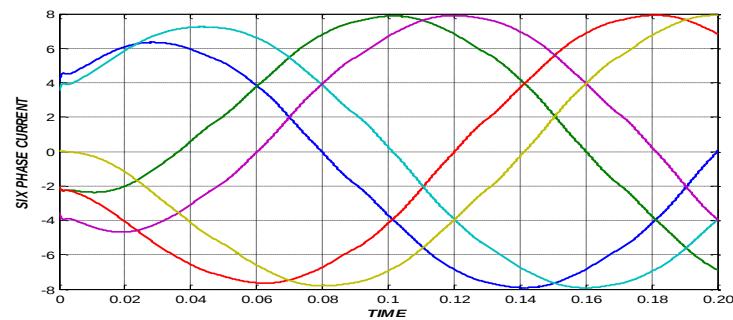


(c)


Fig:4 (a) Speed, (b) Torque,(c) Currents

3. At speed = 20rps:-


Now in third case desired speed is set to 20 r.p.s. It is found that after 0.125 sec. the proposed system reaches its stable state i.e. at the desired value or set value. And this time steady state current value is around 6 A.

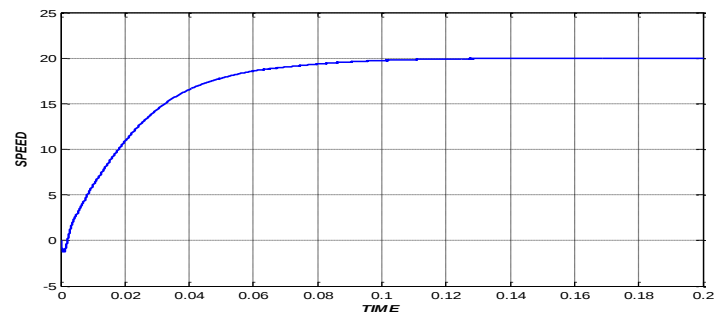

(a)

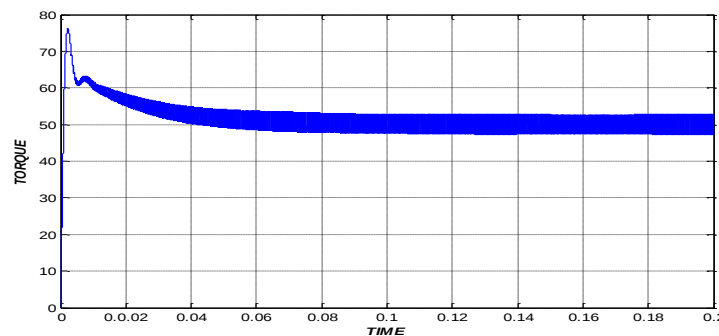

(b)

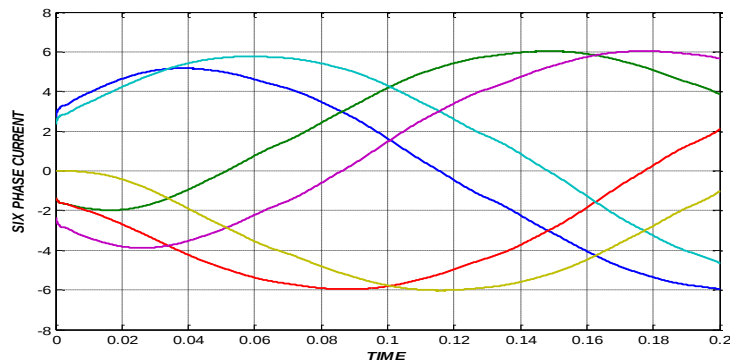

(c)

Fig:5 (a) Speed (b) Torque (c) Currents

CONCLUSION

Mathematical and computer model of multiphase motor with six-phase stator winding and Permanent magnet rotor is presented. Starting transients of torque, speed and current obtained by solving of differential equations of the motor. The simulation results are obtained under various speed conditions and result demonstrate that the proposed model is able to operate at different speed. Overall it can be said that the performance of the proposed scheme is satisfactory.

REFERENCES

1. T.J.E. Miller and M.I. McGilp "Analysis of Multi-Phase Permanent-Magnet Synchronous Machines" SPEED Laboratory, University of Glasgow, UK, 2010
2. Filippo Milanese "Design optimization and control strategies for PM Multiphase Tubular Linear Actuator" *POWER ELECTRONICS, MACHINES AND DRIVES (ING-IND/32)* page 29
3. Jussi Puranen, "Induction motor versus permanent magnet synchronous motor in motion control applications: a comparative study" Lappeenranta University of Technology; Thesis 2006.
4. Ho-Yong Choi, Sun Jung Park, Young Kyung Kong "Design of Multi-phase Permanent Magnet Motor for Ship Propulsion" *IEEE trans.* 2001
5. Leila Parsa Taehyung Kim, "Reducing Torque Pulsation of Multi-Phase Interior Permanent Magnet Machines" *IEEE trans.* 2006, pages 1978-1983
6. Mingzhong Qiao, Xiaofeng Zhang, Xiuming Ren "Research of the Mathematical Model and Sudden Symmetrical Short Circuit of the Multi-phase Permanent-magnet Motor" *IEEE trans.* 2002 pages 769-774
7. P.Pillay and R.Krishanan, "Modeling, simulation, and analysis of permanent-magnet motor drives", part 1: The permanent magnet synchronous motor drive. *IEEE Trans. Ind. Appl.*, vol. 25, No. 2, March-April, 1989.
8. P.Pillay and R.Krishanan, "Application characteristics of permanent-magnet synchronous and brushless DC motor for servo drives", *IEEE Trans. Ind. Appl.*, vol. 27, No. 5, Sep-Oct, 1991
9. Marc Vila mani A quick overview on rotatory Brush and Brushless DC Motors Motion Control Department C./Llacuna 162, Barcelona – Spain, 2005.
10. Xiao Xi, Li Yongdong, Li Min, "Performance control of PMSM using a self-tuning PID", *IEEE Conf.*, 2005, pages 1053-1057.
11. **Urs Kafader**, "Selecting Dc Brush and Brushless Motors" **Maxon Precision Motor, Machinedesign.com.**
12. T.A.Lipo, "A d-q model for six phase induction motor" 1980.
13. Yifan zhao, T.A.Lipo "space vector PWM control of Dual three phase induction machine using vector space decomposition" *IEEE Trans. vol.31 no.5*, 1995.
14. J. Karttunen, S. Kallio, P. Peltoniemi, P. Silventoinen, and O. Pyrhonen "Dual Three-Phase Permanent Magnet Synchronous Machine Supplied by Two Independent Voltage Source Inverters" *IEEE trans.* 2012 pages 741-747
15. Anurag Singh Tomer, S.P.Dubey "Performance Comparison of Six phase PMSM Drive system by Using Conventional PI and Fuzzy Logic controller" *IJAER*, Vol. 10, Number 18 (2015) pp 39541-39546.
16. Leila Parsa Hamid A. Toliyat "Multi-Phase Permanent Magnet Motor Drives" *IEEE trans* 2003 pages 401-408, 2003
17. Anurag Singh Tomer, S.P.Dubey "Performance Analysis of Six Phase PMSM Drive Fed By Two Inverter" 4th IEEE international conference, Nirma University Ahmedabad, 28-30 Oct 2013.

AUTHOR BIBLIOGRAPHY

	Er. Anurag Singh Tomer is presently working as scientist (Electrical Engineering) at Indira Gandhi Krishi Vishwavidyalaya, Raipur (C.G.). He is M.Tech in Electrical Engineering. His area of research are Artificial Intelligence, Drive control, Modeling/Simulation, Multiphase Machines. He is having an experience of around fifteen years in the field of teaching and research.
	Dr. Satya Prakash Dubey is Presently working as Dean Research and Development at RCET, Bhilai (C.G.). He is Ph.D. in Electrical. He has many research projects under his belt. His area of research are filters, power electronics, Drives, Artificial intelligent, Multiphase machine analysis, Control System etc.