



## Recent results with radiation-tolerant TowerJazz 180 nm MALTA sensors

Matt LeBlanc<sup>a,\*</sup>, Phil Allport<sup>b</sup>, Igancio Asensi<sup>a</sup>, Dumitru-Vlad Berlea<sup>c</sup>, Daniela Bortoletto<sup>d</sup>, Craig Buttar<sup>e</sup>, Florian Dachs<sup>a</sup>, Valerio Dao<sup>a</sup>, Haluk Denizli<sup>f</sup>, Dominik Dobrijevic<sup>a,g</sup>, Leyre Flores<sup>a</sup>, Andrea Gabrielli<sup>a</sup>, Laura Gonella<sup>b</sup>, Vicente González<sup>h</sup>, Giuliano Gustavino<sup>a</sup>, Kaan Oyulmaz<sup>f</sup>, Heinz Pernegger<sup>a</sup>, Francesco Piro<sup>a,i</sup>, Petra Riedler<sup>a</sup>, Heidi Sandaker<sup>j</sup>, Carlos Solans<sup>a</sup>, Walter Snoeys<sup>a</sup>, Tomislav Suligoj<sup>g</sup>, Milou van Rijnbach<sup>a,j</sup>, Abhishek Sharma<sup>a</sup>, Marcos Vázquez Núñez<sup>a,h</sup>, Julian Weick<sup>a,k</sup>, Steven Worm<sup>c</sup>, Abdelhak Zoubir<sup>k</sup>

<sup>a</sup> Experimental Physics Department, Organisation Européenne pour la Recherche Nucléaire (CERN), CH-1211 Genève 23, Geneva, Switzerland

<sup>b</sup> University of Birmingham, United Kingdom

<sup>c</sup> Deutsches Elektronen-Synchrotron (DESY), Platanenallee 6, D-15738 Zeuthen, Germany

<sup>d</sup> University of Oxford, United Kingdom

<sup>e</sup> University of Glasgow, United Kingdom

<sup>f</sup> Bolu Abant İzzet Baysal University, Turkey

<sup>g</sup> University of Zagreb, Croatia

<sup>h</sup> University of Valencia, Spain

<sup>i</sup> École polytechnique fédérale de Lausanne, Lausanne, Switzerland

<sup>j</sup> University of Oslo, Norway

<sup>k</sup> Technische Universität Darmstadt, Germany

## ARTICLE INFO

## Keywords:

CMOS

DMAPS

Monolithic sensors

## ABSTRACT

To achieve the physics goals of future colliders, it is necessary to develop novel, radiation-hard silicon sensors for their tracking detectors. We target the replacement of hybrid pixel detectors with Depleted Monolithic Active Pixel Sensors (DMAPS) that are radiation-hard, monolithic CMOS sensors. We have designed, manufactured and tested the MALTA series of sensors, which are DMAPS in the 180 nm TowerJazz CMOS imaging technology. MALTA have a pixel pitch well below current hybrid pixel detectors, high time resolution ( $< 2$  ns) and excellent charge collection efficiency across pixel geometries. These sensors have a total silicon thickness of between 50–300  $\mu\text{m}$ , implying reduced material budgets and multiple scattering rates for future detectors which utilise such technology. Furthermore, their monolithic design bypasses the costly stage of bump-bonding in hybrid sensors and can substantially reduce detector costs. This contribution presents the latest results from characterisation studies of the MALTA2 sensors, including results demonstrating the radiation tolerance of these sensors.

## 1. Introduction

Future high-energy physics experiments target measurements of the Standard Model with an unprecedented level of precision. One key benchmark will be the measurement of major Higgs boson branching fractions to percent-level precision, which implies performant  $b$ - vs.  $c$ -hadron identification and large datasets [1,2]. To achieve such performance future tracking detectors must be designed with low material budgets and fast readouts. They will contain large surface areas of active sensors, and will be exposed to high radiation doses. These constraints motivate development of novel, radiation-hard silicon sensors that can affordably solve such problems.

Monolithic sensors, fabricated in commercial foundry processes, are a technology that offers potential solutions to several of these challenges [3]. Such sensors integrate the readout electronics and sensor into the same silicon wafer, eliminating the costly bump-bonding step of state-of-the-art hybrid pixel detectors currently used in high-energy physics experiments. The sensor capacitance for CMOS sensors can be made small ( $< 5$  fF), offering a higher voltage signal despite reduced thickness of the sensor. This implies decreased power consumption requirements ( $< 1$   $\mu\text{W}/\text{pixel}$ ), which could permit a significant reduction of powering and cooling services for future detectors. Reduced material budgets result in less multiple scattering of charged particles, improving impact parameter and momentum resolution as well as increasing the overall tracking efficiency of the charged particles produced in collider events.

\* Corresponding author at: University of Birmingham, United Kingdom.

E-mail address: [matt.leblanc@cern.ch](mailto:matt.leblanc@cern.ch) (M. LeBlanc).

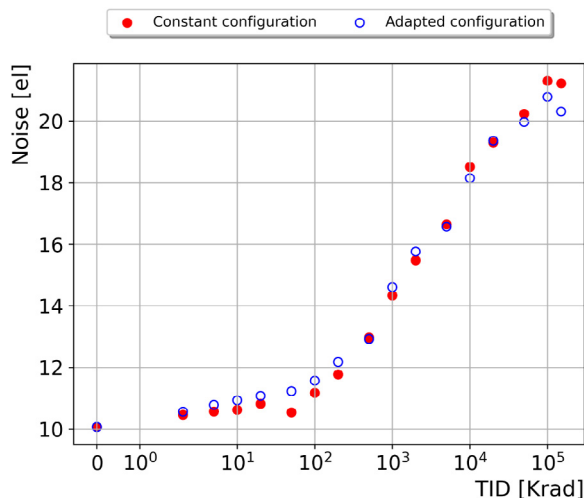


Fig. 1. Equivalent noise charge vs. total ionising dose for a MALTA2 sensor with high doping concentration in the  $n$ -blanket. The sensor was irradiated in steps up to 1 MRad, with (closed markers) no adjustments made to settings and (open markers) the threshold adjusted between each step to maintain a constant threshold of  $500 e^-$ .

The MALTA series of depleted monolithic active-pixel sensors (DMAPS) [4–6] was designed for potential applications in the ATLAS experiment [7] at the high-luminosity LHC (HL-LHC) [8]. They are manufactured in the TowerJazz 180 nm CMOS imaging process, with additional process modifications [9,10] that enhance the lateral electric field into pixel corners to increase tolerance to non-ionising energy loss (NIEL). MALTA2 is the latest full-scale prototype in this series, measuring  $10.12 \times 20.2$  mm with a pixel pitch of  $36.4 \mu\text{m}$ . This sensor features a fast asynchronous readout capable of operating at 5 Gbps [11], sufficient for environments with hit rates on the order of  $100 \text{ MHz}/\text{cm}^2$ . MALTA2 improves on the original MALTA sensor by cascoding the M3 transistor and enlarging the M4 transistor and CS capacitor [12]. These changes result in reduced noise tails compared to the original MALTA when operating at the same threshold and bias.

## 2. Front-end characteristics & irradiation

A series of studies from Ref. [12] were presented, which characterise the MALTA2 front-end electronics and demonstrate its radiation tolerance up to  $3 \cdot 10^{15} \text{ 1 MeV } n_{\text{eq}}/\text{cm}^2$  and 100 MRad. The MALTA2 equivalent noise charge (ENC) is observed to increase monotonically vs. TID when the front-end settings are adjusted to maintain a constant threshold of  $100e^-$ . A similar study of front-end irradiation to that of Ref. [12] was performed at a higher threshold ( $500e^-$ ) using a sensor with higher doping concentration in the  $n$ -type blanket implant, which produced a consistent picture of ENC development (Fig. 1).

The time-walk of the front-end was measured to be less than 25 ns for 90% of signals from a  $^{90}\text{Sr}$  source. Charged particles produced by this source create MIP-like signals with an average charge deposition of roughly  $1800e^-$ , while signals with time-walk larger than 25 ns were observed for signals with charge depositions below  $200e^-$ . Such signals are likely produced by charge-sharing in pixel clusters.

The time jitter of the front-end electronics was studied by injecting charge within a pixel using circuitry within the matrix digital readout. The arrival time of hits from the injected charge is compared to the timing of the charge injection trigger pulse transmitted to the chip, using a 3 ps binning TDC [13]. The time jitter of the MALTA2 front-end electronics was measured to be 0.17 ns for injected charges above  $1400 e^-$ , increasing to 4.7 ns at the nominal  $100e^-$  threshold.

## 3. Timing studies

A campaign of test-beam measurements was performed with the 180 GeV proton beamline at the CERN Super Proton Synchrotron (SPS) during 2021, with the goal of characterising MALTA2 sensors in terms of their radiation tolerance and timing performance. A custom pixel telescope composed of six MALTA tracking & triggering layers was used to study up to two MALTA2 devices under test (DUTs) at a time, hosted in a cold box. A scintillator located behind the telescope planes provides a timing reference for triggered signals.

Preliminary initial results from this campaign were presented, demonstrating the timing performance of two unirradiated MALTA2 sensors: one is a MALTA2 produced on a high-resistivity epitaxial layer, while the other is produced on a novel, thick, high-resistivity ( $3\text{--}4 \text{ k}\Omega$ )  $p$ -type Czochralski (Cz) substrate, respectively referred to as the ‘epi.’ and ‘Cz’ sensors in the following discussion. Both sensors have extra-deep  $p$ -well implants and are  $100 \mu\text{m}$  thick. The epi. sensor has a low doping concentration of its  $n$ -type blanket, while the Cz sensor has a high doping concentration. Both sensors are operated at  $-6 \text{ V}$  substrate and  $p$ -well bias. The threshold of the Cz sensor was measured to be to  $170 e^-$ , while the threshold of the epi. sensor was measured to be  $130e^-$ .

The arrival time of the fastest hit in a pixel cluster was observed to increase slightly as a function of the distance of the hit in the pixel matrix from the front-end electronics. The arrival time delay also depends weakly on the front-end biasing group (columns 32 pixels wide) in the matrix where the hit is made. Correcting for these effects during offline reconstruction of the test-beam data results in an RMS time-of-arrival equal to 1.9 ns for the epi. MALTA2, and 1.8 ns for the Cz sensor. The in-time efficiency for both sensors was determined by integrating the time-of-arrival distributions with a sliding window algorithm, and is shown in Fig. 2. It was found to be above 98% (90%) for a 25 ns (8 ns) time window, suitable for applications at the HL-LHC and other proposed future collider facilities.

Fig. 3 shows, for the same two sensors, the difference between the arrival time of the leading hit in a pixel cluster and the average arrival time of signals from the entire pixel matrix. This information is projected over a  $2 \times 2$  pixel matrix, allowing charge-sharing effects to be studied. Signals with late arrival times are observed to originate from the corners of pixels: in such cases, charge-sharing results in a lower charge deposition per-pixel, and increased time-walk effects. More detailed simulations of charge-sharing effects in MALTA2 are being pursued.

## 4. Multi-chip modules

The production of multi-chip modules is ongoing for both MALTA and MALTA2 sensors. The functionality of dual-chip and quad-chip MALTA carrier boards was recently demonstrated in a lab-bench ‘mini-telescope’ for cosmic ray data-taking (Fig. 4), where the multi-chip modules have been shown to significantly increase the acceptance of the apparatus. A four-chip flex PCB for MALTA2 sensors is being planned.

## 5. Conclusion

MALTA2 is the latest full-scale prototype monolithic sensor in the MALTA family, designed for use in experimental conditions similar to those of the HL-LHC. The front-end electronics of this sensor have been shown to be fully functional following irradiation up to  $3 \cdot 10^{15} \text{ 1 MeV } n_{\text{eq}}/\text{cm}^2$  and 100 MRad [12].

Initial studies of the MALTA2 timing performance have been performed. The time-walk of the front-end electronics was measured to be less than 25 ns for 90% of signals from a  $^{90}\text{Sr}$  source, and the time jitter of the front-end electronics was found to be 0.16 ns for large input charges, increasing to 4.7 ns at the nominal 100-electron threshold. The

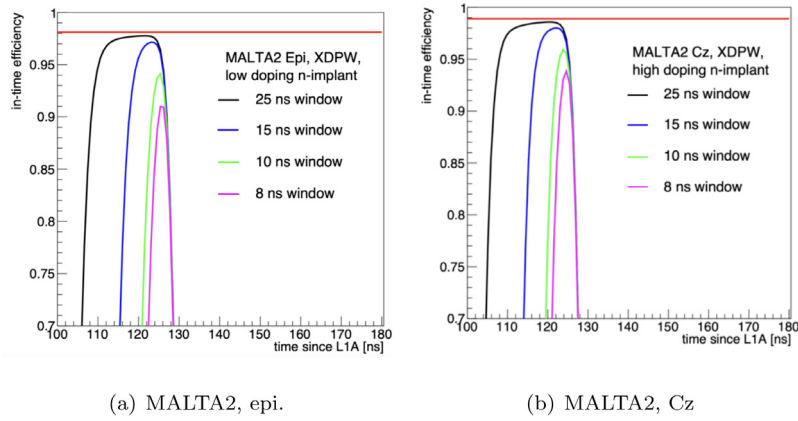


Fig. 2. In-time efficiency for MALTA2 sensors produced on (a) a high-resistivity epitaxial layer and (b) a novel, thick high-resistivity *p*-type Czochralski substrate. Both sensors are 100  $\mu\text{m}$  thick and fabricated in the modified 180 nm TowerJazz process with extra-deep *p*-wells, with high doping of *n*-type blanket. Both sensors are operated at  $-6$  V bias for both the substrate and *p*-well. The absolute value of the *x*-axis contains an arbitrary delay related to the signal processing pipeline, resulting in signals arriving after  $\sim 130$  ns. Measurements were performed with a 180 GeV proton beam at the CERN SPS during 2021.

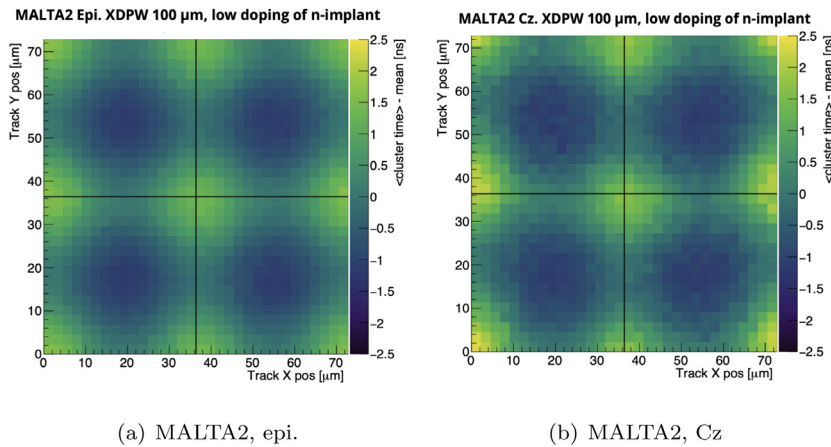


Fig. 3. In-pixel timing projected over a  $2 \times 2$  pixel matrix for MALTA2 sensors produced on (a) a high-resistivity epitaxial layer and (b) a novel, thick high-resistivity *p*-type Czochralski substrate. Both sensors are 100  $\mu\text{m}$  thick and fabricated in the modified 180 nm TowerJazz process with extra-deep *p*-wells, with high doping of *n*-type blanket. Both sensors are operated at  $-6$  V bias for both the substrate and *p*-well. Measurements were performed with a 180 GeV proton beam at the CERN SPS during 2021.

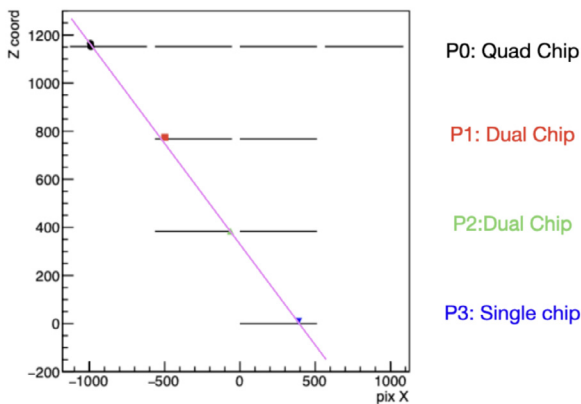


Fig. 4. Event display of a cosmic-ray muon reconstructed using a lab-bench ‘mini-telescope’ consisting of a quad-chip MALTA plane, a pair of dual-chip MALTA planes and a single-chip plane.

pixel in-time efficiency was measured using a 180 GeV proton beam at the CERN SPS in summer 2021, and was found to be over 98% (90%) for a time window of 25 ns (8 ns) for MALTA2 sensors with high-resistivity epitaxial layers or novel, thick *p*-type Czochralski substrates manufactured with extra-deep *p*-well implants.

Initial results using multi-chip MALTA modules were presented, including quad- and dual-MALTA carrier boards and plans for a four-chip MALTA2 flex PCB.

#### Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

#### Acknowledgments

This project has received funding from the European Union’s Horizon 2020 Research and Innovation programme under Grant Agreement numbers 101004761 (AIDainnova), 675587 (STREAM), and 654168 (IJS, Ljubljana, Slovenia).

#### References

- [1] P. Bambade, et al., The international linear collider: A global project, 2019, [arXiv:1903.01629](https://arxiv.org/abs/1903.01629).
- [2] M. Bai, et al., C<sup>3</sup>: A ‘Cool’ route to the Higgs Boson and beyond, 2021, [arXiv:2110.15800](https://arxiv.org/abs/2110.15800).

- [3] M. Aleksa, J. Blomer, B. Cure, M. Campbell, C. D'Ambrosio, D. Dannheim, M. Doser, F. Faccio, P. Farthouat, C. Gargiulo, P. Janot, C. Joram, M. Krammer, L. Linssen, P. Mato Vila, P. Rodrigues Simoes Moreira, L. Musa, E. Oliveri, A. Onnala, H. Pernegger, P. Riedler, C. Rembser, G. Stewart, H. Ten Kate, F. Vasey, Strategic R&D Programme on Technologies for Future Experiments, Tech. Rep., CERN, Geneva, 2018, URL <https://cds.cern.ch/record/2649646>.
- [4] H. Pernegger, R. Bates, C. Buttar, M. Dalla, J.W.v. Hoorne, T. Kugathasan, D. Maneuski, L. Musa, P. Riedler, C. Riegel, C. Sbarra, D. Schaefer, E.J. Schioppa, W. Snoeys, First tests of a novel radiation hard CMOS sensor process for depleted monolithic active pixel sensors, JINST 12 (2017) 23, <http://dx.doi.org/10.1088/1748-0221/12/06/P06008>, P06008, URL <https://cds.cern.ch/record/2274477>.
- [5] H. Pernegger, P. Allport, I. Asensi Tortajada, M. Barbero, P. Barrillon, I. Berdalovic, C. Bepin, S. Bhat, D. Bortoletto, P. Breugnon, C. Buttar, R. Cardella, F. Dachs, V. Dao, Y. Degerli, H. Denizli, M. Dyndal, L. Flores Sanz de Acedo, P. Freeman, L. Gonella, A. Habib, T. Hemperek, T. Hirono, B. Hiti, T. Kugathasan, I. Mandić, M. Mikuž, K. Moustakas, M. Munker, K. Oyulmaz, P. Pangaud, F. Piro, P. Riedler, H. Sandaker, E. Schioppa, P. Schwemling, A. Sharma, L. Simon Argemi, C. Solans Sanchez, W. Snoeys, T. Suligoj, T. Wang, N. Vermes, Radiation hard monolithic CMOS sensors with small electrodes for high luminosity LHC, Nucl. Instrum. Methods Phys. Res. A 986 (2021) 164381, <http://dx.doi.org/10.1016/j.nima.2020.164381>.
- [6] M. Dyndal, V. Dao, P. Allport, I.A. Tortajada, M. Barbero, S. Bhat, D. Bortoletto, I. Berdalovic, C. Bepin, C. Buttar, I. Caicedo, R. Cardella, F. Dachs, Y. Degerli, H. Denizli, L.F.S. de Acedo, P. Freeman, L. Gonella, A. Habib, T. Hemperek, T. Hirono, B. Hiti, T. Kugathasan, I. Mandić, D. Maneuski, M. Mikuž, K. Moustakas, M. Munker, K. Oyulmaz, P. Pangaud, H. Pernegger, F. Piro, P. Riedler, H. Sandaker, E. Schioppa, P. Schwemling, A. Sharma, L.S. Argemi, C.S. Sanchez, W. Snoeys, T. Suligoj, T. Wang, N. Vermes, S. Worm, Mini-MALTA: radiation hard pixel designs for small-electrode monolithic CMOS sensors for the high luminosity LHC, J. Instrum. 15 (02) (2020) P02005, <http://dx.doi.org/10.1088/1748-0221/15/02/p02005>.
- [7] ATLAS Collaboration, The ATLAS experiment at the CERN large hadron collider, JINST 3 (2008) S08003, <http://dx.doi.org/10.1088/1748-0221/3/08/S08003>.
- [8] I. Béjar Alonso, O. Brüning, P. Fessia, L. Rossi, L. Taviani, M. Zerlauth (Eds.), High-Luminosity Large Hadron Collider (HL-LHC): Technical Design Report, Vol. 10/2020, 2020, <http://dx.doi.org/10.23731/CYRM-2020-0010>.
- [9] W. Snoeys, et al., A process modification for CMOS monolithic active pixel sensors for enhanced depletion, timing performance and radiation tolerance, Nucl. Instrum. Methods A 871 (2017) 90–96, <http://dx.doi.org/10.1016/j.nima.2017.07.046>.
- [10] M. Munker, M. Benoit, D. Dannheim, A. Fenigstein, T. Kugathasan, T. Leitner, H. Pernegger, P. Riedler, W. Snoeys, Simulations of CMOS pixel sensors with a small collection electrode, improved for a faster charge collection and increased radiation tolerance, J. Instrum. 14 (05) (2019) C05013, <http://dx.doi.org/10.1088/1748-0221/14/05/c05013>.
- [11] R. Cardella, I. Asensi Tortajada, I. Berdalovic, C. Bepin, F. Dachs, V. Dao, L. Flores Sanz de Acedo, F. Piro, T. Hemperek, T. Hirono, B. Hiti, T. Kugathasan, C.A.M. Tobon, K. Moustakas, H. Pernegger, P. Riedler, E.J. Schioppa, A. Sharma, L.S. Argemi, W. Snoeys, C. Solans Sanchez, T. Wang, N. Vermes, MALTA: An asynchronous readout CMOS monolithic pixel detector for the ATLAS high-luminosity upgrade, JINST 14 (2019) 8, <http://dx.doi.org/10.1088/1748-0221/14/06/C06019>, C06019, URL <https://cds.cern.ch/record/2691881>.
- [12] F. Piro, P. Allport, I. Asensi, I. Berdalovic, D. Bortoletto, C. Buttar, R. Cardella, E. Charbon, F. Dachs, V. Dao, D. Dobrijevic, M. Dyndal, L. Flores, P. Freeman, A. Gabrielli, L. Gonella, T. Kugathasan, M. LeBlanc, K. Oyulmaz, H. Pernegger, P. Riedler, M. van Rijnbach, H. Sandaker, A. Sharma, C. Solans, W. Snoeys, T. Suligoj, J. Torres, S. Worm, A 1  $\mu$ W radiation-hard front-end in a 0.18  $\mu$ m CMOS process for the MALTA2 monolithic sensor, IEEE Trans. Nucl. Sci. 69 (6) (2022) 1299–1309, <http://dx.doi.org/10.1109/TNS.2022.3170729>.
- [13] L. Perktold, J. Christiansen, A multichannel time-to-digital converter ASIC with better than 3 ps RMS time resolution, J. Instrum. 9 (2013) <http://dx.doi.org/10.1088/1748-0221/9/01/C01060>.