

# Reference Manual Kratos GeoMechanics

Aron Noordam

Version: use `\version{...}`  
SVN Revision: 00

April 27, 2020

## **Reference Manual Kratos GeoMechanics,**

### **Published and printed by:**

Deltares  
Boussinesqweg 1  
2629 HV Delft  
P.O. 177  
2600 MH Delft  
The Netherlands

telephone: +31 88 335 82 73  
fax: +31 88 335 85 82  
e-mail: [info@deltares.nl](mailto:info@deltares.nl)  
www: <https://www.deltares.nl>

### **For sales contact:**

telephone: +31 88 335 81 88  
fax: +31 88 335 81 11  
e-mail: [software@deltares.nl](mailto:software@deltares.nl)  
www: <https://www.deltares.nl/software>

### **For support contact:**

telephone: +31 88 335 81 00  
fax: +31 88 335 81 11  
e-mail: [software.support@deltares.nl](mailto:software.support@deltares.nl)  
www: <https://www.deltares.nl/software>

Copyright © 2020 Deltares

All rights reserved. No part of this document may be reproduced in any form by print, photo print, photo copy, microfilm or any other means, without written permission from the publisher: Deltares.

## Contents

|  |           |
|--|-----------|
| <b>List of Figures</b>                             | <b>iv</b> |
| <b>List of Tables</b>                              | <b>v</b>  |
| <b>1 Introduction</b>                              | <b>1</b>  |
| <b>2 Getting started</b>                           | <b>2</b>  |
| <b>3 Create geometry</b>                           | <b>4</b>  |
| 3.0.1 Create lines . . . . .                       | 4         |
| 3.0.2 Create surfaces . . . . .                    | 4         |
| 3.0.3 Create volumes . . . . .                     | 5         |
| <b>4 Define problem</b>                            | <b>6</b>  |
| 4.0.1 Materials . . . . .                          | 6         |
| 4.0.2 Boundary conditions . . . . .                | 6         |
| 4.0.3 Structural elements and interfaces . . . . . | 6         |
| <b>5 Meshing</b>                                   | <b>7</b>  |
| <b>6 Calculating</b>                               | <b>8</b>  |
| <b>7 PostProcess</b>                               | <b>9</b>  |
| <b>8 Tutorial 1: Dike</b>                          | <b>10</b> |
| 8.1 Geometry . . . . .                             | 10        |
| 8.2 Boundary conditions . . . . .                  | 11        |
| 8.3 Materials . . . . .                            | 11        |
| 8.4 Water . . . . .                                | 13        |
| 8.5 Loads . . . . .                                | 14        |
| 8.6 Meshing . . . . .                              | 15        |
| 8.7 Project Parameters . . . . .                   | 16        |
| 8.8 Calculate . . . . .                            | 16        |
| 8.9 Post-process part 1 . . . . .                  | 17        |
| 8.10 Staged construction . . . . .                 | 17        |
| 8.11 Calculate staged construction . . . . .       | 19        |
| 8.12 Post-process part 2 . . . . .                 | 19        |

## List of Figures

|      |   |    |
|------|---|----|
| 8.1  | All outlines tutorial 1 . . . . .   | 11 |
| 8.2  | Geometry tutorial 1 . . . . .   | 11 |
| 8.3  | Dirichlet constraints window . . . . .  | 12 |
| 8.4  | Clay parameters tutorial 1 . . . . .  | 12 |
| 8.5  | Sand parameters tutorial 1 . . . . .  | 13 |
| 8.6  | Dike parameters tutorial 1 . . . . .  | 14 |
| 8.7  | River water level tutorial 1 . . . . .  | 15 |
| 8.8  | River load tutorial 1 . . . . .   | 16 |
| 8.9  | Dike water level tutorial 1 . . . . .   | 17 |
| 8.10 | Contour results tutorial 1 part 1, top to bottom: water pressure, x-displacement,<br>y-displacement . . . . . | 18 |

List of Tables

8.1 Outline geometry tutorial 1 . . . . . 10

8.2 Outline soil layer tutorial 1 . . . . . 10

8.3 Verticals turning points phreatic line tutorial 1 . . . . . 10


8.4 Surfaces tutorial 1 . . . . . 11




# 1 Introduction

## 2 Getting started

Below is a figure which shows the main window of the GID - pre processor and its different parts. Within the manual, references will be made to these different parts.

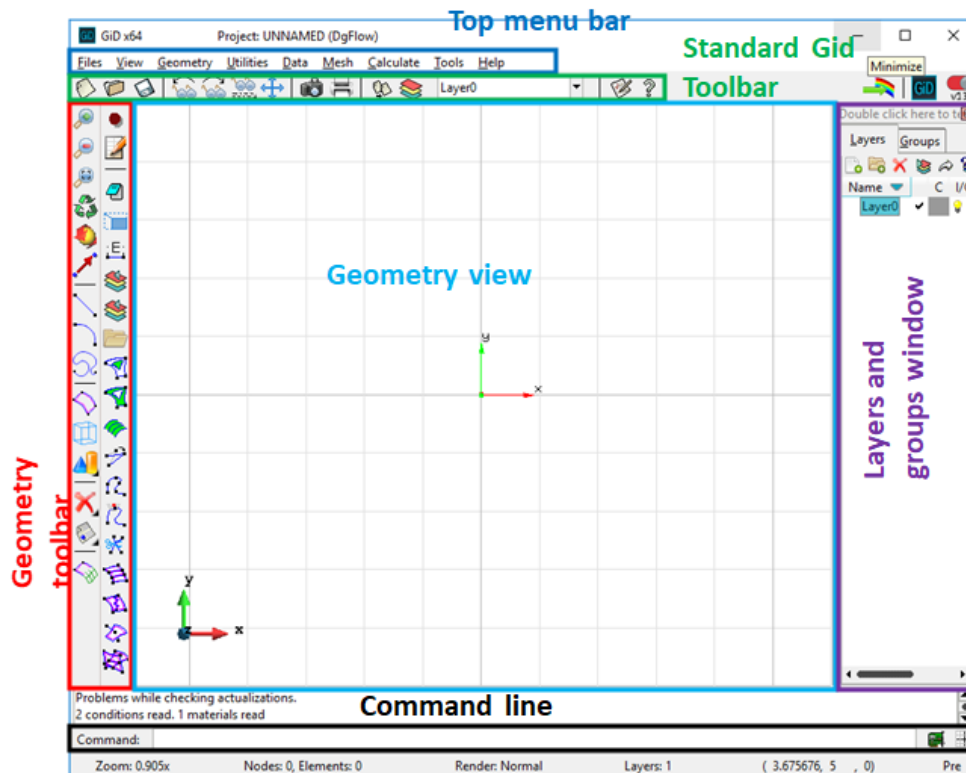

- 1 Download KratosGeoMechanics from the buildserver (Deltares only) [Download Kratos-GeoMechanics](#). As work is still in progress, not all tests succeed on the build-server. However, when a compilation error did not occur, KratosGeomechanics can still be used. Click on the  icon of the latest build without a compiling error and download KratosGeoMechanics.zip.
- 2 unzip **KratosGeoMechanics.zip** and place it in a convenient location.
- 3 Go to [Download python 3.7](#) and download "Windows x86-64 embeddable zip file".
- 4 unzip the python zip file. From the unzipped directory, copy: "**python37.dll**". And paste it in the "*KratosGeoMechanics*" directory.
- 5 Download GID from [Download GID](#). The problemtype is made while using GID version 14\*.
- 6 In the KratosGeoMechanics directory go to:  
"applications/GeoMechanicsApplication/custom\_problemtype/  
GeoMechanicsApplication.gid"
- 7 right click and edit "**GeoMechanicsApplciation.win.bat**". Replace all the paths until "*\*\\Kratos*" with the location of the KratosGeoMechanics dir on your local drive. For example : replace "*D:\\src\\Kratos\\runkratos*" by "*C:\\Users\\noordam\\Downloads\\KratosGeoMechanics\\runkratos*". Note that the double backslashes are required for path separations.

- 8 Copy the **GeoMechanicsApplication.Gid** problemtype paste it in the GiD problemtypes folder, e.g. : *C:/Program Files/GiD/GiD 14.0.3/problemtypes/*
  - ◇ *When performing this step, GiD files can easily be transferred between different PC's, however admin rights on your computer are required for this step.*
  - ◇ *If you do not have admin rights, it is still possible to use GiD and to transfer GiD files between different PC's, however, more effort is required to retain all data. Explanation is given in section @@@.*
- 9 Open GiD (it is recommended to have your GiD window on your main screen, since GiD pop-up messages appear on your main screen)
- 10 If you performed Step 2, perform Step 4.1, else perform Step 4.2.
  - 10.1 In the top menu bar choose: Data -> Problem type-> GeoMechanicsApplication
  - 10.2 In the top menu bar choose: Data -> Problem type-> Load... and choose file: *GeoMechanicsApplication.gid* from any locations
- 11 In the top menu bar choose: Utilities -> Preferences.
- 12 In the Preferences window choose: Grid
  - ◇ Alter the domain size to your liking (X Extents / Y Extends)
  - ◇ In General options: activate the options as preferred.
  - ◇ In Spacing: alter the spacing for which your pointer snaps to a location.

## 3 Create geometry

### 3.0.1 Create lines

1 In the geometry toolbar click on either:



◇ Create line



◇ Create arc



◇ Create nurbs line

2 Create the line by clicking on the domain or fill in the coordinates in the command line below. When the line is finished, press ESC.



3 In order to change the location of the line, press the “move a point” button on the left toolbar. In the domain click on a point of the line to select it. Click somewhere else in the domain or fill in the new coordinates to move the point to that location.

4 Lines always have to be connected to other lines by points. In order to add extra points on an existing line, there are the following options



◇ Divide a line in a number of divisions



◇ Divide a line near a point



◇ Divide a line on intersecting lines

### 3.0.2 Create surfaces

1 To create a surface there are 2 options:



◇ click on create object and choose either: **Rectangle**, **Polygon** or **Circle**. And draw the surface in the geometry view, or fill in the coordinates in the command line.

◇ Create lines as described before. Connect the lines until a closed shape is formed.





Click on "Create NURBS surface"



and select the lines in the geometry view which should form the boundary of your surface. Press ESC to finish.



*(Note that lines have to be connected through points, when one line finishes halfway on another line, this is not considered as a closed surface. Another point has to be added to the second line to form a closed surface.)*

2 In order to divide a surface into multiple surfaces click on either of the following buttons on the Geometry toolbar:

- ◇  Divide the surface in n even parts
- ◇  Divide the surface through a path of lines
- ◇  Intersect the surface through lines
- ◇  Intersect the surface with other surfaces

### 3.0.3 Create volumes

1 In order to create volumes there are multiple options:

- ◇  click on create object and choose either: **Sphere, Cylinder, Cone, Prism** or **Thorus**. And draw the volume in the geometry view, or fill in the coordinates in the command line.
- ◇ In this option, a volume is created by stretching a surface in the 3rd dimension.
  - 1.1 In the top menu bar go to: Utilities -> Copy. . .
  - 1.2 In the Copy window set entities type to "Surfaces"
  - 1.3 In the Copy window set Transformation to "Translation"
  - 1.4 In the Copy window set the first and second point (there should be a difference between the z values in order to create a volume)
  - 1.5 In the Copy window set Do extrude to "Volumes" and unselect "Create contacts" in order to create a volume with more than 1 element in the Z-direction
- ◇ An other option is to create a volume from connected surfaces. Create surfaces and connect them until a closed 3 dimensional shape is formed. Click on "create volume"  and select the surfaces in the geometry view which should form the boundaries of the volume. Press ESC to finish.

## 4 Define problem

When the geometry is created, the problem can be defined.

### 4.0.1 Materials





todo

### 4.0.2 Boundary conditions

todo

- 1 Before the boundary conditions can be assigned to the geometry, it is important to understand the following box:



- ◇ Use the text box to fill in the identifier of the condition (for example the condition name) or select an existing boundary condition
- ◇ Click on  to assign the boundary condition to lines, click on  to assign the boundary condition to surfaces.
- ◇ Click on  to assign the filled in boundary condition values to an existing boundary condition which is selected in the text box.
- ◇ Click on  to create a new group and assign the group to the geometry (lines or surfaces, depending which option is chosen)

### 4.0.3 Structural elements and interfaces

- 1 To create a structural element, on the top menu bar click on *GeoMechanicsApplication* => *elements*.
- 2 From the *Elements* window which appeared, from the top drop-down menu. Select the preferred structural element (Beam, Shell thin corotational, Shell thick corotational, Truss or Cable). The structural element can then be assigned to the geometry.
- 3 In order to create an interface between the soil and the structural element. Multiple GiD-layers need to be created in GiD. One layer needs to be the layer of the structural elements, the next layer is the soil on one side of the structural element, the next layer being the soil on the other side of the structural element.

## 5 Meshing

Before a calculation can be done with KratosGeoMechanics, it is required to generate the mesh. Every time something is changed in the geometry, the mesh has to be regenerated. So for example:

- ◇ The geometry has been changed
  - ◇ A new or different boundary condition is assigned
  - ◇ A different material is assigned to an existing surface or volume
- 1 In the top menu bar click: Mesh->Element type to choose the element type of your mesh. For a 2D domain choose either triangle elements or quadrilateral elements. For a 3D domain choose either Tetrahedra, hexahedra or Prism elements. Line elements are automatically set as Bar elements.
  - 2 The size of the mesh can be set locally.
    - ◇ In the top menu bar click: "Mesh->Unstructured->Assign sizes on lines/surfaces/volumes" to assign the size of the unstructured mesh on respectively lines,surfaces or volumes.
    - ◇ In the top menu bar click: "Mesh->Structured->Assign sizes on lines/surfaces/volumes" to assign the size of the structured mesh on respectively lines,surfaces or volumes.
  - 3 To alter the size transition from small elements to large elements in an unstructured mesh, In the top menu bar click: Utilities->Preferences. In the Preferences window, go to Meshing->Unstructured. In this window, the "Unstructured size transition" can be altered. It controls whether the transitions between different element sizes are slow (near to 0) or fast (near to 1), where the default is 0.6. Select the preferred size transition number and click on apply.

## 6 Calculating

TODO

A staged calculation cannot be calculated via GiD. This has to be done via the command prompt or python.


- 4 Take the template file "MainKratos\_multiple\_stages\_template.py" from ./KratosGeoMechanics/applications/GeoMechanicsApplication. And copy it to the main KratosGeoMechanics directory. Rename the file to "MainKratos.py"
- 5 right click on "MainKratos.py" and select "edit".
- 6 Edit the project\_paths variable such that it refers to the correct \*.gid files. Note that the file paths should stay within the quotation marks.
- 7 In windows explorer, go to the KratosGeoMechanics directory. In the adress-bar, type in: "cmd" and press "enter", such that command prompt is opened while already referring to the correct directory. In the command prompt, type in: "runkratos MainKratos.py". Now the calculation should start running with as many stages as preferred.

## 7 PostProcess

## 8 Tutorial 1: Dike

The first tutorial shows how to create a dike with multiple layers and multiple piezometric levels. Note that this tutorial is meant to show the possibilities of KratosGeoMechanics in GiD, rather than creating a realistic dike.

### 8.1 Geometry

- 1 In GiD, press the icon  and draw the outlines of your geometry according to Table 8.1. Make sure to press "Join" in the Create point procedure when connecting the last line to the first point.

**Table 8.1:** Outline geometry tutorial 1

| Line ID | Point 1 (x,y) | Point 2 (x,y) |
|---------|---------------|---------------|
| 1       | -50, -15      | 50, -15       |
| 2       | 50, -15       | 50, 0         |
| 3       | 50, 0         | 10, 0         |
| 4       | 10, 0         | 0, 5          |
| 5       | 0, 5          | -5, 5         |
| 6       | -5, 5         | -15, 0        |
| 7       | -15, 0        | -50, 0        |
| 8       | -50, 0        | -50, -15      |

- 2 Now create lines to set the outlines of the soil layers. According to Table 8.2.


**Table 8.2:** Outline soil layer tutorial 1

| Line ID | Point 1 (x,y) | Point 2 (x,y) |
|---------|---------------|---------------|
| 9       | (-50, -10)    | (50, -10)     |
| 10      | (-15, 0)      | (10, 0)       |



- 3 Create vertical lines at the location of the turning points of the phreatic level which will be created in a further step, according to Table 8.3.


**Table 8.3:** Verticals turning points phreatic line tutorial 1

| Line ID | Point 1 (x,y) | Point 2 (x,y) |
|---------|---------------|---------------|
| 11      | (-7.5, 5)     | (-7.5, -15)   |
| 12      | (-15, 0)      | (10, 0)       |

- 4 Create all the intersections between the lines by clicking on the  button and selecting everything. The outlines should look as displayed in Figure 8.1. Further references to line ID's are done using the line ID's as shown in the figure.

- 5 Create surfaces by clicking on the  button and selecting the lines as displayed in Table 8.4.


- 6 Delete line (19) and the attached point by clicking on the  and the  in the Geometry toolbar. The geometry should look like as displayed in Figure 8.2. Further references to surface ID's are made to the ID's as shown in the figure.

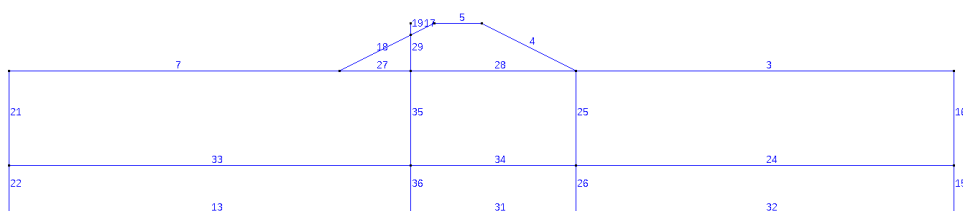

**Figure 8.1:** All outlines tutorial 1



**Table 8.4:** Surfaces tutorial 1
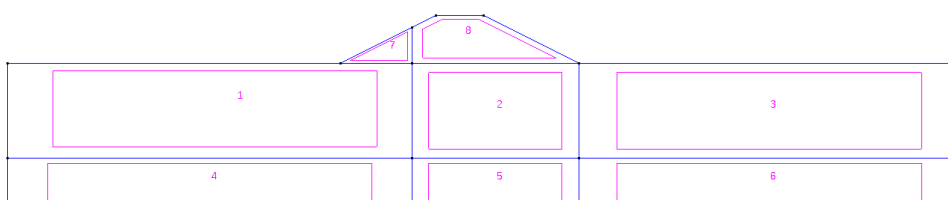
| Surface ID | line ID's           |
|------------|---------------------|
| 1          | (7, 27, 35, 33, 21) |
| 2          | (28, 25, 34, 35)    |
| 3          | (3, 16, 24, 25)     |
| 4          | (33, 36, 13, 22)    |
| 5          | (34, 26, 31, 36)    |
| 6          | (24, 15, 32, 26)    |
| 7          | (18, 29, 27)        |
| 8          | (17, 5, 4, 28, 29)  |



**Figure 8.2:** Geometry tutorial 1

## 8.2 Boundary conditions

- 7 The next step is setting the boundary conditions. In this tutorial, the side boundaries can move freely in vertical direction; the bottom boundary is fixed. In the top menu bar, select *GeoMechanicsApplication->Dirichlet Constraints*. The window as shown in Figure 8.3 should appear.
- 8 For the side boundaries, deselect "*SOLID DISPLACEMENT Y*". Now in the bottom left corner of the Dirichlet Constraints window, fill in "side boundary". In this same window click on the line button . And click on the create new group button, . Now select the lines (21, 22, 15, 16) in the geometry and press "ESC".
- 9 For the bottom boundary, in the Dirichlet Constraints window, select all the *SOLID DISPLACEMENT* buttons and keep the values at 0. Name this boundary "bottom boundary", and assign this boundary condition to the lines (13, 31, 32).

## 8.3 Materials

- 10 Now the materials have to be assigned to the surfaces. In this tutorial, 3 materials will be created. In the top menu bar, select *GeoMechanicsApplication->Elements*. A new window should appear.
- 11 In the elements window which appeared, from the top drop-down menu, select "soil-drained". And fill in the values as shown in Figure 8.4. For the parameter, "UDSM

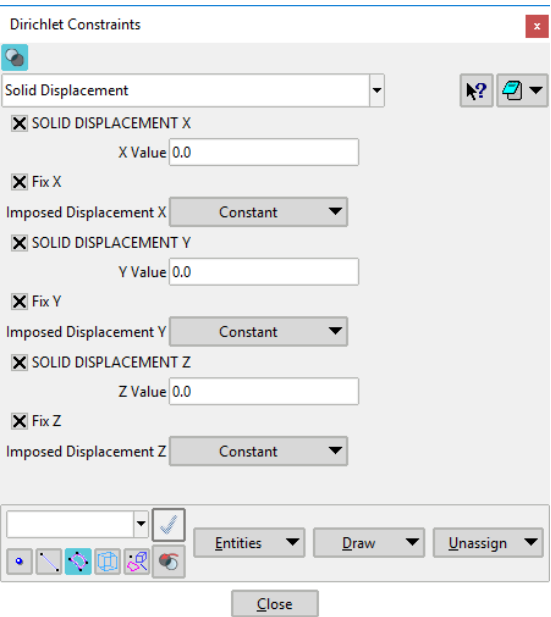


Figure 8.3: Dirichlet constraints window

Name", fill in the address of the "MohrCoulomb.dll", including extension. For the de-  
scription of the Mohr Coulomb parameters, see @@@. Assign the material to the  
surfaces (1, 2, 3).

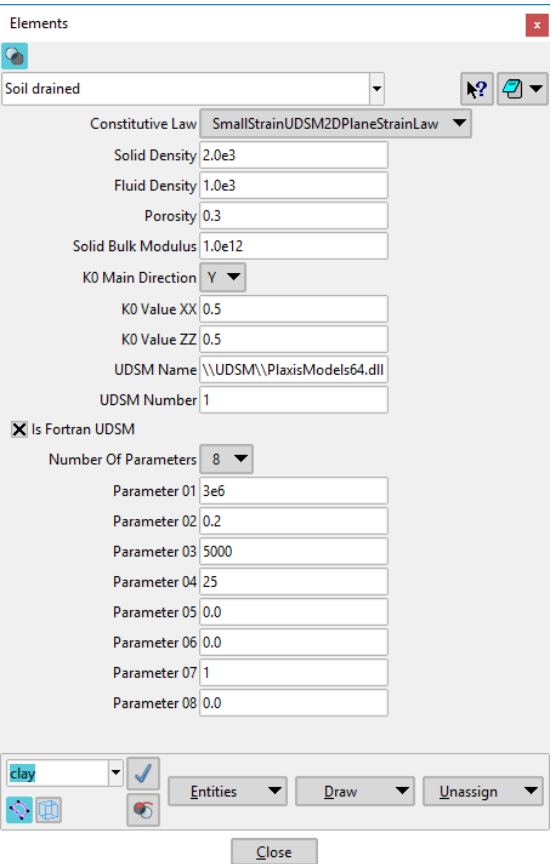


Figure 8.4: Clay parameters tutorial 1

- 12 For the second material, select "soil-drained" and fill in the parameters as shown in Figure 8.5. Again for the "UDSM Name" fill in the address if the "MohrCoulomb.dll", including extension. Assign the material to the surfaces (4, 5, 6)

The screenshot shows the 'Elements' dialog box with the following parameters:

- Material: Soil drained
- Constitutive Law: SmallStrainUDSM2DPlaneStrainLaw
- Solid Density: 2650
- Fluid Density: 1.0e3
- Porosity: 0.3
- Solid Bulk Modulus: 1.0e12
- K0 Main Direction: Y
- K0 Value XX: 0.5
- K0 Value ZZ: 0.5
- UDSM Name: address/to/the/UDSM
- UDSM Number: 1
- Is Fortran UDSM: ☒
- Number Of Parameters: 8
- Parameter 01: 7.5e7
- Parameter 02: 0.2
- Parameter 03: 1000
- Parameter 04: 35
- Parameter 05: 0.0
- Parameter 06: 0.0
- Parameter 07: 1
- Parameter 08: 0.0

Buttons at the bottom: Entities, Draw, Unassign, Close.

**Figure 8.5:** Sand parameters tutorial 1

- 13 For the last material, again select "soil-drained" and fill in the parameters as shown in Figure 8.6, again referring to "MohrCoulomb.dll" for "UDSM Name". Assign the material to surfaces (7, 8).

## 8.4 Water


- 14 The first water level to be added is the river water level. Click on *GeoMechanicsApplication* -> *Dirichlet Constraints*. In the Dirichlet Constraints window, select Fluid Pressure from the top drop-down menu. Fill in the parameters as shown in Figure 8.7. Assign this fluid pressure to line 7.
- 15 Now rename the previous Fluid pressure condition to "river\_level\_surface". And assign the condition to surface 7
- 16 The water pressure due to the river water level is now set, however since the water level lies above the surface, it is required to explicitly define the normal load due to the water. Click on *GeoMechanicsApplication* -> *Loads*. From the top drop-down menu in de Loads window, select *Normal Load*. Fill in the values as shown in Figure 8.8. Assign the condition to the lines 17 and 18.

**Figure 8.6:** Dike parameters tutorial 1

- 17 The water level in the dike is an inclined phreatic line. Click on *GeoMechanicsApplication* -> *Dirichlet Constraints*. Select *Fluid Pressure* from the top drop-down menu in the Dirichlet Constraints table and fill in the values as shown in Figure 8.9. Assign the condition to surface 8.
- 18 For the last part of the phreatic level, select *fluid pressure*, choose *Hydrostatic* pressure distribution. Set the reference coordinate on -15. In the Fluid pressure table fill in 0 on time 0 and 2; fill in 15 at time 3 and 4. Name the condition "polder\_level" and assign the condition to line 3.
- 19 Now for the water level in the aquifer, select *fluid pressure*, choose *Hydrostatic* pressure distribution. Set the reference coordinate on -15. In the Fluid pressure table fill in 0 on time 0 and 2; fill in 18 at time 3 and 4. Name the condition "aquifer\_level" and assign the condition to surface 4, 5 and 6.
- 20 Lastly, select *Interpolate line* pressure distribution, set *Imposed Pressure* on *Table Interpolation* and assign the condition to surface 1, 2 and 3.

## 8.5 Loads

- 21 In this tutorial, the only loads will be applied are water loads and the own weight of the soils. The water loads are already applied in the previous section. To apply the soil

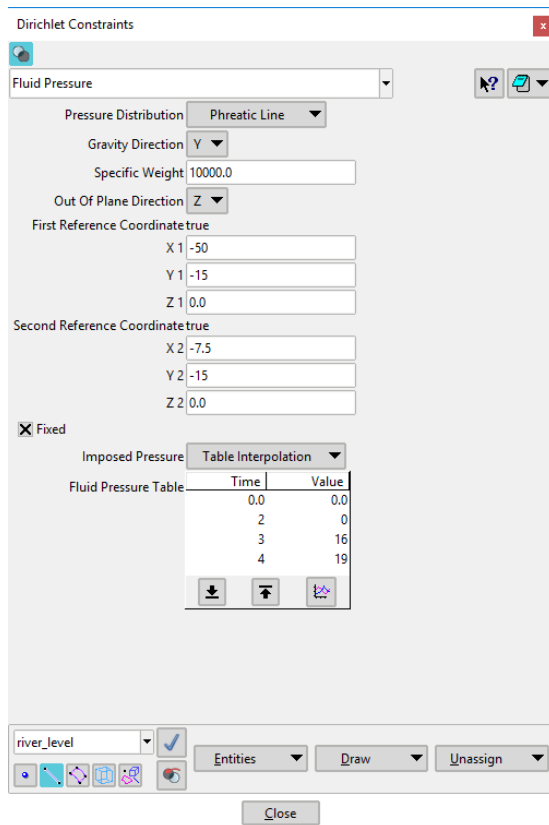

**Figure 8.7:** River water level tutorial 1

weight, click on *GeoMechanicsApplication* -> *Loads* and select *Body Acceleration* from the drop-down menu.

- 22 In the Loads window, for *Imposed Body Acceleration Y* select table interpolation. Fill in 0 for time 0; and fill in -9.81 for time 1 and 4. Name this load "body\_surface" and assign the condition to the surfaces: 1, 2, 3, 4, 5, 6.
- 23 For the self weight of the dike, in the Loads window, for *Imposed Body Acceleration Y* select table interpolation. Fill in 0 for time 0 and 1; and fill in -9.81 for time 2 and 4. Name this load "body\_dike" and assign the condition to the surfaces: 7, 8.

## 8.6 Meshing

- 24 On the top menu bar, click on *Mesh* -> *Unstructured* -> *Assign sizes on surfaces*. Fill in 1.0 in the dialog window which pops up. And assign this size on the surfaces 7 and 8.
- 25 Now fill in 3.0 in the dialog window and assign this size to the surfaces: 1, 2, 3, 4, 5, 6.
- 26 On the top menu bar, click on *Mesh* -> *Quadratic type* -> *Quadratic*. Such that quadratic elements are generated.
- 27 On the top menu bar, click on *Mesh* -> *Generate mesh....* A Mesh generation window pops up where the element size of the mesh can be filled in. However, since the mesh size of all the surfaces is already defined in previous steps, the number which is filled in into the mesh generation window does not matter.

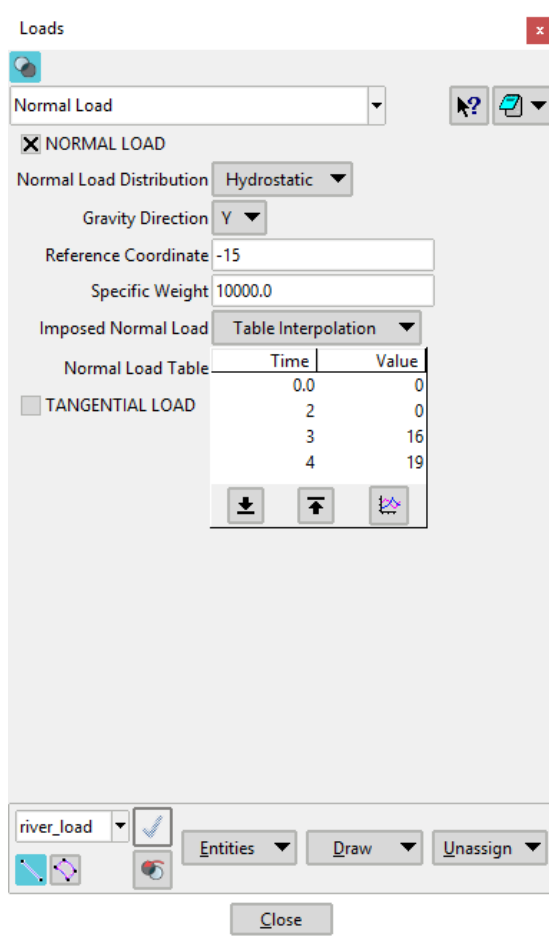


Figure 8.8: River load tutorial 1

## 8.7 Project Parameters

- 28 Before the model can be calculated, the project parameters should be filled in correctly. Click on *GeoMechanicsApplication* -> *Project Parameters*. The problem data Window should appear.
- 29 In the *Problem data* window on the *Problem Data* tab, set the *Start Time* to 0.0 and the *End Time* to 4.0.
- 30 For the first calculation in this tutorial, in the *Problem data* window on the *Solver Settings* tab, set *Displacement Relative Tolerance* on 1e-2. Keep the rest of the settings on the default values. And press *Accept*.

## 8.8 Calculate

- 31 In order to calculate, on the top menu bar click on *Calculate* -> *Calculate*
- 32 Calculation progress can be monitored by clicking on *Calculate* -> *View Process info...*
- 33 Make sure to save after the calculation is done

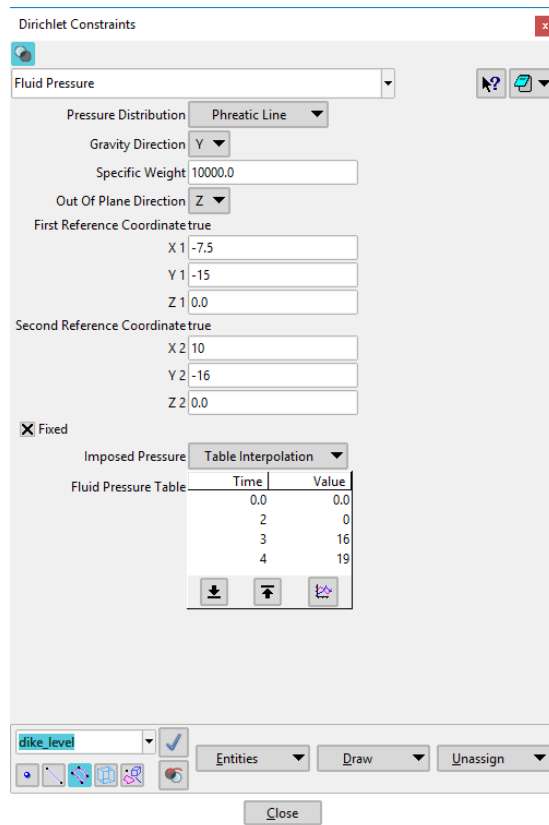





Figure 8.9: Dike water level tutorial 1

## 8.9 Post-process part 1

- 34 After calculation, check the results in the post-process window by clicking on the  icon on the Standard GiD Toolbar.
- 35 As an intermediate check before going on to the next part of the tutorial, check if the Water Pressure, the x-displacement and the y-displacement are calculated correctly. In Post-process, click on  and select: "WATER PRESSURE", then "DISPLACEMENT -> X-DISPLACEMENT" and lastly, "DISPLACEMENT -> y-DISPLACEMENT". Check if the contours are the same as shown in Figure 8.10
- 36 Go back to the pre-process window. If the results are equal go on to the next part of the tutorial, if not, check if all input is correctly filled in.

## 8.10 Staged construction

- 37 While Kratos GeoMechanics can handle staged calculation, the GiD problemtype can not. In order to perform a staged calculation, some additional actions have to be performed within and outside the GiD pre-processor. The following stages will be added:
- ◇ Initial stage
  - ◇ Addition of dike load
  - ◇ Addition of daily water level
  - ◇ High water level

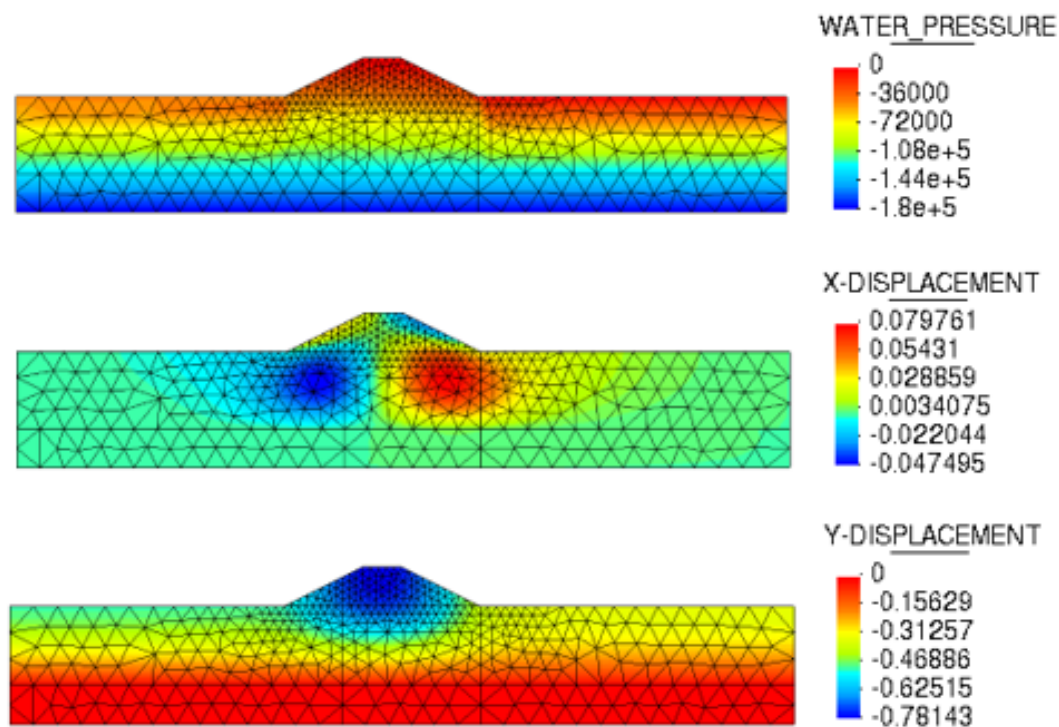

**Figure 8.10:** Contour results tutorial 1 part 1, top to bottom: water pressure, x-displacement, y-displacement

### 38 Stage 1:

- 38.1 Save the existing file as "tutorial\_1\_stage\_1"
- 38.2 Go to *GeoMechanicsApplication* -> *Dirichlet Constraints* -> *Excavation*. Select the option *Deactivate soil*. Name the condition `dike_excavation` and assign the condition to the surfaces 7 and 8.
- 38.3 Go to *GeoMechanicsApplication* -> *Problem data*. On the Problem data tab, set start and end time from 0.0 to 1.0.
- 38.4 On the Solver Settings tab, set Solution type to K0- procedure. And set the Displacement Relative Tolerance on 1e-3.
- 38.5 Re-mesh.
- 38.6 Click on Calculate and then cancel process. Note that clicking on Calculate is necessary to generate the input files. Results of the in between stages are not relevant, therefore it is not required to wait until the calculation is finished.
- 38.7 Save the project again

### 39 Stage 2

- 39.1 Save the existing file as "tutorial\_1\_stage\_2"
- 39.2 Go to *GeoMechanicsApplication* -> *Dirichlet Constraints* -> *Excavation*. Deselect the option *Deactivate soil* of the `dike_excavation` condition.
- 39.3 Go to *GeoMechanicsApplication* -> *Problem data*. On the Problem data tab, set start and end time from 1.0 to 2.0.
- 39.4 On the Solver Settings tab, set Solution type to Quasi-Static.

- 39.5 Re-mesh.
- 39.6 Click on Calculate and then cancel process.
- 39.7 Save the project again

#### 40 Stage 3

- 40.1 Save the existing file as "tutorial\_1\_stage\_3"
- 40.2 Go to *GeoMechanicsApplication* -> *Problem data*. On the Problem data tab, set start and end time from 2.0 to 3.0.
- 40.3 Click on Calculate and then cancel process.
- 40.4 Save the project again

#### 41 Stage 4

- 41.1 Save the existing file as "tutorial\_1\_stage\_4"
- 41.2 Go to *GeoMechanicsApplication* -> *Problem data*. On the Problem data tab, set start and end time from 3.0 to 4.0.
- 41.3 Go to *GeoMechanicsApplication* -> *Dirichlet Constraints* -> *Fluid Pressure*, set Y 2 of the dike `dike_level` condition on -19.
- 41.4 Click on Calculate and then cancel process.
- 41.5 Save the project again

### 8.11 Calculate staged construction

A staged calculation cannot be calculated via GiD. This has to be done via the command prompt or python.

- 42 Take the template file "MainKratos\_multiple\_stages\_template.py" from `./KratosGeoMechanics/applications/GeoMechanicsApplication`. And copy it to the main KratosGeoMechanics directory. Rename the file to "MainKratos.py"
- 43 right click on "MainKratos.py" and select "edit".
- 44 Edit the `project_paths` variable such that it refers to the correct \*.gid files. Note that the file paths should stay within the quotation marks.
- 45 In windows explorer, go to the KratosGeoMechanics directory. In the adress-bar, type in: "cmd" and press "enter", such that command prompt is opened while already referring to the correct directory. In the command prompt, type in: "runkratos MainKratos.py". Now the calculation should start running with as many stages as preferred.

### 8.12 Post-process part 2

when all the stages are calculated, all the stages can be viewed separately in post process.

- 46 In GiD go to post-processing.
- 47 Select "Open PostProcess" and go to the directory of your preferred stage. Click on the \*.bin file to open the postprocess file.
- 48 Note that "DISPLACEMENT" shows the displacement of the current stage. "TOTAL\_DISPLACEMENT" shows the total displacement over the previously calculated stages.