

Structural Cost of Optimized Reinforced Concrete Isolated Footing

Mohammed S. Al-Ansari

Abstract—This paper presents an analytical model to estimate the cost of an optimized design of reinforced concrete isolated footing base on structural safety. Flexural and optimized formulas for square and rectangular footing are derived base on ACI building code of design, material cost and optimization. The optimization constraints consist of upper and lower limits of depth and area of steel. Footing depth and area of reinforcing steel are to be minimized to yield the optimal footing dimensions. Optimized footing materials cost of concrete, reinforcing steel and formwork of the designed sections are computed. Total cost factor TCF and other cost factors are developed to generalize and simplify the calculations of footing material cost. Numerical examples are presented to illustrate the model capability of estimating the material cost of the footing for a desired axial load.

Keywords—Footing, Depth, Concrete, Steel, Formwork, Optimization, Material cost, Cost Factors.

I. INTRODUCTION

SAFETY and reliability were used in the flexural design of reinforced concrete footings using ultimate-strength design method used under the provisions of ACI building code of design [1, 2, 3, 4]. Footings are very important structure members and the most common shape of reinforced concrete footing is square footing. Footing sizes are mostly governed by the axial load P , allowable soil pressure q_a , unit weight of concrete γ_c , soil unit weight γ_s , and the depth of the footing base below the final grade. The optimized dimensions of reinforced concrete footing could be achieved by minimizing the optimization function of slab depth and reinforcing steel area, fig. 1, [5, 6, 7].

This paper presents an analytical model to estimate the cost of an optimized design of reinforced concrete footings with yield strength of nonprestressed reinforcing steel bars f_y and compression strength of concrete f_c base on shear and flexural capacities of the footing. The optimization of footings is formulated to achieve the best footing dimension that will give the most economical section to resist the external axial loads P that is made of summation of dead loads DL and live loads LL . The optimization is subjected to the design constraints of the building code of design ACI such as maximum and minimum reinforcing steel area, footing depth, developmental length in tension and compression, [8, 9, 10].

The total cost of the footing materials is equal to the summation of the cost of concrete, steel and formwork. Total cost factor TCF, cost factor of concrete CFC, Cost Factor of steel CFS, and cost factor of timber CFT are developed to

generalize and simplify the estimation of footing material cost. The required footing area F_A is computed based on the axial load P and the effective soil pressure Q_e :

$$F_A = \frac{P}{Q_e} = \frac{DL + LL}{Q_e} \quad (1)$$

$$Q_e = Q_a - W_c - W_s \quad (1a)$$

$$W_c = \gamma_c * h \quad (1b)$$

$$W_s = \gamma_s * D_f \quad (1c)$$

where

F_A = Footing Area

Q_a = Allowable Soil Pressure

Q_e = Effective Soil Pressure

W_c = Concrete Weight

W_s = Soil Weight

h = Total Footing

A. Shear and Flexural Design Formulas

Both one-way shear and two-way shear are considered for estimating the footing effective depth, Fig. 2.

The ACI design code 2008 formulas for one way shear depth:

$$d_{one\ way} = \frac{Vu}{\phi_s \gamma_c b_w} \quad (\text{ACI Eq. 11 - 3})$$

where

d = Effective depth

Vu = Factored shear force

ϕ_s = Shear reduction factor

γ_c = Shear stress carried by the concrete

b_w = Footing width

The ACI design code 2008 formulas for two way shear depth, is the largest value obtained from the following equations:

$$d_{2wl} = \frac{6 Vu}{\phi_s \left(1 + \frac{8}{\beta_c}\right) \sqrt{f_c} b_o} \quad (\text{ACI Eq. 11 - 31})$$

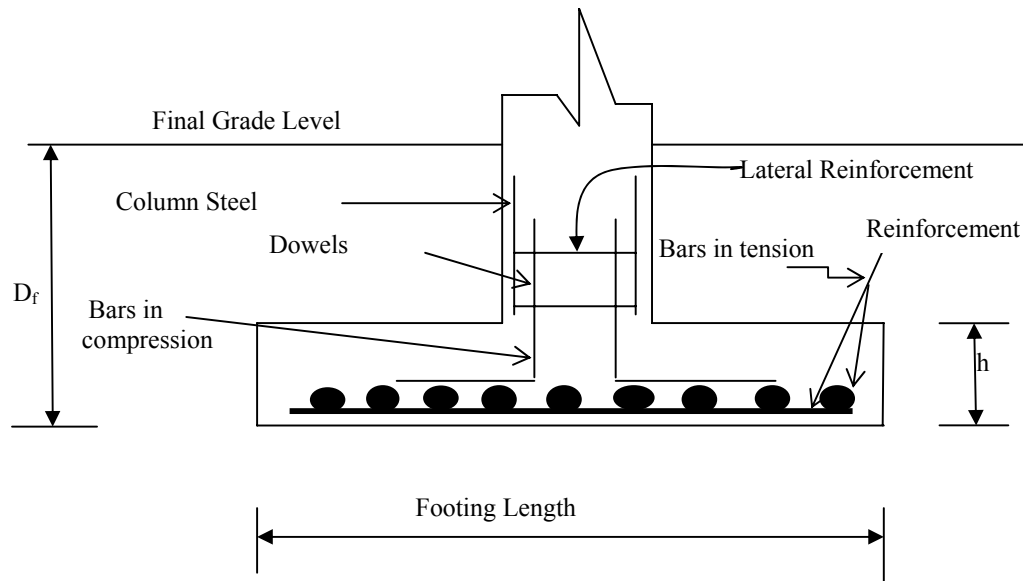


Fig. 1 Isolated Footing Dimensions and Reinforcement Detailing

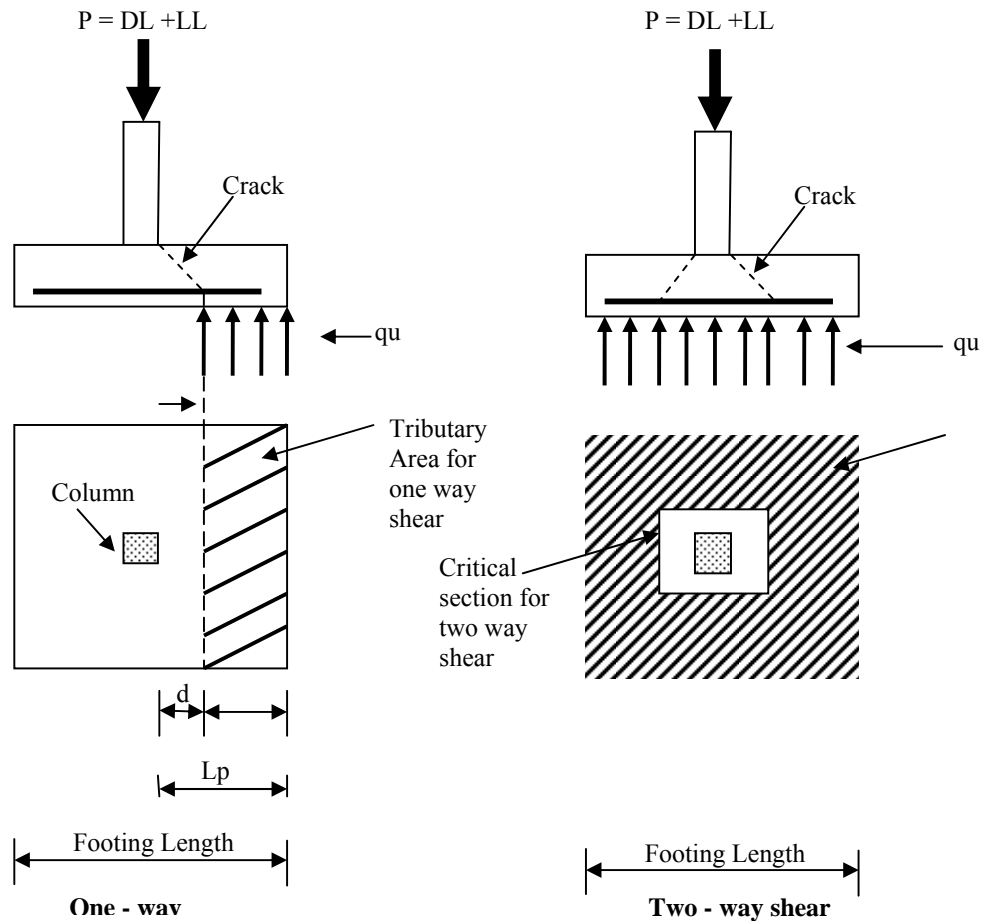


Fig. 2 Shear in footing

The ACI design code 2008 formulas for one way shear depth:

$$d_{one\ way} = \frac{Vu}{\phi_s v_c b_w} \text{ (ACI Eq. 11 - 3)}$$

where

d = Effective depth

Vu = Factored shear force

ϕ_s = Shear reduction factor

v_c = Shear stress carried by the concrete

b_w = Footing width

The ACI design code 2008 formulas for two way shear depth, is the largest value obtained from the following equations:

$$d_{2wl} = \frac{6 Vu}{\phi_s \left(1 + \frac{8}{\beta_c}\right) \sqrt{f'c} b_o} \text{ (ACI Eq. 11 - 31)}$$

$$d_{2wII} = \frac{12 Vu}{\phi_s \left(2 + \frac{\alpha_s}{b_o}\right) \sqrt{f'c} b_o} \text{ (ACI Eq. 11 - 32)}$$

$$d_{2wIII} = \frac{3 Vu}{\phi_s \sqrt{f'c} b_o} \text{ (ACI Eq. 11 - 33)}$$

where

β_c = Ratio of long side of the column to the short of the column

$f'c$ = Specified compression strength of concrete

b_o = Perimeter around the punching area

α_s = Ratio equals to 40, 30 and 20 for interior column, edge column and corner column respectively

The bending moments Mu in both axes are considered at the face of the column Fig. 3.

$$Mu = \frac{L_p^2}{2} q_u b_w \quad (2)$$

$$q_u = \frac{Pu}{F_A} = \frac{DL * DLF + LL * LLF}{F_A} \quad (2a)$$

where

Mu = Fully factored bending moment

L_p = Projected length

q_u = Bearing pressure for strength design

DLF = Dead Load Factor equal 1.2

LLF = Live Load Factor equal 1.6

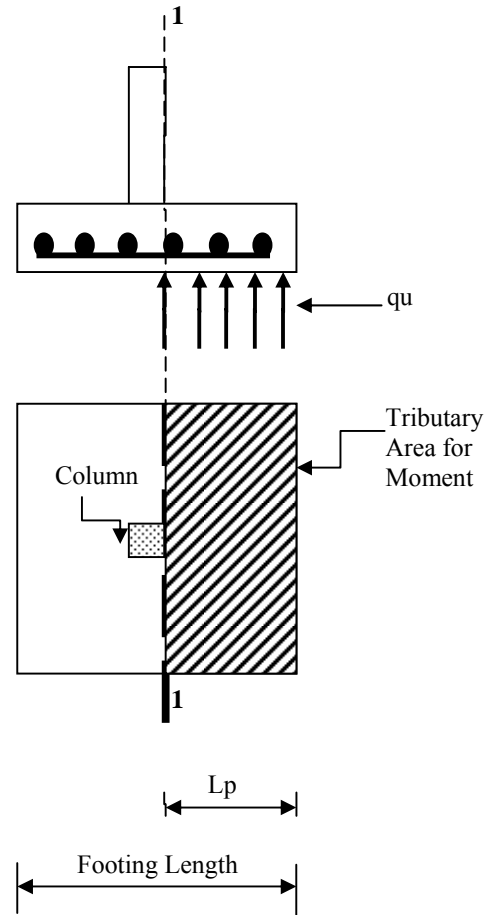


Fig. 3 Moment in footing about section 1-1

The reinforcement area As of the footing

$$As = \frac{Mu}{\phi_b f_y \left(d - \frac{a}{2}\right)} \quad (3)$$

where

ϕ_b = Bending reduction factor

f_y = Specified yield strength of nonprestressed reinforcing

As = Area of tension steel

d = Effective depth

a = Depth of the compression block

B. Footing Optimization

The optimization of isolated footing is formulated to achieve the best footing dimensions that will give the most economical footing size and steel reinforcement to resist the ultimate bending moment Mu . The optimization is subjected to the constraints of the building code of design ACI for depth, reinforcement and footing size. The optimization function of the footing

Minimize

$$F(As, d) = \phi_b As f_y \left(d - \frac{a}{2}\right) - Mu \quad (4)$$

Must satisfy the following constraints:

$$d_S^L \leq d \leq d_S^U \quad (4a)$$

$$A_{S_S}^{Mini} \leq A_S \leq A_{S_S}^{Max} \quad (4b)$$

$$A_S^{Max} = 0.75 * \beta_1 * \frac{f_c}{f_y} \left(\frac{600}{600 + f_y} \right) bd \quad (4c)$$

$$A_S^{Mini} = \left(\frac{1.4}{f_y} \right) bd \quad (4d)$$

$$\beta_1 = 0.85 \text{ for } f_c \leq 30 \text{ MPa} \quad (4e)$$

$$\beta_1 = 0.85 - 0.008(f_c - 30) \geq 0.65 \text{ for } f_c > 30 \text{ MPa} \quad (4f)$$

where d_B^L and d_B^U are footing depth lower and upper bounds, and $A_{S_B}^{Mini}$ and $A_{S_B}^{Max}$ are slab steel reinforcement area lower and upper bounds. The reinforcing bars must have the required length to provide sufficient strength. In other words, the bars must extend developmental length L_d from the face of the column.

$$L_d < L_{d_{AVAILABLE}} \quad (4g)$$

where

L_d = Required bar developmental length (ACI Section 12.2)

$L_{d_{AVAILABLE}}$ = Available length in tension (ACI Section 12.3)

For the dowel bars under compression

$$A_{dowels} \geq 0.005 A_{column} \quad (4h)$$

$$L_{d_{comp}} < L_{d_{AVAILABLE}} \quad (4i)$$

$$h > L_{d_{comp}} + Cover + 2d_b \quad (4j)$$

where

A_{dowels} = Steel area of the dowels

A_{column} = Column area

$L_{d_{comp}}$ = Required bar developmental length in compression

$L_{d_{AVAILABLE}}$ = Available length in compression

h = Total footing depth

$Cover$ = Concrete cover thickness

d_b = Bar diameter

C. Footing Formwork Materials

The form work material is limited to footing four sides of 20 mm thickness, Fig. 4. The formwork area AF of the isolated footing

$$AF_{SQUARE} = 4(0.2(B * h)) \quad (5)$$

$$AF_{RECTANGULAR} = 2 * 0.2 * h(B + L) \quad (5a)$$

D. Footing Cost Analysis

The total cost of the beam materials is equal to the summation of the cost of the concrete, steel and the formwork per square meter:

$$\frac{Total \text{ Cost}}{m^2} = \frac{Ag(m^2)}{m} * C_c + \frac{As(m^2)}{m} * \frac{\gamma_s \left(\frac{Ton}{m^3} \right)}{m} * C_s + \frac{AF(m^2)}{m} * C_f \quad (6)$$

where

C_c = Cost of 1 m³ of ready mix reinforced concrete in dollars

C_s = Cost of 1 Ton of steel in dollars

C_f = Cost of 1 m³ timber in dollars

γ_s = Steel density = $7.843 \frac{Ton}{m^3}$

Total Cost Factor TCF and other cost factors are developed to generalize and simplify the calculations of footing material cost.

$$CFC = \frac{(Concrete \text{ Cost})}{m^2} = \frac{Ag(m^2)}{m} * C_c \quad (7)$$

$$CFS = \frac{Steel \text{ Cost}}{m^2} = \frac{As(m^2)}{m} * \gamma_s \left(\frac{Ton}{m^3} \right) * C_s \quad (8)$$

$$CFT = \frac{Timber \text{ Cost}}{m^2} = \frac{AF(m^2)}{m} * C_f \quad (9)$$

and

$$TCF = CFC + CFS + CFT = \frac{Total \text{ Cost}}{m^2} \quad (10)$$

where

CFC = Cost Factor of Concrete

CFS = Cost Factor of Steel

CFT = Cost Factor of Timber

TCF = Total Cost Factor

Therefore the total cost of the footing is equal to the product of the total cost factor TCF and the footing area.



Fig. 4 Footing formwork material – Four sides

TABLE I
FOOTING DIMENSIONS

Axial Design Loads kN		Soil Pressure Qa kN/m ²	Footing Dimensions					
Service Load kN	Ultimate Load kN		Analytical Model			Software STAAD Foundation		
			Depth	Steel Area	Length	Depth	Steel Area	Length
			mm	mm ²	m	mm	mm ²	m
500	700	200	340	1502	1.7	350	1863	1.63
900	1260		455	2913	2.3	440	3310	2.19
1400	1960		550	4400	2.9	540	4972	2.74
2100	2940		640	6686	3.55	650	7218	3.4
2500	3500		700	8125	3.9	700	8687	3.7
3200	4480		780	1034	4.4	800	10604	4.2

TABLE II
FOOTING TOTAL COST

Axial Design Loads kN		Footing Area m ²	Total Cost \$	
Service Load DL + LL kN	Ultimate Load DL(1.2) + LL(1.6) kN		Qatar	USA
800	1120	4.84	396	409
1500	2100	9	958	990
2000	2800	12.25	1457	1505
2600	3640	16	2100	2177
3300	4620	20.25	3037	3135
4000	5600	25	4044	4174

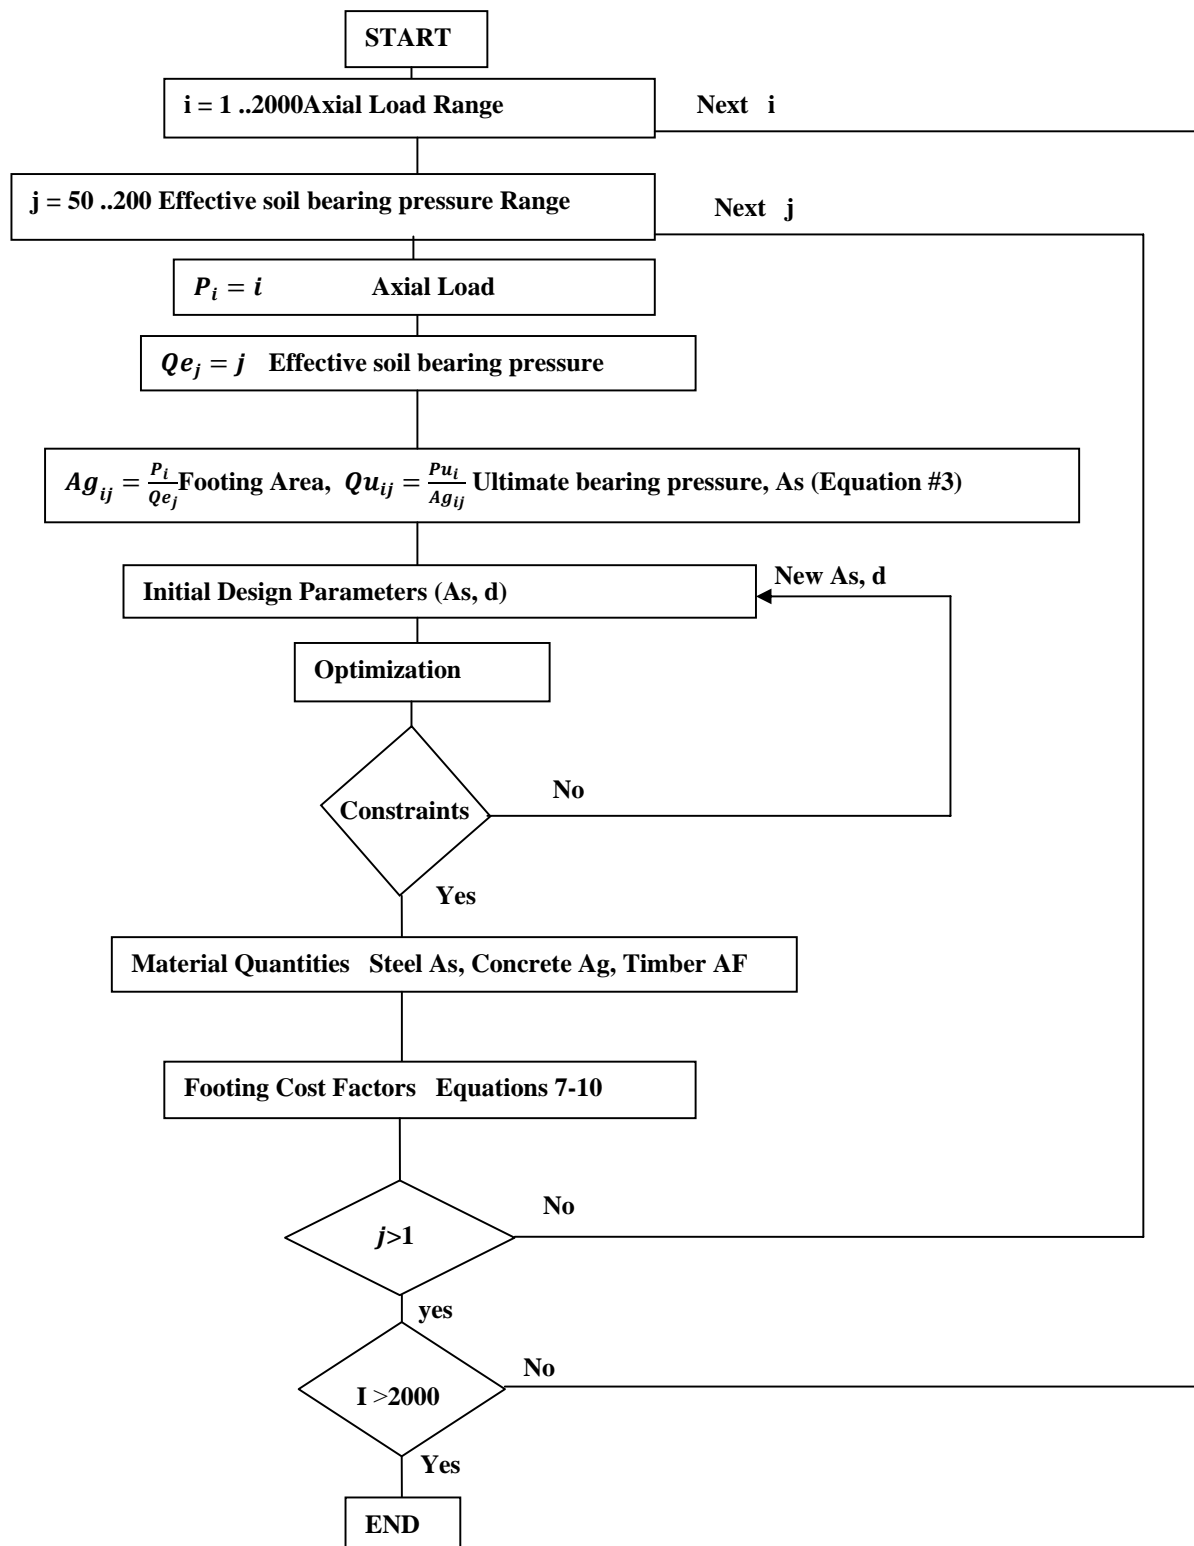


Fig. 5 The Process of Computing Cost Factors

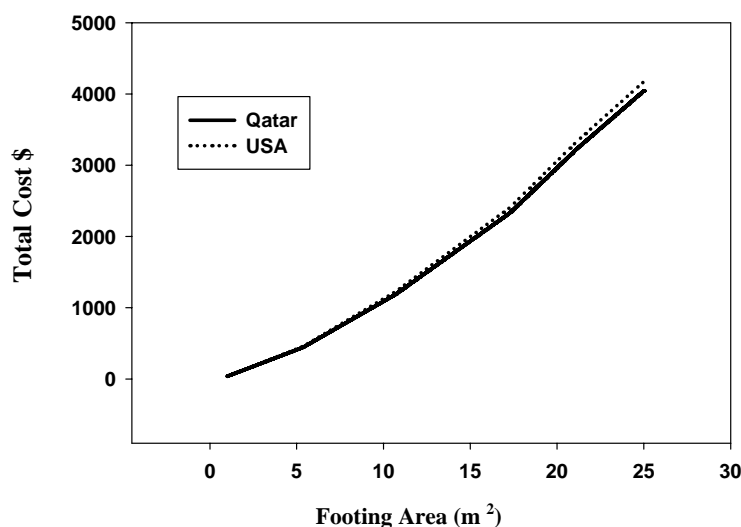


Fig. 6 Total Material Cost of Isolated Footing \$

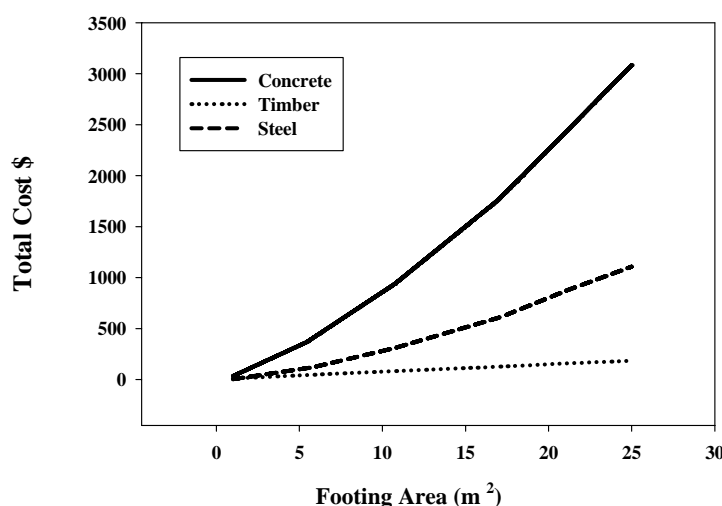


Fig. 7 Material Cost of Isolated Footing

II. RESULT AND DISCUSSION

The footing were analyzed and designed optimally to ACI code of design in order to minimize the total cost of the footing that includes cost of concrete, cost of steel, and formwork cost. The footings were subjected to different dead load DL, live load LL, and effective soil pressure Q_e . In order to optimize the footing size, thickness, and steel area, a list of constraints (equations 4-4J) that contain shear, bending and developmental length have to be met. Areas of concrete, reinforcing steel and timber area AF (equations 5-5A) are computed based on optimum footing dimensions. The formwork area AF of the slab cross section is made of four vertical sides of 20mm thickness and height of footing total depth. The total cost of footing material is calculated using equation 6 base on Qatar and USA prices respectively of \$100,\$131 for 1 m³ of ready mix concrete, \$1070,\$1100 for

1 ton of reinforcing steel bars, and \$531,\$565 for 1 m³ of timber. Total Cost Factor TCF, Cost Factor of concrete CFC, Cost Factor of steel CFS, and Cost Factor of Timber CFT, are developed in equations 7 - 10 to generalize and simplify the calculation of footing material cost. To determine the cost factors that are to be used for estimating the footing material cost, an iterative cost safety procedure of estimating the footing material cost base on optimal criteria is applied to external axial load range of 10kN to 2000kN as the maximum axial load, Fig. 5. The design parameter used in iterative cost procedure are 400 MPa, 30 MPa, 200KPa, 25kN/m³, 15kN/m³ and 1meter for f_y , f'_c , Q_a , γ_c , γ_s and D_f respectively. In order to verify the design results made by the analytical method a comparison of footing designed by the analytical method with the software STAAD Foundation is presented in Table I [10].

Table II shows the total cost of different footing areas due to different axial loads and allowable soil bearing pressure Q_a . As an example, an axial load of 1500kN and allowable soil pressure of 200kN/m² will require a footing cost \$1457 and \$1505 in Qatar and USA prices respectively, Fig. 6.

III. CONCLUSION

Footing optimum design analytical model is developed to estimate the cost of footing materials based on various design constraints. Total cost factor TCF, cost factor of concrete CFC, Cost Factor of steel CFS, and cost factor of timber CFT are developed and presented as formulas to approximate material cost estimation of optimized reinforced concrete footing based on ACI code of design. Cost factors were used to produce footing cost charts that relate the required footing area F_{Adu} to axial load, soil bearing pressure, and other design parameters to the slab material cost. The model is flexible and could be used for other codes of design by modifying equations of shear, flexural and optimization to check cost estimates for isolated footings.

REFERENCES

- [1] American Concrete Institute (ACI). (2008). "Building Code and Commentary". ACI-318M-08, Detroit.
- [2] McCormac, and Brown. (2009). Design of Reinforced Concrete, Wiley, 8th edition, New Jersey.
- [3] Hassoun, and Al-Manaseer. (2011). Structural Concrete Theory and Design, Wiley, 5th edition, New Jersey.
- [4] Wang, Yu, and Kulhawy, F. (2008). "Economic Design Optimization of Foundation", *Journal of Geotechnical and geoenvironmental*, ASCE, pp.1097-1105.
- [5] Hans, G. (1985). "Flexural Limit Design of Column Footing", *Journal of Structural Engineering*, ASCE, pp.2273-2287.
- [6] Jiang, D. (1983). "Flexural Strength of Square Spread Footing", *Journal of Structural Engineering*, ASCE, pp.1812-1819.
- [7] Wang, Yu. (2008). "Reliability-Based Economic Design Optimization of Spread Foundation", *Journal of Geotechnical and Geoenvironmental*, ASCE, pp.1097-1105.
- [8] MATHCAD (2007). MathSoft Inc., 101 Main Street, Cambridge, Massachusetts, 02142, USA.
- [9] Kohli, J. (1968). "Optimum Design of Concrete Spread Footing by Computer", *Structural Journal*, ACI, pp.384-389.
- [10] Waier, P.R., (2010). RSMEANS-Building Construction Cost Data, 68TH Annual Edition, RSMeans, MA 02364-3008, USA.