

Noise Level Investigation in Printing Industry in Novi Sad, Serbia

Grujić S., Mihailović A., Kiurski J., Adamović S. and Adamović D

Abstract—The aim of this study was to determine noise level of six different types of machines in printing companies in Novi Sad. The A-weighted levels on L_{eq} , L_{max} and L_{min} Sound Pressure Level (SPL) in dBA were measured. It was found that the folders, offset printing presses and binding machines are the predominant noise sources. The noise levels produced by 12 of 38 machines exceed the limiting threshold level of 85 dBA, tolerated by law. Since it was determined that the average noise level for folders (87.7 dB) exceeds the permitted value the octave analysis of noise was performed.

Keywords— noise levels, octave analysis, printing machines.

I. INTRODUCTION

OCCUPATIONAL exposure to excessive noise is commonly encountered in a great variety of industrial processes.

Printing industry is the source of heavy industrial noise. The mechanism of noise generation depends on the particular noise operations and equipment including: electromechanical devices, pumps, compressors, cutters, presses, etc. [1].

Noise occurs during printing, binding, folding, cutting and perforating processes. Results of many studies indicate that the workers in printing industry may be at risk of occupational hearing loss [2]. There is causal relationship between workplace noise and hearing loss and the other health problems of the workers [3]. Non-auditory effects of noise may also include lack of concentration, irritation, fatigue, headache, sleep disturbance, depression, increased breathing rate, social isolation and greater risk of accidents [4,5]. Noise may contribute to cardiovascular disorders such as faster pulse rate, coronary heart disease and hypertension [6,7]. The manifestation progress and the degree of occupational hearing impairment depend on several factors: sound intensity, duration

S. Grujić is with the Faculty of Technical Sciences, Department for Fundamental Disciplines, Trg Dositeja Obradovića 6, Novi Sad, Serbia (phone: +381 21 4852279; e-mail: selena@uns.ac.rs).

A. Mihailović is with the Faculty of Technical Sciences, Department for Fundamental Disciplines, Trg Dositeja Obradovića 6, Novi Sad, Serbia (phone: +381 21 4852279; e-mail: zandra@uns.ac.rs).

J. Kiurski is with the Faculty of Technical Sciences, Department of Graphic Engineering and Design, Trg Dositeja Obradovića 6, Novi Sad, Serbia (phone: +381 21 4852623; fax: +381 21 455672; e-mail: kiurski@uns.ac.rs).

S. Adamović is with the Faculty of Technical Sciences, Department of Graphic Engineering and Design, Trg Dositeja Obradovića 6, Novi Sad, Serbia (phone: +381 21 4852623; e-mail: adamovicsavka@uns.ac.rs).

D. Adamović is with the Faculty of Technical Sciences, Department of Environmental Engineering and Occupational Safety and Health, Trg Dositeja Obradovića 6, Novi Sad, Serbia (phone: +381214852197; e-mail: adam@uns.ac.rs).

of exposure, frequency of interfering sound, age, physical conditions of workers and individual sensitivity as well as concomitant harmful occupational factors such as vibrations and ototoxic agents [8]. Internationally accepted noise level which does not cause temporary or permanent hearing loss is 75 dBA. However, sound levels of 85 dBA and above, for duration of 8 hours per day cause damage to the hearing after many years [9].

II. METHODS

The noise level of six different types of machines: digital color presses, offset printing presses, cutters, folders, binding machines and paper perforating machines was measured using TES-1358A Sound Level Meter (SLM), with RS-232 Interface. The A-weighted levels on L_{eq} , L_{max} and L_{min} SPL in dBA were collected. For conducting the noise survey, Serbian guidelines for noise measuring were followed [10]. The desired response of SLM was set at “fast”. The noise levels were measured about 1.5 m above the floor and the measurements were taken over a period of 10 s for paper cutting machines and 30 s for other types of machines. At the end of experiment, the data were downloaded to a personal computer and, with the help of utility software, the equivalent SPL and noise spectrum at each reading were obtained.

III. RESULTS AND DISCUSSION

Noise measurements were conducted for 5 digital colour presses, 11 offset printing machines, 5 folders, 6 cutters, 5 binding machines and 6 paper perforating machines.

The average levels with their standard deviations are given in Table 1. The measured L_{eq} values for all machines generally varied between 70-88 dBA. The highest L_{eq} levels were obtained for folders with the mean value of 87.7 (3.1) dBA. The noise levels produced by 12 of 38 machines exceed the limiting threshold level of 85 dBA, tolerated by law. The levels on L_{eq} , L_{max} and L_{min} SPL in dBA of surveyed machines are graphically shown in Fig. 1. As it can be seen the lowest were L_{eq} levels of digital colour presses with the mean value of 70.7 (4.2) dBA. The offset printing presses produce greater noise levels when the compressors are switched on (the interrupted lines in Fig. 1). It can be noticed that the great range of noise levels (75.2-94.8) dBA and the high variance (6.87) were obtained for the cutters, which is due to the different type of cutting material used.

Since it was determined that the average noise level for folders exceeds the permitted value given by Serbian guidelines [10] the octave analysis of noise was performed.

TABLE I
 NOISE LEVELS OF L_{eq} , L_{max} AND L_{min} (IN dBA) WITH AVERAGE LEVELS AND VARIANCES OF THE DIFFERENT TYPES OF MACHINES

Type of machine	L (dBA) (SD)		
	L_{min}	L_{max}	L_{eq}
Digital printing presses	67.5 (4.5)	74.3 (4.3)	70.7 (4.2)
Offset printing presses	78.4 (5.6)	86.0 (3.3)	82.7 (3.9)
Cutters	71.1 (7.8)	90.8 (4.8)	80.2 (6.9)
Folders	81.2 (2.9)	92.4 (7.2)	87.7 (3.1)
Binding machines	80.2 (2.3)	85.6 (3.1)	82.4 (2.5)
Paper perforating	76.7 (5.9)	88.9 (3.5)	81.3 (3.2)

The dBA averages of L_{eq} at 1/1 octave bands for folders in comparison with NR-80 curve at 1/1 octave bands as a histogram, is presented in Fig. 2. The noise rating - NR - curves are developed by International Organisation for Standardization (ISO) to determine the acceptable indoor environment for hearing preservation, speech communication and annoyance. The Noise Rating level for industrial noise should not exceed the levels of NR-80 curve.

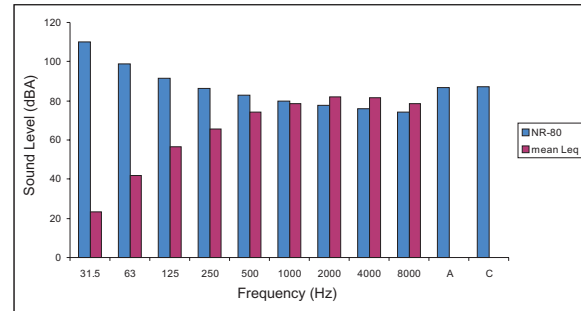


Fig. 2 Averages of L_{eq} in dBA at 1/1 octave bands for folders in comparison with NR-80 curve

The present investigation of surveyed printing companies showed that most of the facilities are not located in workspace standardized to adequate acoustic criteria and the workers do not wear hearing protectors. Hearing protectors should be used when engineering controls and work practices are not feasible to reduce noise exposure to safe levels. Earmuffs, ear plugs and ear canal caps are the main types of hearing protectors [11].

Based on the previous analysis, the following recommendations which could be considered to decrease the noise level in the workplace are [12]:

- 1) noise reduction techniques such as engine modifications and modifications of a workroom with sound absorbent materials
- 2) hearing protection of the employees.

It can be concluded that the workers in printing companies should have periodic audiometric tests to check the effectiveness of the noise control and hearing conservation program.

ACKNOWLEDGMENT

The authors acknowledge the financial support of the Ministry of Science and Technological Development of the Republic of Serbia, within the Project No. 34014 and III 43002.

REFERENCES

- [1] O. M. P. Norton, "Fundamentals of noise and vibrations analysis for engineers", Cambridge University Press, Cambridge, 1994.
- [2] D. I. Nelson, Y. Robert, R. Y. Nelson, M. D. Concha-Barrientos, and M. Fingerhut, "The global burden of occupational noise-induced hearing loss", American Journal of Industrial Medicine., 2005, Vol. 48, No.6, pp. 446-458.
- [3] P. Rabinowitz, T. Rees, "Occupational hearing loss". In: Rosenstock, L., Cullen, M., Brodtkin, C., Redlich, C. (Eds.), "Textbook of clinical occupational and environmental medicine". Second Edition. (pp. 426-362). Philadelphia, USA: Elsevier Saunders, 2005.
- [4] Dobbie, R. A. (2002). Noise. In Wald, P. H., Stave, G. (Eds.), Physical and Biological Hazards of the Workplace. Second Edition. (pp. 279-290). New York: John Wiley & Sons, Inc.
- [5] Stansfeld, S. A., Matheson, M. P. (2003). Noise pollution: non-auditory effects on health, British Medical Bulletin, 68(1), 243-257
- [6] Tomei, F., Fantini, S., Tomao, E., Baccolo, T. P., Rosati, M.V. (2000). Hypertension and chronic exposure to noise. Archives of Environmental Health, 55(5), 319-325
- [7] Virkkunen, H., Kauppinen, T., Tenkanen, I. (2005). Long-term effect of occupational noise on the risk of coronary heart disease. Scandinavian Journal of Work, Environment & Health, 31(4), 291-299.

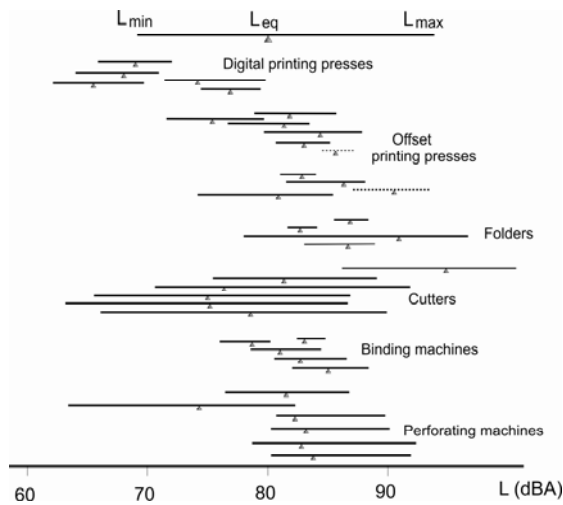


Fig. 1 Noise levels: L_{eq} , L_{min} and L_{max} (in dBA) of different types of the machines

It was found that the means of L_{eq} levels for folders were considerably greater than the permissible at higher frequencies (2kHz and above). It is important to note that hearing damage from excessive noise usually occurs at high frequencies (3, 4, 6 kHz) and then spreads to lower frequencies (0.5, 1, 2 kHz) [8].

- [8] P. Gidikova, G. Prakova, P. Ruev, and G. Sandeva, "Hearing impairment among workers occupationally exposed to excessive levels of noise", *Central European Journal of Medicine*, 2007, Vol. 2, No.3, pp. 313-318.
- [9] I-INCE International Institute of Noise Control Engineering (Ed.) "Final report, technical assessment of upper limits on noise in the workplace". I-INCE Publication 97-1. *Noise/News International*, 203-216. (1997). Retrieved from: <http://www.i-ince.org/data/iince971.pdf>.
- [10] RANLWE (Regulations of allowed noise level in working environment). (1992). "Official Gazette of the SFRJ", No 21/92 310-316.
- [11] Niland J. (1994). Occupational hearing loss, noise, and hearing conservation. In : Zenz C., Dickerson O., Horvarth E., (Eds.), *Occupational medicine*. Third Edition. (pp. 258-296). St Louis Missouri: Mosby Publication
- [12] A. Mihailovic, S. Grujic, J. Kiurski, J. Krstic, I. Oros, and I. Kovacevic, "Occupational noise in printing companies", *Environmental Monitoring and Assessment*, 2010, EMAS5885.1, DOI: 10.1007/s10661-010-1817-5.