Extensions to wireless DetNet

Carlos J. Bernardos (UC3M)
Alain Mourad (InterDigital)

OUTLINE

- Introduction

- Exemplary use case: wireless for industrial applications

- IETF DetNet/RAW: wireless DetNet

- RAW Challenges Ahead
    1. Multi-domain extension
    2. RAW and MEC integration
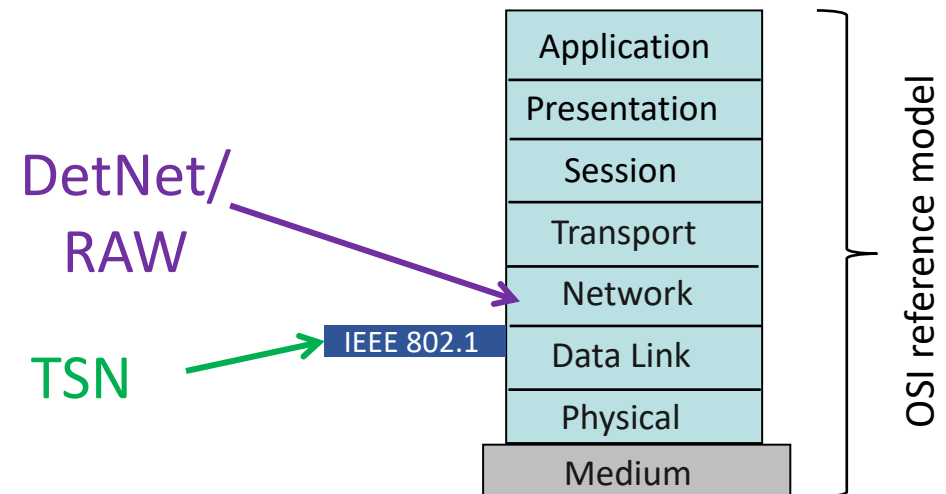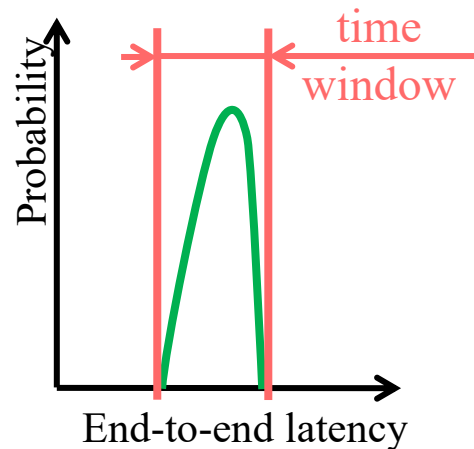   3. Mobility in RAW
- Conclusions

OUTLINE

- Introduction

- Exemplary use case: wireless for industrial applications

- IETF DetNet/RAW: wireless DetNet

- RAW Challenges Ahead
  1. Multi-domain extension
  2. RAW and MEC integration
  3. Mobility in RAW

- Conclusions

DETERMINISTIC COMMUNICATIONS

- The Right Packet at The Right Time
  - Deterministic data packet delivery
  - Packet delivery within a time window without loss or delay due to congestion or errors

- IEEE 802.1 Time-Sensitive Networking (TSN) at Layer 2 (bridging)

- IETF Deterministic Networking (DetNet) at Layer 3 (IP/MPLS routing)

4

IETF DetNet WG

The Deterministic Networking (DetNet) Working Group focuses on deterministic data paths that operate over Layer 2 bridged and Layer 3 routed segments, where such paths can **provide bounds on latency, loss, and packet delay variation (jitter), and high reliability**. DetNet solutions **apply to both wireless and wired networks**. The Working Group addresses **Layer 3 aspects in support of applications requiring deterministic networking**. The Working Group collaborates with IEEE802.1 Time-Sensitive Networking (TSN), which is responsible for Layer 2 operations, to define a **common architecture for both Layer 2 and Layer 3**. Example applications for deterministic networks include professional and home audio/video, multimedia in transportation, engine control systems, and other general industrial and vehicular applications being considered by the IEEE 802.1 TSN Task Group.
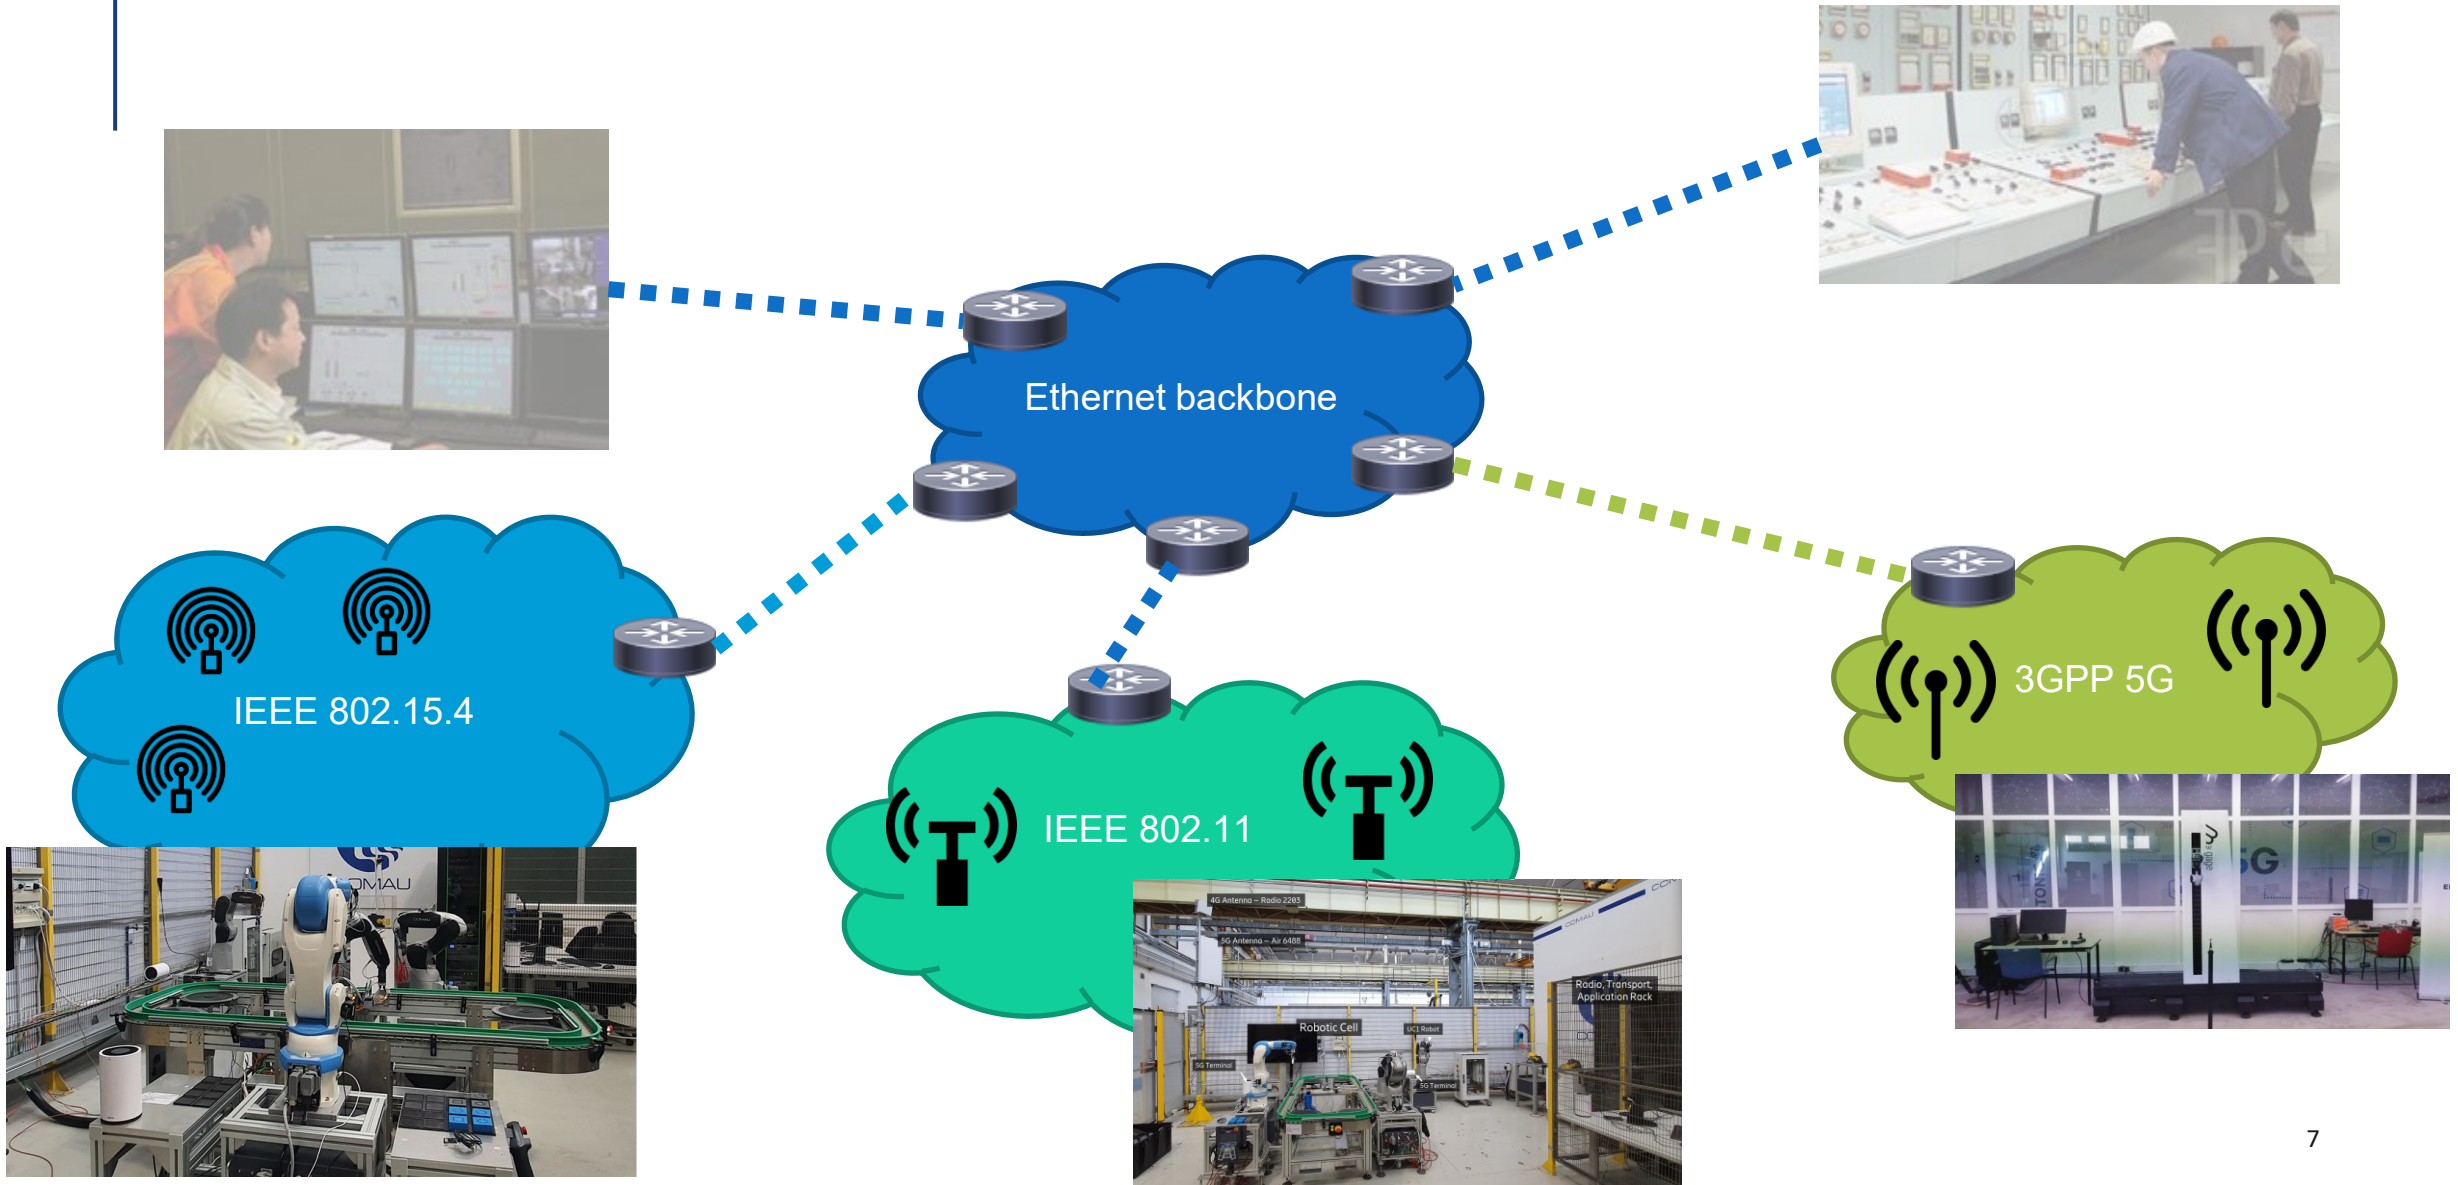
….

https://datatracker.ietf.org/wg/detnet/about

OUTLINE

- Introduction

- Exemplary use case: wireless for industrial applications

- IETF DetNet/RAW: wireless DetNet

- RAW Challenges Ahead
  1. Multi-domain extension
  2. RAW and MEC integration
  3. Mobility in RAW
- Conclusions

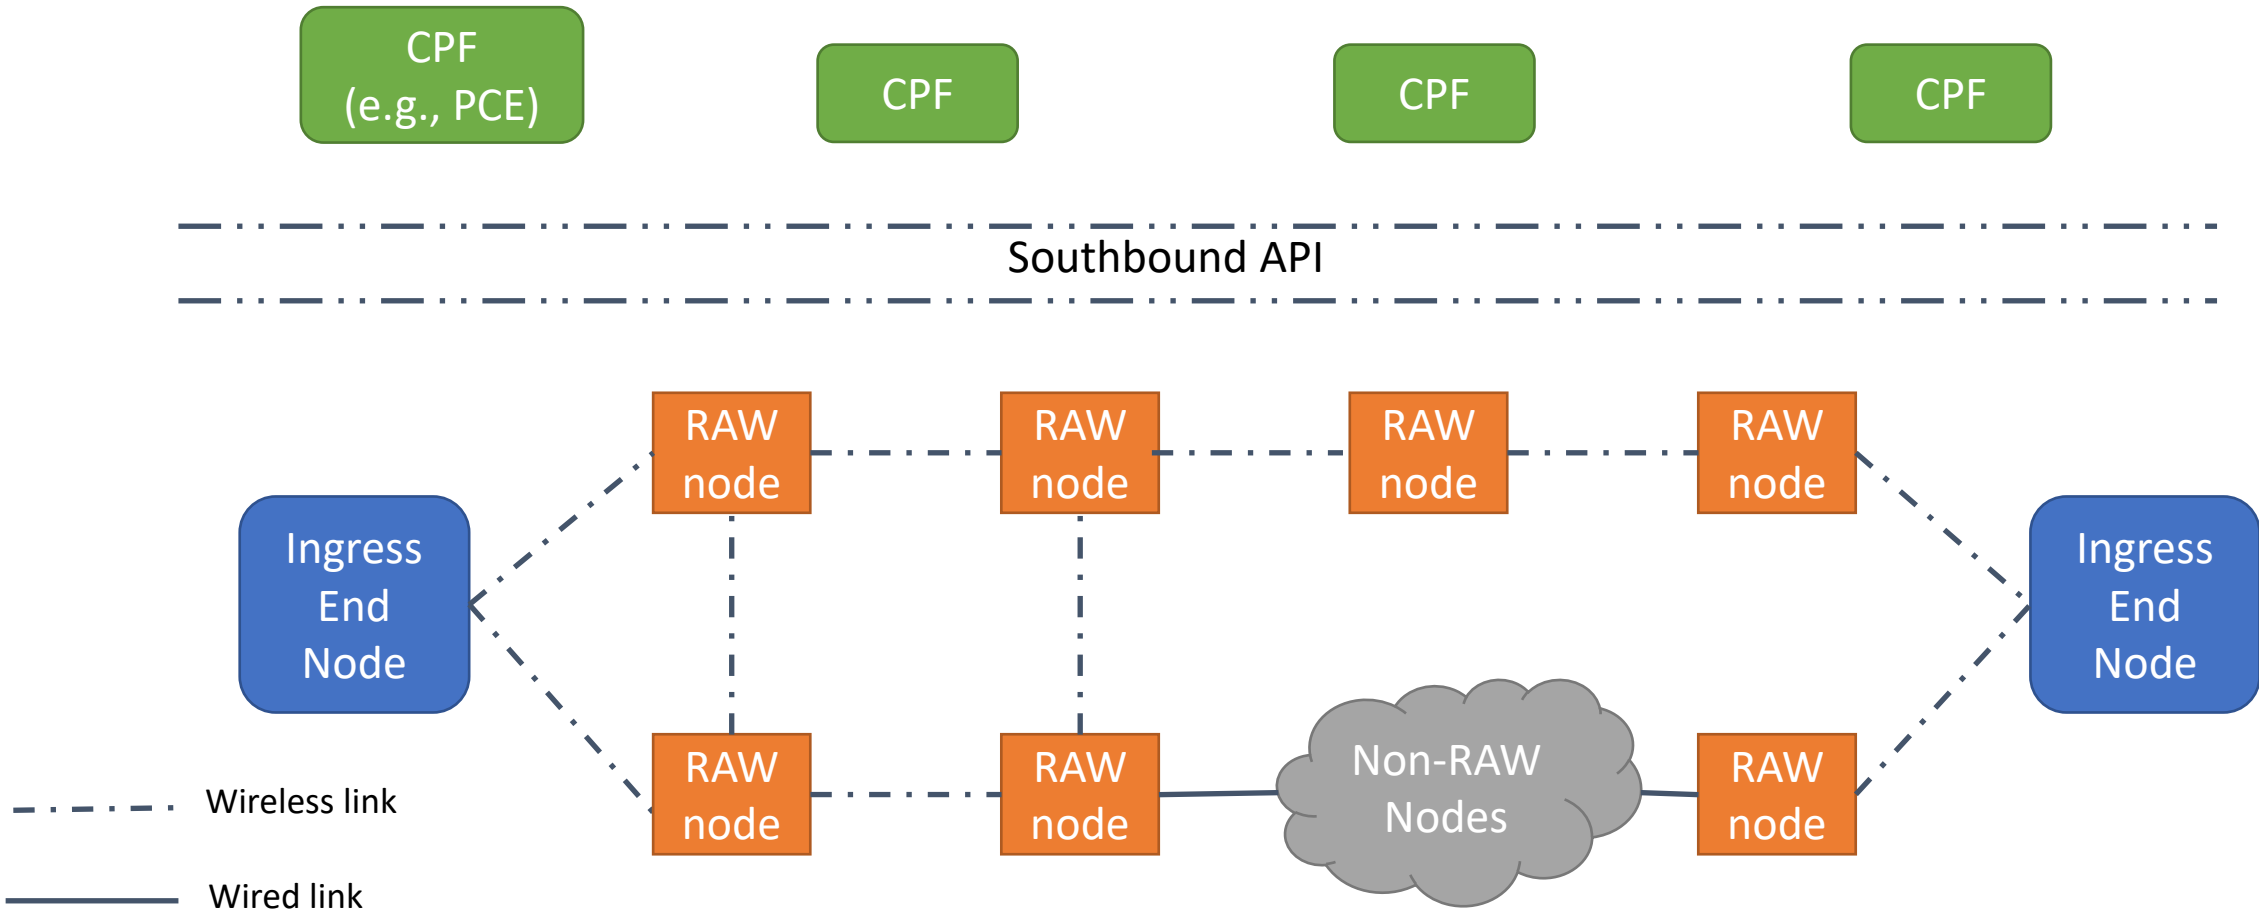# Exemplary use case: wireless for industrial applications

OUTLINE

- Introduction

- Exemplary use case: wireless for industrial applications

- **IETF DetNet/RAW: wireless DetNet**

- RAW Challenges Ahead
  1. Multi-domain extension
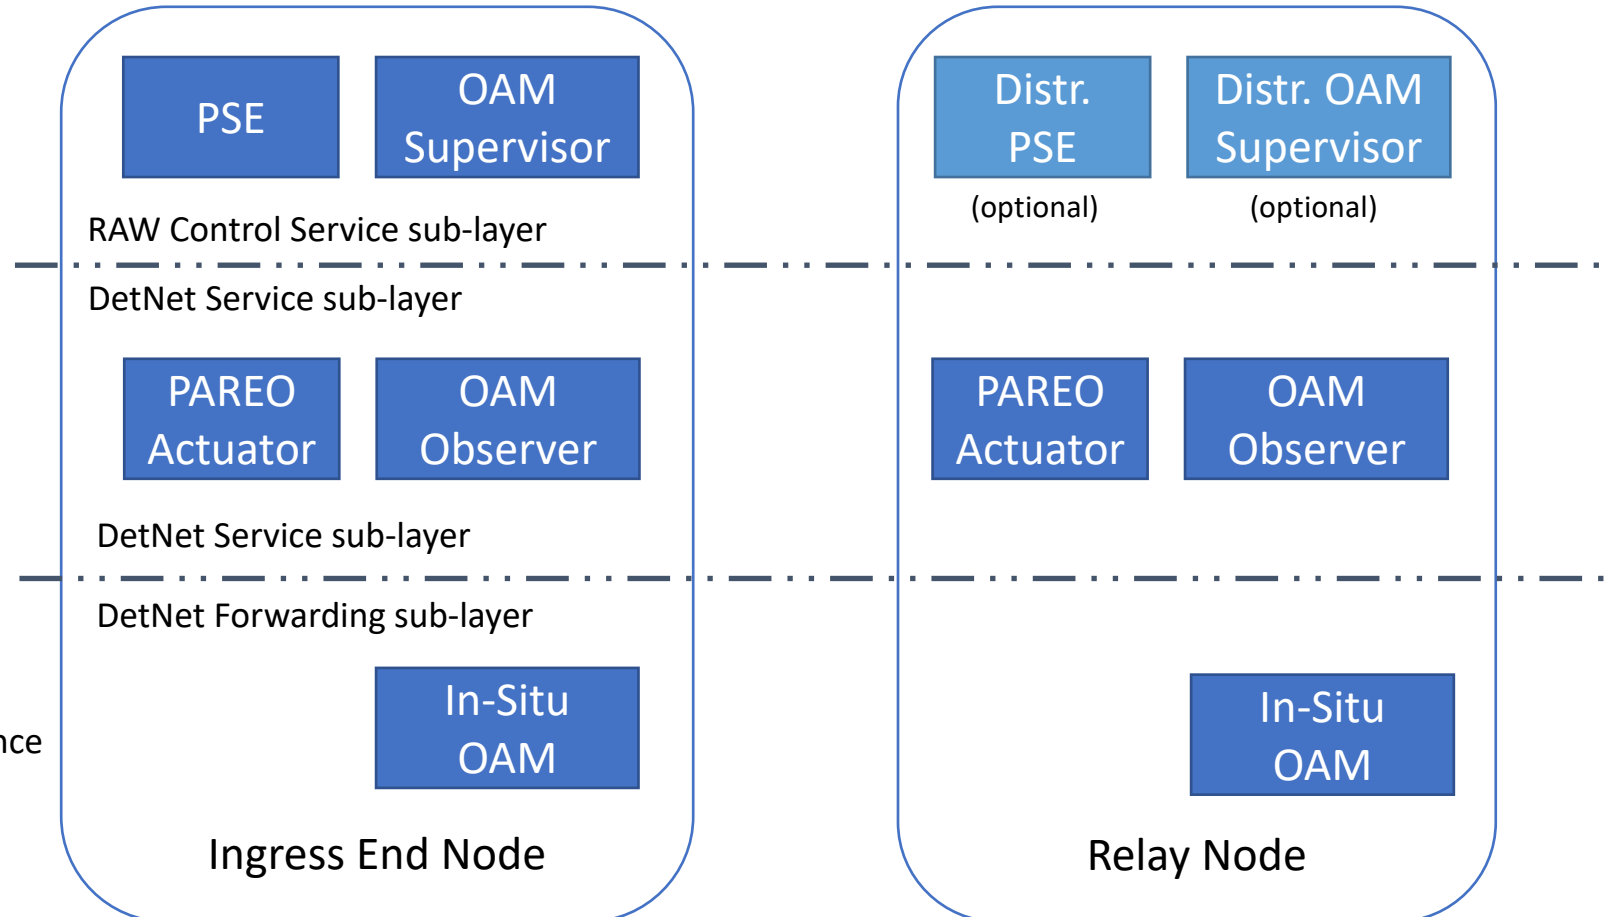 2. RAW and MEC integration
  3. Mobility in RAW

- Conclusions

RAW architecture: conceptual model

CPF: Control Plane Function
PCE: Path Computation Element

draft-ietf-raw-architecture-11

RAW architecture: RAW and DetNet

Ingress End Node

| PSE | OAM Supervisor |

RAW Control Service sub-layer

- -

DetNet Service sub-layer

| PAREO Actuator | OAM Observer |

DetNet Service sub-layer

- -

DetNet Forwarding sub-layer

| In-Situ OAM |

Relay Node

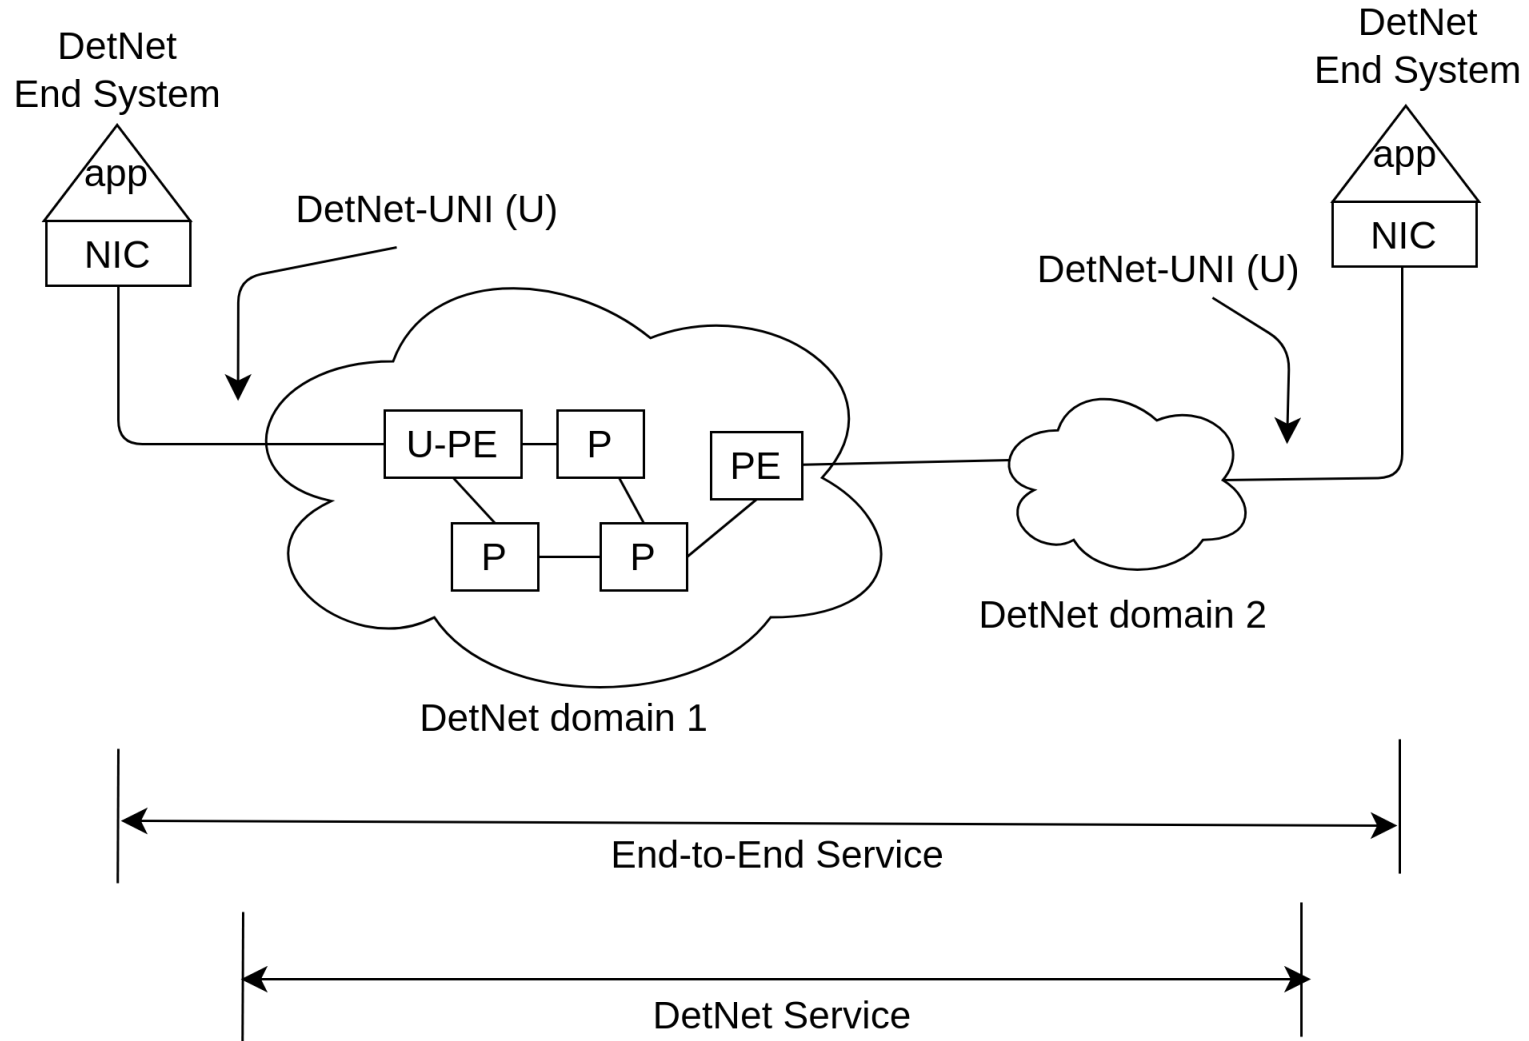| Distr. PSE (optional) | Distr. OAM Supervisor (optional) |

| PAREO Actuator | OAM Observer |

| In-Situ OAM |

PSE: Path Selection Engine
OAM: Operations, Administration and Maintenance
PAREO: Packet (hybrid) ARQ, Replication, Elimination and Ordering
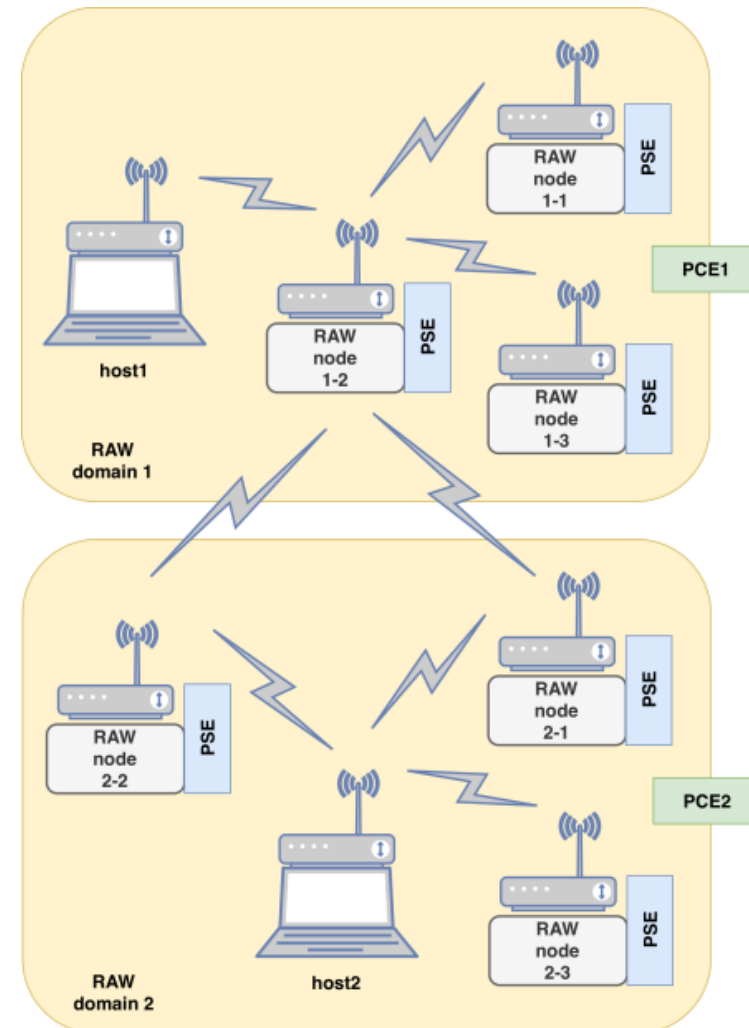
draft-ietf-raw-architecture-11

uc3m

10

OUTLINE

- Introduction

- Exemplary use case: wireless for industrial applications

- IETF DetNet/RAW: wireless DetNet

- RAW Challenges Ahead
  1. Multi-domain extension
  2. RAW and MEC integration
  3. Mobility in RAW
- Conclusions

DetNet Service Reference Model (Multidomain)

DetNet End System

app

NIC

DetNet-UNI (U)

DetNet End System

app

NIC

DetNet-UNI (U)

U-PE P

PE

P P

DetNet domain 1

DetNet domain 2

End-to-End Service

DetNet Service

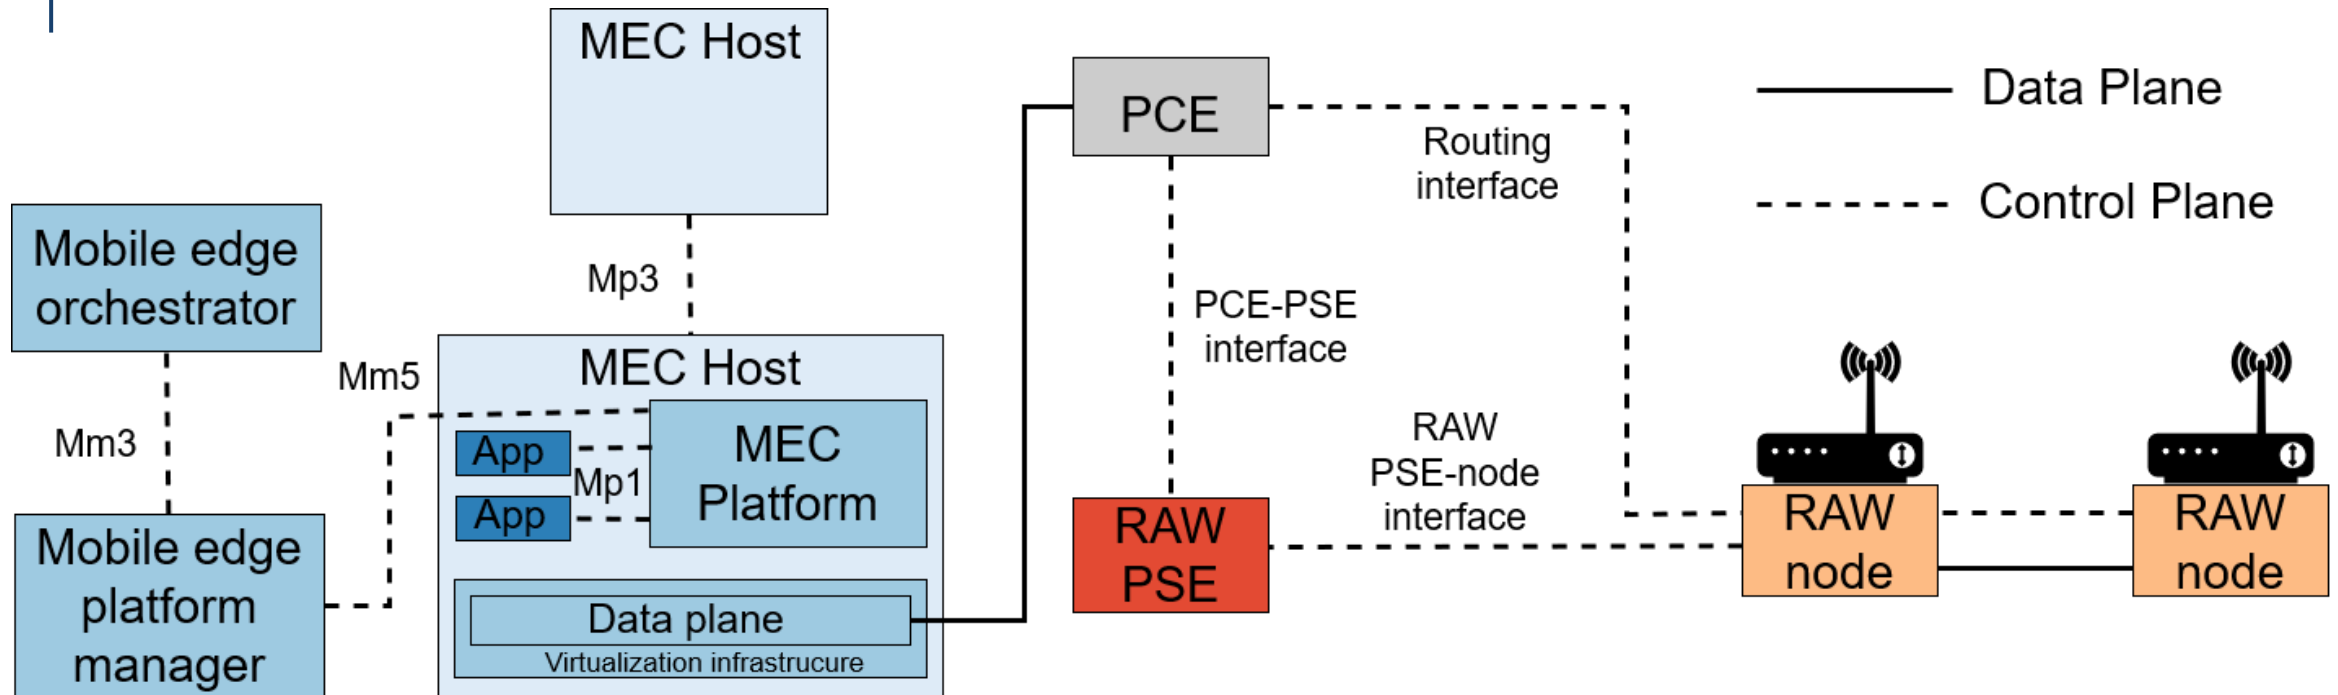# Scenario showing multiple RAW domains

- PSE of one domain can not act on the other domains (e.g., no multi-domain OAM solutions yet)

- Running uncoordinatedly RAW solutions in each domain is not an effective solution.

- PSEs need to have global E2E information as well as be capable of running OAM mechanism to monitor the quality of the selected multi-domain paths.
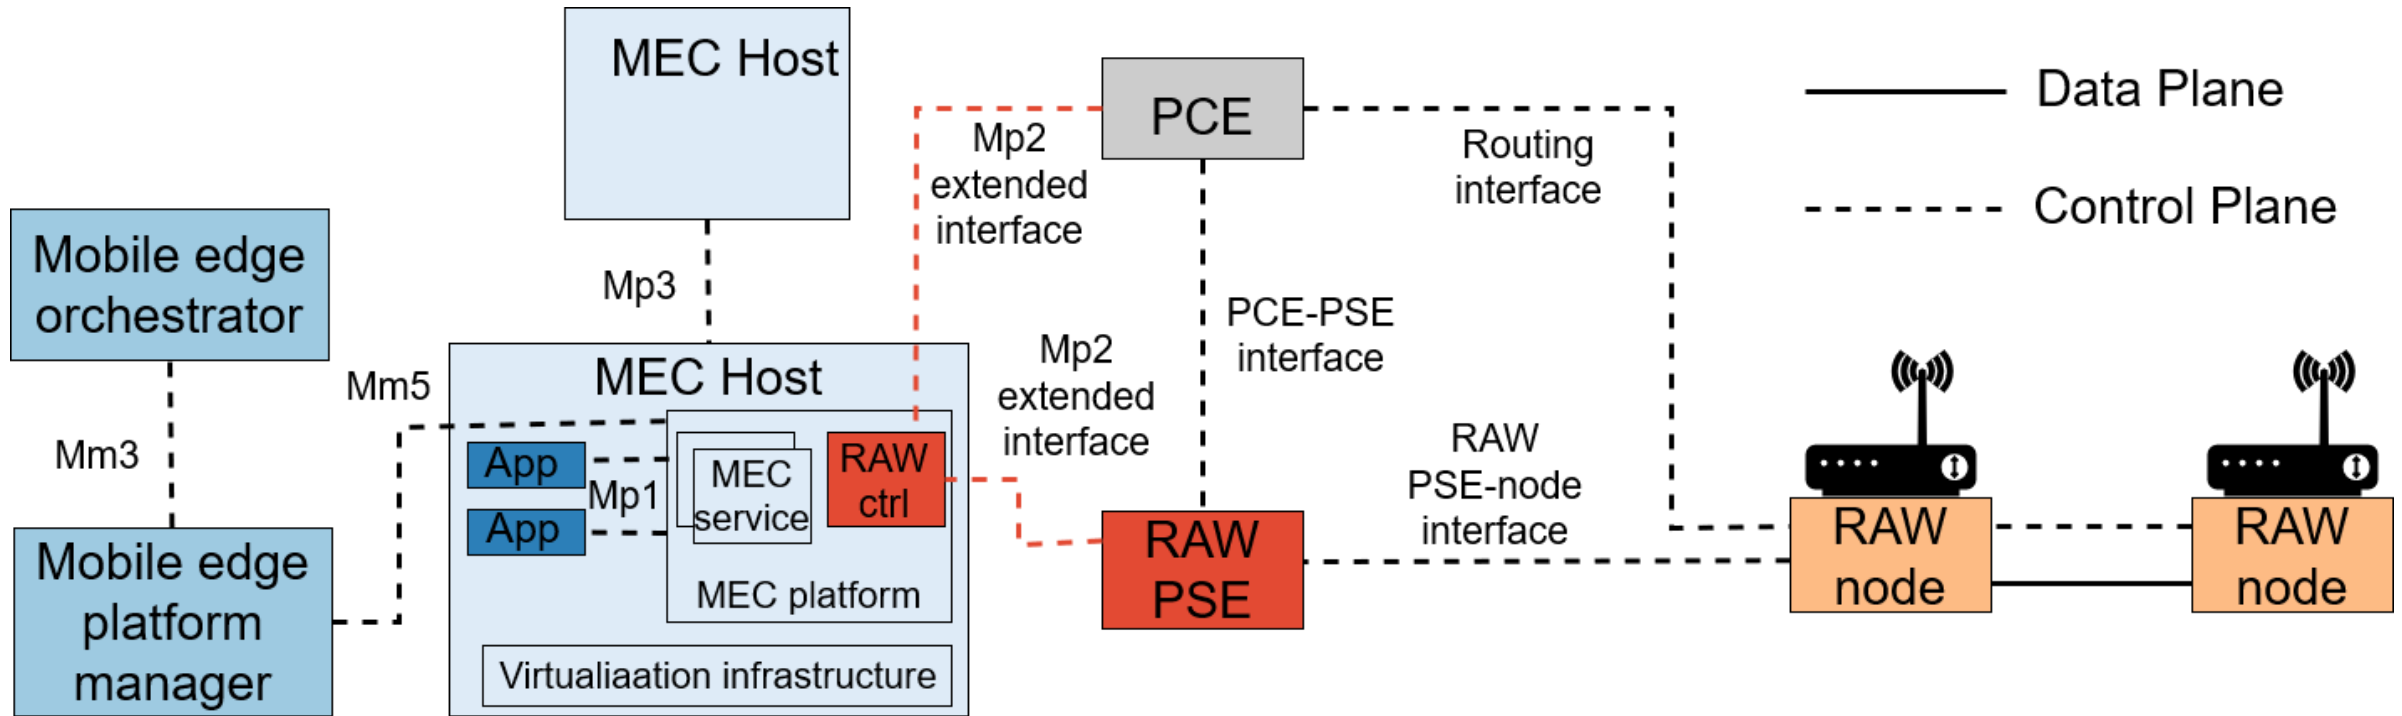
OUTLINE

- Introduction

- Exemplary use case: wireless for industrial applications

- IETF DetNet/RAW: wireless DetNet

- RAW Challenges Ahead
  1. Multi-domain extension
  2. RAW and MEC integration
  3. Mobility in RAW

- Conclusions

RAW in Multi-Access Edge Deployments

In the MEC reference architecture the Virtualisation infrastructure in the MEC host includes a **data plane that executes the traffic rules** received by the MEC platform, and routes the traffic among applications, services, DNS server/proxy, 3GPP network, **local networks and external networks**

RAW and MEC integration

The Mp2 reference point between the MEC platform and the data plane of the Virtualisation infrastructure is used to instruct the data plane on how to route traffic among applications, networks, services, etc. **This reference point is not further specified by ETSI MEC**

OUTLINE

- Introduction

- Exemplary use case: wireless for industrial applications

- IETF DetNet/RAW: wireless DetNet

- RAW Challenges Ahead
  1. Multi-domain extension
  2. RAW and MEC integration
  3. Mobility in RAW

- Conclusions

Mobility in RAW Scenarios

Exiting challenges

- As opposed to static scenarios, where possible "tracks" do not change due to mobility, mobility scenarios pose additional complexity

- Current solutions DetNet and RAW solutions are limited to static scenarios

- Control plane solutions need to cope with mobility by proactively preparing the network for change of point of attachment of the mobile node. And the impact that this has in terms of new tracks used for the traffic

Way forward

- Inter-PSE coordination will be needed

- Mechanisms that will allow for a terminal to signal an imminent handover and convey its QoS requirements

- The signaling messages among RAW nodes (PSEs) need to be specified to prepare and coordinate an imminent handover

OUTLINE

- Introduction

- Exemplary use case: wireless for industrial applications

- IETF DetNet/RAW: wireless DetNet

- RAW Challenges Ahead
  1. Multi-domain extension
  2. RAW and MEC integration
  3. Mobility in RAW

- Conclusions

CONCLUSIONS

- Significant contributions made (some adopted) to IETF: **Adopted by the IETF**

  - RFC 9450: Reliable and Available Wireless (RAW) Use Cases, https://www.rfc-editor.org/rfc/rfc9450.txt, January 2024
  - RFC 9551: Framework of Operations, Administration, and Maintenance (OAM) for Deterministic Networking (DetNet), https://www.rfc-editor.org/rfc/rfc9551.txt, March 2024
  - draft-ietf-detnet-controller-plane-framework: Deterministic Networking (DetNet) Controller Plane Framework, https://www.ietf.org/archive/id/draft-ietf-detnet-controller-plane-framework-05.txt, September 2023
  - draft-ietf-detnet-raw-industrial-req: Requirements for Reliable Wireless Industrial Services, https://www.ietf.org/archive/id/draft-ietf-detnet-raw-industrial-req-00.txt, January 2024

  - draft-bernardos-detnet-raw-multidomain: RAW multidomain extensions, https://www.ietf.org/archive/id/draft-bernardos-detnet-raw-multidomain-00.txt, April 2024
  - draft-bernardos-detnet-raw-mobility: MIPv6 RAW mobility, https://www.ietf.org/archive/id/draft-bernardos-detnet-raw-mobility-01.txt, April 2024
  - draft-bernardos-detnet-raw-multidomain: RAW multidomain extensions, https://www.ietf.org/archive/id/draft-bernardos-detnet-raw-multidomain-00.txt, April 2024
  - draft-bernardos-detnet-raw-mec: Extensions to enable wireless reliability and availability in multi-access edge deployments, https://www.ietf.org/archive/id/draft-bernardos-detnet-raw-mec-01.txt, April 2024

Acknowledgements

PREDICT-6G HE project

6G-DATADRIVEN Project
(only for Carlos J. Bernardos)