

# Effective Design Factors for Bicycle-Friendly Streets

Z. Asadi-Shekari, M. Moeinaddini, M. Zaly Shah, A. Hamzah

**Abstract**—Bicycle Level of Service (BLOS) is a measure for evaluating street conditions for cyclists. Currently, various methods are proposed for BLOS. These analytical methods however have some drawbacks: they usually assume cyclists as users that can share street facilities with motorized vehicles, it is not easy to link them to design process and they are not easy to follow. In addition, they only support a narrow range of cycling facilities and may not be applicable for all situations. Along this, the current paper introduces various effective design factors for bicycle-friendly streets. This study considers cyclists as users of streets who have special needs and facilities. Therefore, the key factors that influence BLOS based on different cycling facilities that are proposed by developed guidelines and literature are identified. The combination of these factors presents a complete set of effective design factors for bicycle-friendly streets. In addition, the weight of each factor in existing BLOS models is estimated and these effective factors are ranked based on these weights. These factors and their weights can be used in further studies to propose special bicycle-friendly street design model.

**Keywords**—Bicycle level of service, bicycle-friendly streets, cycling facilities, rating system, urban streets.

## I. INTRODUCTION

THE growing concern over environmental, economic and social problems that motorized vehicles produce, have made transportation planners and engineers to investigate solutions to promote green travel modes. Cycling is one of the most sustainable travel options that can reduce congestion and pollutions that are produced by automobiles [1] but it should have its own infrastructure such as bike lane, shelter facilities and separate path. Although there are different research and guidelines that try to consider non-motorized users, the results in communities are not sufficient to satisfy all people. NHTSA and BTS [2] found that adequate facilities such as bike lanes can be used by approximately just 5% of bike trips. Accordingly, necessary adjustments need to be made and demanding requirements should be provided to make streets convenient and safe for non-motorized users [3]-[13].

Designing is a complex process which needs tools and methods to assist, evaluate and improve the design. The application of analytical methods in street design and evaluation has always been a challenging task. Thus, it is

important to represent a reliable method to assess streets for non-motorized users [3]. To improve street conditions for pedestrians and cyclists, it is necessary to evaluate existing walking and cycling facilities and find problems and failures. Streets evaluation has been done by level of service (LOS) in many studies. An overall measure for describing existing conditions, facilities, infrastructure and furniture in street and also assessing quality of service can be defined as LOS [4]. Bicycle level of service (BLOS) is useful in many phases such as proposing strategies, designing, planning, prioritizing and monitoring. Most of planners such as [14]-[16] utilized BLOS for estimating the level of safety and comfort of streets for cyclists. Davis [17] introduced bicycle safety index rating (BSIR) which is one of the primary mathematical models that evaluates important factors for cyclists in streets. Davis [18] also eliminated intersection evaluation from the BSIR model and validated roadway segment index (RSI) as the only method of bicycle suitability rating. Some variables and facilities that have influence on safety and comfort for bicyclists such as bike box, slope and marking were not considered in these models [4]. Sorton and Walsh [19] focused on the cyclists' facility design. The model has been criticized for leaving out important factors such as pavement and bike line conditions [20].

Bicycle compatibility index (BCI) is proposed by [21], [22] and developed by [23]. This model does not cover some effective variables such as lighting. Landis et al. [24] also introduced a measure for evaluating bicycle environment and facilities by considering several indicators that influence BLOS. Although Landis's model is an important model that is used by majority of guidelines, it does not consider some bicycle facilities and furniture such as signal and slope [4].

Most researchers have used direct observation and video techniques or questionnaire as data collection methods for their LOS models [4]. Usual analysis methods in street evaluations and LOS models are regression analysis (e.g., [21], [22], [24]), simulation (e.g., [25]) and point system (e.g., [15], [26]). The point system is not complex for designers to assess streets and it is easy to follow. This system can be extended and promoted by adding more indicators. It has also capability to be modified for different models.

What is most surprising about the current literature on evaluation bicycle condition is the lack of studies that consider cyclists as the significant street users with special needs and facilities [4]. The majority of previous studies assumed cyclists as users that can share street facilities with motorized vehicles. For instance, motorized and heavy motorized vehicles speed and volumes were important for ample studies (e.g., [19]-[22], [17], [24], [14]). However, there are some studies like [27] that conclude motor vehicle volume is not effective factor for BLOS. In addition, number of travel lanes

Z. Asadi-Shekari is with the Universiti Teknologi Malaysia under the Post-Doctoral Fellowship Scheme. Centre for Innovative Planning and Development (CIPD), Faculty of Built Environment, Universiti Teknologi Malaysia (e-mail: aszohreh2@live.utm.my).

M. Moeinaddini is with the Department of Urban and Regional Planning, Faculty of Built Environment, Universiti Teknologi Malaysia (corresponding author, phone: +60129410543, e-mail: mehdi@utm.my).

M. Zaly Shah is with the Department of Urban and Regional Planning, Faculty of Built Environment, Universiti Teknologi Malaysia (e-mail: zaly@outlook.com).

A. Hamzah is with the Centre for Innovative Planning and Development (CIPD) at Universiti Teknologi Malaysia (e-mail: merang@utm.my).

in previous studies such as [18] and [24] also show that motorized vehicles facilities were used as basic infrastructures for cyclists.

There are some studies like [18], [15], [24] and [28] that considered special facilities such as pavement condition for cycling. Dixon [15] also paid much attention to some effective conflict factors such as driveways, side streets and barrier free that can reduce the effects of motorized vehicles. These studies did not consider enough infrastructure and facilities to have safe, secure, comfort and convenience cycling trip in one model. Especially, share lane, unpaved trails and multiuse trails that are used by pedestrian and cyclists were not addressed before [4]. So, current evaluation tools only cover a narrow range of street conditions and may not be applicable for all situations. In addition, bicycle facilities can increase convenience and promote cycling trips. Therefore, to evaluate streets in this case, bicycle facilities and infrastructures are more critical. Consequently, the objectives of this paper are divided into different stages.

1. Identifying the key factors that influence BLOS based on different cycling facilities that are covered by developed guidelines and literature.
2. Presenting a complete set of effective design factors for bicycle-friendly streets.
3. Identifying the weight of each proposed factor based on existing BLOS models.
4. Introducing new objectives for further studies to propose special bicycle-friendly street design model.

## II. MATERIAL AND METHODS

In order to find design factors that have significant effects on BLOS developed guidelines and literature from different parts of the world were reviewed. Majority of guidelines for cycling in urban streets try to find needs of cyclists by utilizing scientific research and they present effective indicators with standards and descriptions based on their results. To have the majority of effective factors, the process of reviewing guidelines was continued until all indicators and standards repeated. Therefore, 23 developed guidelines from different parts of the world were reviewed in this research. This selection from various cities is useful for evaluating cycling indicators in different socio-economic contexts.

In the second step, current BLOS methods are reviewed to find the importance and weight of each factor in the existing models. Weight of each bicycle-friendly street factor can show the effectiveness of each factor. This weight is calculated by evaluating the importance of the factor for different BLOS models. When a factor is considered in several models, it means that this factor is needed to have better cycling conditions. Therefore, this factor is more effective and it may have higher weight. In addition, when a factor is more important, it has higher weight in the model. Therefore, a rating method and number of models that consider specific factors were applied to estimate the weight of each factor.

The factors in each study are ranked based on the importance of the factor for that study. These ranks are normalized by using the value of obtained rank per sum of

ranks in each study. The sum of these normalized values is used to proposed special weight for each factor. These factors and their weights can be used in further studies to propose special bicycle-friendly street design model.

## III. RESULT

Bicycle-friendly streets need design and construction of bicycle-friendly facilities. Different bicycle-friendly facilities have been proposed by various guidelines and literature to encourage people to use cycling as a transportation option. Bike route, signal, bike box, marking, slope, barrier and buffer, parking, trail crossing, pavement, grade, signage, lighting and traffic speed are effective design factors for bicycle-friendly streets that are identified by reviewing 23 developed guidelines from different parts of the world. Table I shows these factors and the references that are reviewed to identify them.

TABLE I  
 REFERENCES FOR DESIGN FACTORS REGARDING BICYCLE-FRIENDLY STREETS

F	References
1	r1, r2, r3, r4, r5, r6, r7, r9, r10, r11, r12, r13, r14, r15, r16, r17, r18, r19, r20, r21, r22, r23
2	r1, r11, r15, r19, r21, r22, r23
3	r8, r 11, r19, r23
4	r1, r3, r10, r11, r15, r18, r19, r20, r21, r22, r23
5	r19, r21
6	r9, r15, r18, r19, r20, r21, r22
7	r1, r2, r6, r7, r8, r10, r11, r13, r15, r16, r18, r19, r21, r23
8	r15, r18, r19
9	r1, r4, r6, r15, r16, r18, r19, r20, r21, r22, r23
10	r1, r19, r21
11	r1, r3, r4, r8, r9, r10, r11, r18, r19, r20, r21, r22, r23
12	r6, r11, r16, r17, r18, r19, r20, r21, r22, r23
13	r1, r3, r5, r6, r7, r9, r10, r11, r12, r13, r14, r15, r16, r17, r18, r19, r20, r21, r22, r23

References: r1- DELCAN [29], r2-City of Calgary [30], r3-Sutherland and Morrish [31], r4-City of Whittlesea [32], r5- Narrabrr Shir Council [33], r6-City of Charles Sturt [34], r7-Heramb [35], r8-Vanderslice [36], r9-Ashland City Council [37], r10- Access Minneapolis [38], r11-CDOT [39], r12- Pima County [40], r13-City of Aurora [41], r14-Burden [42], r15- UTIPEC [43], r16- City of NewYork [44], r17-RDM [45], r18- City of Tacoma [46], r19- Access Minneapolis [47], r20-Jakson et al. [48], r21-AASHTO [49], r22-Arup [50], r23-TBP [51]

F: 1-bike route, 2-signal, 3-bike box, 4-marking, 5-slope, 6-barriers and buffers, 7-parking, 8-trail crossing, 9-pavement, 10-grade, 11-signage, 12-lighting, 13-traffic speed

When a factor is suggested by several references, it means that this factor is more important for bicycle-friendly streets. In addition, when a factor is more important, there are more details and standards for this factor in the references. For instance, 22 from 23 references suggest standard bike routes such as shared lanes, paved shoulders, bike lanes, bike boulevards and shared use paths to have bicycle-friendly streets. There are complete details and standards for different types of bike routes in 10 references. The details and standards are semi complete for bike routes in 9 references and the rest just suggest to consider this facility in bicycle-friendly streets. Table II shows number of references regarding complete, semi complete and incomplete standards and details for each factor.

The identified factor can be included in the complete set of effective design factors for bicycle-friendly streets if at least one guideline suggests complete details and standards for that factor. Table III shows the complete set of effective design factors for bicycle-friendly streets and suggested references for their standards and details.

TABLE II  
 COMPLETE, SEMI COMPLETE AND INCOMPLETE STANDARDS AND DETAILS FOR EACH FACTOR

Standards and details	Factors												
	1	2	3	4	5	6	7	8	9	10	11	12	13
IC	3	2	1	5	0	2	5	1	4	1	6	3	5
SC	9	2	2	3	0	1	3	1	2	0	4	4	0
C	10	3	3	4	2	4	6	1	5	2	4	2	15

Factors: 1-bike route, 2-signal, 3-bike box, 4-marking, 5-slope, 6-barriers and buffers, 7-parking, 8-trail crossing, 9-pavement, 10-grade, 11-signage, 12-lighting, 13- traffic speed.

IC = incomplete, SC = semi complete, C = complete.

TABLE III  
 THE COMPLETE SET OF EFFECTIVE DESIGN FACTORS FOR BICYCLE-FRIENDLY STREETS AND STANDARDS' REFERENCES

Design factors	Standards' References
1	r1, r4, r5, r7, r9, r10, r11, ..., r23
2	r11, r19, r21, r22, r23
3	r8, r11, r13, r18, r19
4	r4, r10, r18, r19, r20, r21, r22
5	r19, r21
6	r9, r18, r19, r21, r22
7	r6, r7, r8, r15, r16, r18, r19, r21, r23
8	r18, r19
9	r15, r16, r18, r19, r21, r22, r23
10	r19, r21
11	r8, r15, r18, r19, r20, r21, r22, r23
12	r6, r11, r16, r17, r19, r21
13	r5, r6, r9, r10, r11, ..., r23

References: r1- DELCAN [29], r2-City of Calgary [30], r3-Sutherland and Morrish [31], r4-City of Whittlesea [32], r5- Narrabr Shir Council [33] , r6-City of Charles Sturt [34], r7-Heramb [35], r8-Vanderslice [36], r9-Ashland City Council [37], r10- Access Minneapolis [38], r11-CDOT [39], r12- Pima County [40], r13-City of Aurora [41], r14-Burden [42], r15- UTTIPEC [43], r16- City of NewYork [44], r17-RDM [45], r18- City of Tacoma [46], r19- Access Minneapolis [47], r20-Jakson et al. [48], r21-AASHTO [49], r22-Arup [50], r23-TBP [51].

Design factors: 1-bike route, 2-signal, 3-bike box, 4-marking, 5-slope, 6-barriers and buffers, 7-parking, 8-trail crossing, 9-pavement, 10-grade, 11-signage, 12- lighting, 13-traffic speed.

Among these factors some of them have more impacts on BLOS. In the next step, the importance and weight of each factor for existing BLOS models is estimated to find the weight of design factors for bicycle-friendly streets. Most of current BLOS models are reviewed in this step. The weights are estimated by evaluating the importance of the factor for current BLOS models. Therefore, the design factors that are considered by current BLOS models are ranked from the lowest to the highest for each model based on the importance of the factor for each study. The importance of the factors can be identified by the coefficients, emphasizes or points that are considered for factors in the models. The ranks are normalized for each study by using the value of obtained rank per sum of ranks in each study. Table IV shows ranks and normalized

ranks for the factors in the current BLOS models.

This complete set of effective design factors for bicycle-friendly streets and their weights can be used in further studies to propose special bicycle-friendly street design model. In addition, this complete set considers cyclists as users of streets who have special needs and facilities and includes a wide range of cycling facilities. Therefore, this complete set can be used to propose new practical measures for BLOS that cover the majority of facilities and infrastructures. Fig. 1 shows the strength of each factor for further special bicycle-friendly street design and evaluation models based on the proposed complete set of effective design factors. The weights of design factors show that bike route, traffic speed, pavement and barriers and buffers are the most effective design factors for bicycle-friendly streets (refer Fig. 1).

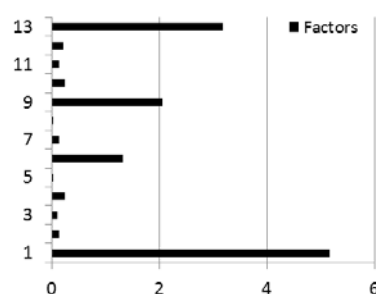


Fig. 1 The weight of each design factor. Factors: 1-bike route, 2-signal, 3-bike box, 4-marking, 5-slope, 6-barriers and buffers, 7-parking, 8-trail crossing, 9-pavement, 10-grade, 11-signage, 12-lighting, 13-traffic speed

#### IV. DISCUSSION AND CONCLUSIONS

Ample of previous studies consider BLOS based on the facilities that are designed for motorized vehicles, but cyclists like pedestrians and other special users need their own infrastructures. This research is of value since it provides a foundation for considering cyclists as significant street users with special facilities. In addition, considerable studies in BLOS have used complicated methods that are not applicable for designing and improvement process in different contexts and they only support a narrow range of cycling facilities. To overcome these shortcomings, this study tries to identify a wide range of cycling facilities based on various literature and developed guidelines. The final complete set of effective design factors for bicycle-friendly streets that is introduced in this study is a combination of universal factors that are proposed by developed guidelines. This complete set can be a foundation for bicycle-friendly streets design and evaluation models that are easy to follow and can be linked to the design process. Therefore, it is a comprehensive and easy to follow methodology to improve streets and guidelines which suits universal applications. Various cycling facilities are rated in this method so this model may also be used to prioritize financial resources. This method has the potential to be developed for other streets' users LOS based on similar process. This model can extend street guidelines towards complete streets by adding all users.

Furthermore, for model optimization, adding new local factors and guidelines may enhance BLOS and design models that are achieved by this method in case of localization. This method uses guidelines and current BLOS models to indicate

and prioritize the factors. Validity of these factors and their weights can be tested by other methods like relationship models in various contexts.

TABLE IV  
WEIGHTS OF DESIGN FACTORS FOR BICYCLE-FRIENDLY STREETS BASED ON CURRENT BLOS MODELS

BLOS Models		1	2	3	4	5	6	7	8	9	10	11	12	13	Sum
Mozer [14]	R	2.00					1.00							1.00	4.00
	NR	0.50					0.25							0.25	1.00
Dixon [15]	R	3.00					1.00			2.00				2.00	8.00
	NR	0.38					0.13			0.25				0.25	1.00
Landis [52]	R	2.00								1.00				1.00	4.00
	NR	0.50								0.25				0.25	1.00
Landis et al. [24]	R	3.00					1.00			4.00				2.00	10.00
	NR	0.30					0.10			0.40				0.20	1.00
Turner et al. [53]	R	1.00								1.00				1.00	3.00
	NR	0.33								0.33				0.33	1.00
Harkey et al. [21]	R	3.00					2.00							1.00	6.00
	NR	0.50					0.33							0.17	1.00
Noe'l et al. [28]	R	4.00					2.00			1.00	2.00			3.00	12.00
	NR	0.33					0.17			0.08	0.17			0.25	1.00
Petritsch et al. [54]	R	3.00								1.00				2.00	6.00
	NR	0.50								0.17				0.33	1.00
Jensen [16]	R	3.00					1.00							2.00	6.00
	NR	0.50					0.17							0.33	1.00
NCHRP [55]	R	3.00								1.00				2.00	6.00
	NR	0.50								0.17				0.33	1.00
Asadi-Shekari et al [7]	R	9.00	4.00	3.00	7.00	1.00	5.00		1.00	7.00	2.00		6.00	8.00	53.00
	NR	0.17	0.08	0.06	0.13	0.02	0.09		0.02	0.13	0.04		0.11	0.15	1.00
Asadi-Shekari [56]	R	10.00	4.00	3.00	7.00	1.00	5.00	9.00	1.00	7.00	2.00	8.00	6.00		63.00
	NR	0.16	0.06	0.05	0.11	0.02	0.08	0.14	0.02	0.11	0.03	0.13	0.10		1.00
FDOT [57]	R	3.00								1.00				2.00	6.00
	NR	0.50								0.17				0.33	1.00
Sum	R	49.00	8.00	6.00	14.00	2.00	18.00	9.00	2.00	26.00	6.00	8.00	12.00	27.00	187.00
	NR	5.17	0.14	0.10	0.24	0.03	1.32	0.14	0.03	2.06	0.24	0.13	0.21	3.18	13.00

1-bike route, 2-signal, 3-bike box, 4-marking, 5-slope, 6-barriers and buffers, 7-parking, 8-trail crossing, 9-pavement, 10-grade, 11-signage, 12-lighting, 13-traffic speed, R: rank, NR: normalized rank.

#### ACKNOWLEDGMENT

The authors wish to thank all of those who have supported this research for their useful comments during its completion. In particular, we would like to acknowledge the Universiti Teknologi Malaysia Research Management Centre (RMC) and Centre for Innovative Planning and Development (CIPD). The funding for this project is made possible through the research grant obtained from the Ministry of Education, Malaysia under the Fundamental Research Grant Scheme (FRGS) 2014 (FRGS grant no:R.J130000.7821.4F602).

#### REFERENCES

- [1] N. Cavill and A. Davis. *Cycling and Health: What's the Evidence?*. London: Cycling England, 2007.
- [2] NHTSA, BTS. "National Survey of Pedestrian and Bicyclist Attitudes and Behaviors." National Highway Traffic Safety Administration and Bureau of Transportation Statistics, 2003.
- [3] Z. Asadi-Shekari, M. Moeinaddini, and M. Zaly Shah. "Disabled Pedestrian Level of Service Method for Evaluating and Promoting Inclusive Walking Facilities on Urban Streets." *Journal of Transportation Engineering* 139, no. 2 (2013a): 181-92.
- [4] Z. Asadi-Shekari, M. Moeinaddini, and M. Zaly Shah. "Non-Motorised Level of Service: Addressing Challenges in Pedestrian and Bicycle Level of Service." *Transport Reviews* 33, no. 2 (2013b): 166-94.
- [5] Z. Asadi-Shekari, M. Moeinaddini, and M. Zaly Shah. "A Pedestrian Level of Service Method for Evaluating and Promoting Walking Facilities on Campus Streets." *Land Use Policy* 38, no. May (2014): 175-93.
- [6] Z. Asadi-Shekari, M. Zaly Shah. "Practical Evaluation Method for Pedestrian Level of Service in Urban Streets." In *International Transport Research Conference*. Penang, Malaysia, 2011.
- [7] Z. Asadi-Shekari, M. Moeinaddini, and M. Zaly Shah. "A Bicycle Safety Index for Evaluating Urban Street Facilities." *Traffic Injury Prevention* 16 (2015b): 283-88.
- [8] Z. Asadi-Shekari, M. Moeinaddini, and M. Zaly Shah. "Pedestrian Safety Index for Evaluating Street Facilities in Urban Areas." *Safety Science* 74 (2015a): 1-14.
- [9] M. Moeinaddini, Z. Asadi-Shekari, C. R. Ismail, and M. Zaly Shah. "A Practical Method for Evaluating Parking Area Level of Service." *Land Use Policy* 33 (2013): 1-10.
- [10] M. Moeinaddini, Z. Asadi-Shekari, Z. Sultan, and M. Zaly Shah. "Analyzing the Relationships between the Number of Deaths in Road Accidents and the Work Travel Mode Choice at the City Level." *Safety Science* 72 (2015a): 249-54.
- [11] M. Moeinaddini, Z. Asadi-Shekari, and M. Zaly Shah. "Analysing the Relationship between Park-and-Ride Facilities and Private Motorised Trips Indicators." *Arab J Sci Eng* 39 (2014a): 3481-88.

- [12] M. Moeinaddini, Z. Asadi-Shekari, and M. Zaly Shah. "The Relationship between Urban Street Networks and the Number of Transport Fatalities at the City Level." *Safety Science* 62 (2014b): 114–20.
- [13] M. Moeinaddini, Z. Asadi-Shekari, and M. Zaly Shah. "An Urban Mobility Index for Evaluating and Reducing Private Motorized Trips." *Measurement* 63 (2015b): 30–40.
- [14] D. Mozer. "Calculating Multi-Mode Levels-of-Service." *International Bicycle Fund*, 1994.
- [15] L. Dixon. "Bicycle and Pedestrian Level-of-Service Performance Measures and Standards for Congestion Management Systems." *Transportation Research Record* 1538 (1996): 1-9.
- [16] S. Jensen. "Pedestrian and Bicycle Level of Service on Road Way Segments." *Transportation Research Record* 2031 (2007): 43-51.
- [17] J. Davis. "Bicycle Safety Evaluation." Auburn University, City of Chattanooga, and Chattanooga-Hamilton County Regional Planning Commission, Chattanooga, Tenn, 1987.
- [18] J. Davis. "Bicycle Test Route Evaluation for Urban Road Conditions." In *Transportation Congress: Civil Engineers—Key to the World Infrastructure*. San Diego, CA: American Society of Civil Engineers, 1995.
- [19] A. Sorton and T. Walsh. "Bicycle Stress Level as a Tool to Evaluate Urban and Suburban Bicycle Compatibility." *Transportation Research Record* 1438 (1994): 17-24.
- [20] Cambridge Systematics. "Guidebook on Methods to Estimate Nonmotorized Travel." *Bicycle Federation of America*, and Michael Replogle. Cambridge MA, 1998.
- [21] D. L. Harkey, D. W. Reinfurt, and M. Knuiman. "Development of the Bicycle Compatibility Index." *Transportation Research Record* 1636 (1998a): 13-20.
- [22] D. L. Harkey, D. W. Reinfurt, M. Knuiman, and J. R. Stewart. "The Bicycle Compatibility Index: A Level of Service Concept." US: FHWA, Department of Transportation, 1998b.
- [23] I. Hallett, D. Luskin, and R. Machemehl. "Evaluation of on-Street Bicycle Facilities Added to Existing Roadways." Texas, Austin: Center for Transportation Research, The University of Texas at Austin, 2006.
- [24] B. W. Landis, V. R. Vattikuti, and M. T. Brannick. "Real-Time Human Perceptions: Toward a Bicycle Level of Service." *Transportation Research Record* 1578 (1997): 119-26.
- [25] R. Hughes and D. Harkey. "Cyclists' Perception of Risk in a Virtual Environment: Effects of Lane Conditions, Traffic Speed, and Traffic Volume." In *American Society of Civil Engineers (ASCE) Conference on Traffic Congestion and Traffic Safety in the 21st Century*. Chicago, IL, 1997.
- [26] M. Kokura, M. Suga, B. Lee, K. Shirakawa, T. Suwa and N. Ohmori. "Safety and Enjoyability Evaluation of Roads and Streets for Bicycles: Case Studies of Bicycle Maps from Utsunomiya and Chigasaki, Japan." *Journal of Maps* 6 (2010): 199-210.
- [27] J. K. Providelo and S. Sanches. "Roadway and Traffic Characteristics for Bicycling." *Transportation* 38, no. 5 (2011): 765–77.
- [28] N. Noël, C. Leclerc, and M. Lee-Gosselin. "Compatibility of Roads for Cyclists in Rural and Urban Fringe Areas." In the 82nd Annual Meeting of the Transportation Research Board. Washington, DC, 2003.
- [29] DELCAN. "City of Ottawa Road Corridor Planning and Design Guidelines." Ottawa: City Hall, 2008.
- [30] City of Calgary. "Pedestrian Policy and Design Report." Calgary, Alberta, Canada, 2008.
- [31] A. Sutherland and G. Morrish. "Street Design Guidelines." edited by Anna Petersen. Landcom, 2006.
- [32] City of Whittlesea. "City of Whittlesea Development Guidelines." Whittlesea: Municipal Policy Direction, 2009.
- [33] Narraberr Shire Council. "New South Wales Development Design Specification Geometric Road Design." New South Wales Narraberr Shire Council, 2001.
- [34] City of Charles Sturt. "Engineering & Open Space Development Guidelines—Road and Path Design Guidelines." Charles Sturt, South Australia, 2009.
- [35] C. Heramb. "Street and Site Plan Design Standards." Chicago: Chicago Department of Transportation, 2007.
- [36] E. Vanderslice. "Portland Pedestrian Design Guide." Portland: Office of Transportation Engineering and Development, 1998.
- [37] Ashland City Council. "Street Standard Handbook." Ashland: Department of community development, 1999.
- [38] Access Minneapolis. "Design Guidelines for Streets and Sidewalks." Minneapolis, 2008.
- [39] CDOT. "Charlotte's Urban Street Design Guideline." Charlotte: Charlotte Department of Transportation, 2007.
- [40] Pima County. "Subdivision and Development Street Standards." [http://www.pimaxpress.com/Dev\\_Review/PDFs/SubDevStreetStandards.pdf](http://www.pimaxpress.com/Dev_Review/PDFs/SubDevStreetStandards.pdf).
- [41] City of Aurora. "Aurora Urban Street Standards in Transit Oriented Developments and Urban Centers." Aurora, 2007.
- [42] D. Burden. "Street Design Guidelines for Healthy Neighborhoods." Paper presented at the TRB Circular E-C019: Urban Street Symposium, Dallas, Texas, 1999.
- [43] UTTIPEC. "Pedestrian Design Guidelines." New Delhi: Delhi Development Authority, 2009.
- [44] City of New York. "Street Design Manual." New York: Department of Transportation, 2009.
- [45] RDM. "Mn/Dot Road Design Manual." Minnesota: Minnesota Department of Transportation, 2010.
- [46] City of Tacoma. "Mobility Master Plan Bicycle and Pedestrian Design Guidelines." In *Tacoma Mobility Master Plan 1*. Tacoma, 2009.
- [47] Access Minneapolis. "City of Minneapolis Bicycle Facility Manual." City Of Minneapolis: Access Minneapolis, 2009.
- [48] N. Jackson, D. Gleason, and B. Gomberg. "Bike Lane Design Guide." Chicago: The Chicago Department of Transportation, 2002.
- [49] AASHTO. "Aashto Guide for the Planning, Design, and Operation of Bicycle Facilities." US: American Association of State Highway and Transportation Officials 2010.
- [50] O. Arup. "Cycle Infrastructure Design." England, Wales and Scotland: Department for Transport Scottish Executive Welsh Assembly Government, 2008.
- [51] TBP. "City of Toronto Bike Plan." Toronto: Toronto Bike Plan, 2001.
- [52] B. W. Landis. "Bicycle System Performance Measures." *ITE Journal* 66, no. 2 (1996): 18–26.
- [53] S. Turner, S. Shafer, and W. Stewart. "Bicycle Suitability Criteria for State Roadways in Texas." College Station: Texas Transportation Institute, 1997.
- [54] T. A. Petritsch, B.W. Landis, H.F. Huang, P. S. McLeod, D. Lamb, W. Farah, and M. Guttenplan. "Bicycle Level of Service for Arterials.." *Transportation Research Record* 2031 (2007): 34–42.
- [55] NCHRP. "Multimodal Level of Service Analysis for Urban Streets." Washington, DC: Transportation Research Board, 2008.
- [56] Z. Asadi-Shekari. "A Non-Motorized Level of Service Method for Evaluating Walking and Cycling Facilities on Urban Streets." *Universiti Teknologi Malaysia*, 2013.
- [57] FDOT. "Quality/Level of Service." Tallahassee, FL: Department of TransFigportation, 2009.