


Accepted Manuscript

Title: Economic Comparison of White, Green, and Black Flat Roofs in the United States

Author: Julian Sproul Man Pun Wan Benjamin H. Mandel
Arthur H. Rosenfeld

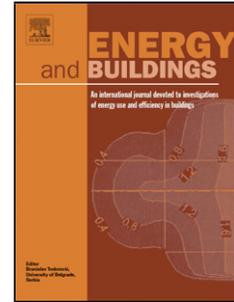

PII: S0378-7788(13)00765-2
DOI: <http://dx.doi.org/doi:10.1016/j.enbuild.2013.11.058>
Reference: ENB 4659

To appear in: *ENB*

Received date: 16-12-2012
Revised date: 11-11-2013
Accepted date: 18-11-2013

Please cite this article as: J. SPROUL, M.P. WAN, B.H. MANDEL, A.H. ROSENFELD, Economic Comparison of White, Green, and Black Flat Roofs in the United States, *Energy and Buildings* (2013), <http://dx.doi.org/10.1016/j.enbuild.2013.11.058>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

Economic Comparison of White, Green, and Black Flat Roofs in the United States

Julian SPROUL^a, Man Pun WAN^b, Benjamin H. MANDEL^{a,*}, and Arthur H. ROSENFELD^a

^a Lawrence Berkeley National Laboratory, One Cyclotron Road, Berkeley, CA 94720

^b School of Mechanical & Aerospace Engineering, Nanyang Technological University, Singapore

* Corresponding author

Contact details: julian.sproul@gmail.com, mpwan@ntu.edu.sg, benjamin.h.mandel@gmail.com (+1-516-672-2680), ahrosenfeld@lbl.gov

ABSTRACT

White and “green” (vegetated) roofs have begun replacing conventional black (dark-colored) roofs to mitigate the adverse environmental effects of dark and impervious urban surfaces. This paper presents an economic perspective on roof color choice, in particular the direct comparison of white and green roofs, by conducting a 50-year life-cycle cost analysis (LCCA). Using data collected from 22 flat roof projects in the U.S., we find that relative to black roofs, white roofs provide a 50-year net savings (NS) of \$25/m² (\$2.40/ft²) and green roofs have a negative NS of \$71/m² (\$6.60/ft²). An important implication is that green roofs never quite “pay.” Despite lasting at least twice as long as white or black roofs and therefore requiring fewer replacements, green roofs cannot compensate for their sizable installation cost premium of \$151/m² (\$14/ft²). However, while the 50-year NS of white roofs compared to green roofs is \$96/m² (\$8.90/ft²), the annualized cost premium is just \$3.20/m²-year (\$0.30/ft²-year). This annual sum should not deter owners from reaping the environmental and aesthetic benefits of green roofs (such as enhanced biodiversity, greater carbon sequestration, and increased property value) that are not captured in this LCCA. Choosing between a white and green roof should therefore be based on the preferences of the building owner. If global warming is a priority, then an owner should choose white roofs, which are three times more effective than green roofs in cooling the globe. If local environmental benefits are favored, then an owner should choose green roofs, which offer built-in stormwater management and a “natural” urban landscape aesthetic. Although black roofs are more cost-effective than green roofs and even white roofs in rare cases, we strongly recommend building code policies that phases out dark-colored roofs in warm climates to protect against their adverse public health externalities.

KEYWORDS: white roofs; green roofs; life-cycle cost analysis (LCCA); urban heat island; energy efficiency; stormwater management; building codes

GLOSSARY

| | |
|-----------------|---------------------------------------|
| A/C | air-conditioning |
| BMP | best management practice |
| BUR | built-up bituminous roofing |
| CO ₂ | carbon dioxide |
| CSO | combined sewer overflow |
| GHG | greenhouse gas |
| GSA | General Services Administration |
| LBNL | Lawrence Berkeley National Laboratory |
| LCCA | life-cycle cost analysis |
| LID | low-impact development |
| NO _x | nitrogen oxides |
| NS | net savings |
| O&P | overhead & profit |
| SO ₂ | sulphur dioxide |
| SR | solar reflectance |
| TPO | thermoplastic elastomers |
| UV | ultra-violet |
| VOC | volatile organic compound |

1. INTRODUCTION

1.1 Background

Rapid urbanization in the United States (U.S.) during the 20th century converted much of the nation's vegetation into urban areas, made up largely of buildings and pavements. According to the Statistical Abstract of the United States, nearly 75% of the U.S. population lives in large metropolitan areas [1]. In addition, U.S. buildings consume about 39% of total U.S. energy use, and contribute 40% of U.S. CO₂ emissions [2]. As global warming sets in, excess urban heat will exacerbate summer urban heat islands and lead to more heat-related deaths, respiratory illness, increased peak electricity use, and other ecologically adverse impacts.

These detrimental impacts of urbanization on society and the environment are partly attributable to the conventional use of black and dark-colored roofs on buildings throughout the U.S. The majority of the building sector in the U.S. is made up of impervious black or dark-colored roofs that absorb roughly 80% of incoming sunlight [3]. The sunlight that is absorbed heats the roof, which increases cooling costs in air-conditioned buildings, increases discomfort in unconditioned buildings, increases mortality during heat waves, and pollutes local and regional air. To mitigate the public health hazards associated with dark-colored roofs,¹ the construction industry has begun replacing them in recent years with two roofing alternatives—white and “green” (vegetated) roofs—that are much more beneficial to society and the urban environment.

1.2 White and Green Roofs are Displacing Black Roofs

For flat “cool roofs,” white is the most effective color. A white roof reflects 55-80%² of incident sunlight [3], keeping its surface cool on a clear summer day. This reduces heat transfer through the roof and makes the space below the roof more comfortable in unconditioned buildings. White roofs on air-conditioned buildings in hot climates can cut cooling energy use by 10-20% on the floor of the building immediately beneath the roof [6]. Cooler roof surfaces also mitigate the urban heat island effect, which improves air quality, reduces GHG emissions from power plants, and increases grid reliability during the summer (see online supplement for more information on types of white roofs).

¹ Excess deaths during the 2003 European heat wave were estimated to be over 50,000 [4]; analysis of the 1995 Chicago heat wave identified as a critical risk factor living on the top floor of a building (beneath a black roof) [5].

² Reflectance degrades as the white roof ages—a solar reflectance of 0.80 is typical of a new white roof, and a solar reflectance of 0.55 is typical after 1-2 years.

Moreover, increasing the solar reflectance of roof surfaces reduces the amount of heat absorbed at earth's surface and transferred into the atmosphere. This "albedo effect"³ counters global warming; studies estimate that converting 100 m² (roughly 1,000 ft²) of dark roof to white offsets the emission of 10 tonnes of CO₂ equivalent over the lifetime of the roof [6,7]. Akbari et al. [6] also estimate the global cooling potential for cool roofs (mainly flat white roofs) in cities with hot summers to have a one-time offset potential of 24 Gt CO₂e. Assuming that the world's average car emits 4 tonnes of CO₂ per year, this offset is roughly equivalent to taking half of the world's approximately 600 million cars off the road for 20 years.

Relative to white roofs, green roofs are less reflective of incoming sunlight and therefore have lower global cooling potential. Figure 4 of Gaffin et al. [8] indicates that average July SR of an extensive green roof is 0.20. We assume that an aged white roof has an SR of 0.55, which can be rounded to three times the green roof SR owing to the uncertainty in both SR estimates. This threefold difference in solar reflectance corresponds to a threefold difference in global cooling potential, which is a distinction no studies have made to date. Applied to the above greenhouse gas offsetting estimates from Akbari et al. [6], this suggests that replacing 100 m² of dark roof with a green roof offsets the emission of 3-4 tonnes of CO₂ equivalent over the lifetime of the roof (see **Table 1** for a comparison of global cooling potentials between white and green roofs). Thus white roofs, which offset 10 tonnes of CO₂ equivalent for every 100 m² of roof area, more

³ "Albedo" is a Greek term meaning "whiteness" and is used interchangeably with the term "solar reflectance."

effectively help to cool the world and mimic high-albedo land surfaces such as disappearing glaciers or Arctic sea ice.⁴

“Green” (vegetated) roofs vary in size, weight and vegetation, but they all shade the roof and protect it from water, UV damage, thermal cycling (expansion and contraction), and roof punctures. Vegetation and soil cool the roof’s surface and the nearby air in two major ways: 1) they provide additional insulation and thermal mass to the roof, which reduces the transfer of heat into the space below; 2) evapotranspiration transforms sensible heat into latent heat of vaporization. However, it should be noted that while this lowers the city air temperature, it does not influence global temperatures.⁵ On a sunny summer day, these factors reduce electricity use in air-conditioned buildings and improve comfort in non-air-conditioned buildings. By reducing electricity demand in cities, green roofs reduce the emission of air pollutants and GHGs from power plants, which in turn mitigates global warming and improves urban air quality.

Unlike white or black roofs, green roofs can be part of a building stormwater management plan. In wet weather, green roofs can reduce peak runoff by up to 65% and extend by 3 hours the time it takes for water to leave a site. “Extensive” green roofs (described more in Section 1.3.2 and in detail in the online supplement) intercept and retain the first 1-2 cm (0.5-0.8 in) of rainfall, preventing it from running off. In cities that require stormwater management plans, green roofs

⁴ This analysis relies solely upon comparing differences in albedo, and does not consider the resulting changes in upward fluxes of sensible and latent heat [39,40]. Nor does it consider any climate feedbacks, such as cloud formation and precipitation, that can result from changes in roof albedo [41]. We take these to be second-order effects on which no consensus currently exists, but we acknowledge their ability to affect our results.

⁵ Wind transfers cool moist air away from the city, where it condenses as rain. The heat released during condensation exactly cancels the evaporative cooling, so there is no net global cooling effect.

can save building owners money on both avoided stormwater fees and the costs of upgrading stormwater infrastructure [9]. This is particularly helpful in older cities that have undersized combined sewer systems.⁶ Additionally, green roofs can create natural habitats, limit noise pollution, and increase property values.

Relative to black roofs that increase urban climate vulnerability, white and green roofs confer social benefits that make cities more comfortable. However, because there is no standard protocol for quantifying these urban heat island-related externalities, comparisons among these three roofing strategies are limited. To date there have been a number of published case studies that compare green roofs to black roofs [9-13] and white roofs to black roofs [14-17]. However, we could not find a comprehensive comparison of green and white roofs.

This paper presents a 50-year LCCA⁷ for white, green, and black roofs using data collected from 22 flat roof projects or studies in the U.S. Even without accounting for important heat island-related externalities, we investigate whether white and green roofs offer purely economic advantages over black roofs. We seek to determine which roof type is most cost-effective over a 50-year life cycle, and we explore appropriate settings for each roofing strategy.

⁶ These cities may experience CSOs (combined sewer overflow), which result in the discharge of untreated wastewater and stormwater from a combined sewer system directly into a river, stream, lake, or ocean.

⁷ We refer to our analysis as an LCCA, whereas GSA [9] refers to its analysis as a cost-benefit analysis. We view these terms as interchangeable.

1.3 Roof Installation, Maintenance, and Replacement Costs

1.3.1 White Roof Installation and End-of-Service-Life Replacement Costs

White roofs are a cost-effective alternative to black roofs on flat roof buildings because their installation costs are comparable, and in some cases cheaper. The most expensive TPO membrane is only $\$20/\text{m}^2$ ($\$1.88/\text{ft}^2$) including O&P, which is $\$7.40/\text{m}^2$ ($\$0.69/\text{ft}^2$) cheaper than installing the cheapest BUR, which costs $\$28/\text{m}^2$ ($\$2.57/\text{ft}^2$) including O&P [18].⁸ For new and re-roofing commercial projects, the market share of asphalt-based roofs has dropped from its historical dominance to about 35% [19]. Furthermore, a study by Urban & Roth [20] showed that a white single-ply membrane now costs the same as a black single-ply membrane. We assume the first installation cost for white and black roofs to be equal at $\$22/\text{m}^2$.

Disposal costs for a white or black roof depend on the condition of the roof; if the existing roof is a membrane or a BUR that is still in fair condition, it can be simply covered by a new membrane. In this case there are no disposal costs, only the costs of labor and the new membrane.⁹ All roof lives are limited by three major natural forces: thawing/freezing, UV radiation, and daily thermal expansion/contraction. These latter two suggest that white membranes should have a longer service life than black membranes, and indeed there is much anecdotal evidence that they do; but actual measurements and statistics are lacking. This LCCA conservatively assumes that white and black membrane roofs have identical 20-year service lives.

⁸ The most expensive TPO is 60 mil. self adhered. The least expensive BUR is asphalt base sheet, 3 plies #15 asphalt felt, mopped.

⁹ This is the standard assumption we make in this study for product end-of-life condition.

1.3.2 Green Roof Installation and End-of-Service-Life Replacement Costs

Green roofs are typically more expensive to install than white or black. Peck and Kuhn [13] point out that even the cheapest category of green roof (extensive and inaccessible to the public) costs \$108–248/m² (\$10–23/ft²), including 10% O&P, while an intensive and publicly accessible green roof costs \$355–2,368/m² (\$33–220/ft²), including the same 10% O&P. Due to the wide range of green roof costs, this LCCA only includes the least expensive category—extensive. We use \$172/m² (\$16/ft²), the median installation cost of the 11 green roof projects surveyed in this report.

Because most of the green roof system components, e.g. growth media, sedum, etc., can be salvaged, the cost to replace an extensive green roof at the end of its service life is roughly 1/3 of the initial installation cost [9]. Thus we assume that the extensive green roof replacement cost is 1/3 the median installation cost, or \$57/m² (\$5.30/ft²).

1.3.3 Black and White Roof Maintenance Costs

Black and white roofs have similar maintenance needs that include various repair procedures (for punctures, leaks, etc.) as well as gutter and downspout cleanouts. The major difference in maintenance needs between black and white roofs is the issue of power washing to maintain high solar reflectance for white roofs. However, rather than including roof power washing in this LCCA, we assume that brand new white roofs are already weathered with an SR of only 0.55 (typical for an aged white roof).¹⁰ Thus, the annual maintenance cost for black and white roofs is

¹⁰ See online supplement for an analysis that shows power washing for white roofs not to be cost-effective relative to leaving the roof in a less reflective condition.

assumed to be the same at \$0.20/m²/year (\$0.02/ft²/year), which is the median maintenance cost of the 22 projects we surveyed.

1.3.4 Extensive Green Roof Maintenance Costs

The 40-year annual maintenance cost of an extensive green roof, including irrigation costs, is \$2.90/m² (\$0.27/ft²) [9], which is 20 times higher than for black and white roofs. The greatest maintenance costs occur during the first two growing seasons (i.e. the establishment period), which are critical to ensure the system's long-term success. During this period, at least two laborers are required to perform a minimum of three visits per year [9]. However, after the establishment period, the demand for maintenance is reduced slightly.

2. METHODOLOGY

2.1 Life-Cycle Cost Analysis (LCCA)

We use an LCCA to determine the net savings for green, white, and black roofs over a 50-year life cycle. Because green roofs are expected to last for at least 40 years (compared to 20 years for white and black roofs), a 50-year life cycle includes replacement costs for each of the three roof types analyzed in this study. The LCCA accounts for the following parameters: roof installation, replacement and maintenance, energy-related benefits (cooling/heating costs, A/C downsizing, peak shaving), avoided power plant emissions (CO₂, NO_x, & SO₂), equivalent CO₂ offset by global cooling (the “albedo effect”), and stormwater-related benefits (reduced fees and installation costs). Some other benefits of white or green roofs (relative to black roofs) are externalities that are either difficult to quantify or negligibly small, and are therefore NOT included in our LCCA. These include (among others) heat island mitigation, biodiversity, air quality, CO₂ sequestration, and increased property value.

Table 2 shows the lamentably sparse data collected from 22 case studies of building projects across the U.S. Many variables are regionally dependent, e.g., installation costs, water-for-irrigation costs, energy costs and demand, stormwater regulation/fees, roof size and accessibility. With only 22 case studies spread over seven ASHRAE Climate Zones [23], the data are clearly inadequate for regional LCCAs and we only use national median values.

We use **Equation 1** to calculate the net savings (NS) for each of three possible roof comparisons (xy = green-black, white-black, or white-green):¹¹

$$NS_{xy} = \sum_{t=0}^N \frac{S_{xy,t}(1+e_s)^t}{(1+d)^t} - \sum_{t=0}^N \frac{C_{xy,t}(1+e_c)^t}{(1+d)^t} \quad (1)$$

Here $S_{xy,t}$ represents the savings difference in year t between two roof types, $C_{xy,t}$ represents the cost difference in year t (including periodic replacement costs every 20 or 40 years), d is the intergenerational real discount rate (set to 3.0%), e_s and e_c are the annual fuel price escalation rates for the savings and costs respectively (averaging 0.4-2.6%), and N is the number of years in the life cycle (50 years).¹² A positive NS indicates that roof color x is more cost-effective and a negative NS indicates that color y wins.

¹¹ Note that although LCCA stands for life-cycle cost analysis, this report actually calculates and plots the net present value of savings (negative of costs), so the most desirable outcome is positive and not negative.

¹² Prices and escalation rates for energy and avoided emission of CO₂ are adopted from Rushing et al. [22].

2.2 Data Collection and Handling Sparse Data

We calculate present values of the inputs of interest over a 50-year horizon. The values of these inputs are mainly extracted from 22 case studies of flat-roofed buildings across the U.S. (summarized in Table 2). The costs reported in case studies are printed in bold within Table 2; the bottom row reports medians of each column's bold values. However, because the available data are so sparse that not a single one of the 22 cases presents enough values to evaluate Equation 1, we replace missing values with corresponding default values printed in italics. These default values are either medians of reported data or values gathered from relevant external sources regarding emission factors, air pollutant (CO_2 , SO_2 , NO_x) costs, stormwater infrastructure costs, and A/C equipment costs (default values are summarized in **Table 3**).

We can now apply Equation 1 first to *each* of the 22 case studies (as in Figure 1, discussed below, which compares the NS of white and green roofs). We can then use the same equation to compare default values (which are typically medians) in each roof color combination, as in Figure 2, also discussed below.

3. RESULTS

3.1 White Roofs Compared to Green Roofs

Figure 1 displays the net savings of only “White-Green” comparisons. In nearly all of the 22 ‘White-Green’ comparisons, the tall left stack reflects the fact that the white roof is much less expensive to install and maintain than the green roof. The shorter right stack shows the 50-year savings accrued by the green roof compared to the white roof, namely energy savings (cooling and heating), stormwater infrastructure and fee savings, and reduced power plant emissions. The

difference of the left and right stacks is the total overall net savings of ‘White-Green’ over a 50-year life cycle (indicated by the blank space beneath each project’s smaller stack in Figure 1).

The median net savings of the 22 roof projects is $\$102/\text{m}^2$ ($\$9.5/\text{ft}^2$) in favor of white roofs, shown as a gold bar on the far right hand side of the figure.¹³ The left-most project (#7) results in negative net saving values, meaning that a white roof is less cost-effective than a green roof for that project. For the remaining 21 projects however, white roofs are more cost-effective than green roofs, as pure roof costs (installation, maintenance, and, replacement) exceed the monetized environmental benefits of green roofs. It is important to note that we used one or more default values (shown in Table 3) in each of the 22 projects, so results would change as more real project cost and benefit data were included.

Figure 2 takes a different approach; this figure uses the default values of Table 3 as generic proxies for all 22 project evaluations.¹⁴ Figure 2 illustrates that the generic white roof, compared to the generic green roof, has a NS of $\$96/\text{m}^2$ ($\$8.90/\text{ft}^2$), which is comfortably close to the NS of $\$102/\text{m}^2$ ($\$9.5/\text{ft}^2$) shown on the far right of Figure 1. This means that white roofs are more cost-effective than green roofs over a 50-year life cycle and that a comparison of their generic costs is a reasonable representation of data from the 22 surveyed studies.

¹³ Note that although the median, in contrast to the mean, is insensitive to outliers, the standard deviation of the median is highly sensitive to outliers.

¹⁴ The error bars in Figure 2 come from variation in the 22 individual LCCAs that were used in Figure 1.

3.1.1 Roof Installation and Replacement Costs

The installation cost premium of green compared to white—\$151/m² (\$14/ft²)—dominates the economics of the 50-year life-cycle NS of white and green roofs. The expensive installation cost of green roofs also contributes to their expensive replacement cost, despite the fact that green roofs last at least twice as long as white. However, since the majority of green roof components can be salvaged and only the waterproofing membrane needs to be replaced, the difference in roof replacement NS between white and green roofs is a more modest \$35/m² (\$3.25/ft²) (See Table 3, Line 2).¹⁵ Moreover, the 50-year maintenance costs of green roofs are \$69/m² (\$6.40/ft²) more than those of white roofs owing to the need for additional maintenance for the vegetation. In this study, we only included the least costly type of green roofs (extensive), though the maintenance costs of green roofs can vary significantly according to the type of vegetation used.

3.1.2 Energy Costs

Green roofs save roughly \$11/m² (\$1/ft²) more than white roofs in energy costs because of the extra cooling effect of evapotranspiration during cooling seasons and the additional insulation of the growth medium during heating seasons. Depending on the climate, white roofs can lead to higher heating costs as a result of reduced solar heat gain, an effect referred to as the “winter heating penalty.” This penalty varies sensitively from southern states to northern states (see “Map of Winter Heating Penalty by State” in [36]). The higher energy savings of green roofs is directly correlated to the larger reduction of power plant emissions (of NO_x, SO₂ and CO₂), giving them an additional savings of about \$10.3/m² (\$0.96/ft²) compared to white roofs. The downsized A/C equipment savings were assumed to be the same for green and white roofs.

¹⁵ In year 40 the roof replacement NS is an insignificant \$5.40/m² (\$0.50/ft²).

3.1.3 Global Cooling

As discussed in Section 1.2, green roofs have less of a global cooling effect (in terms of CO₂ offsets) than white roofs, because green roofs have roughly one-third of the solar reflectance of white roofs. Surprisingly, this factor of three amounts to a relatively modest NS for white roofs of \$1.20/m² (\$0.10/ft²), as shown in Figure 2; this advantage contributes only roughly 1% of the total net benefit of white compared to green.

3.1.4 Stormwater-Related Costs

Savings from avoided stormwater-related costs (stormwater equipment downsizing, reduced stormwater maintenance and stormwater fee) are the major benefits of green roofs. The growth medium of the green roofs retains about half of the stormwater, which reduces the size of the residual stormwater management equipment (mainly cisterns) needed, particularly in cities that require a stormwater management plan for new buildings and major retrofits. The equipment downsizing results in a NS of about \$45/m² (\$4.20/ft²). Additionally, the reduced maintenance costs associated with the stormwater equipment downsizing (mainly the maintenance of cisterns) results in another \$36/m² (\$3.30/ft²) of NS (median value from GSA [9]). The extra stormwater retention capability of green roofs results in another \$22.2/m² (\$2/ft²) of NS. We assumed that white and black roofs both paid the stormwater runoff fee of \$0.90/m²-year (\$0.09/ft²-year) as well as the costs of installing and maintaining a cistern or infiltration chamber. These additional costs absorbed by the white and black roofs result in an advantage for green roofs.

Taking into consideration all of the parameters discussed above, green roofs are about \$96/m² (\$8.90/ft²) more costly than white roofs. The energy, air quality and stormwater benefits of green roofs add up to around \$125/m² (\$11.60/ft²), a large portion of which is offset by the high extra

costs of maintenance associated with green roofs over a 50-year period (an extra \$69/m² (\$6.40/ft²) compared to white roofs). However, the large first installation cost premium of green roofs remains the primary factor in its poor cost-effectiveness compared to white roofs.

3.2 Comparing all Three Roof Colors

3.2.1 Green-Black

As shown in Figure 2, green roofs are less cost-effective than black roofs, while white roofs are more cost-effective than black roofs. The high installation and maintenance costs of green roofs outweigh the savings they offer and are the major drivers of green roofs' poor cost-effectiveness relative to black roofs. The total savings from green roofs of \$149/m² (\$14/ft²) are completely offset by their additional installation costs of \$151/m² (\$14/ft²). Roof replacement and maintenance for green roofs add \$69/m² (\$6.40/ft²) to the costs, leaving green roofs \$71/m² (\$6.60/ft²) more expensive than black roofs over a 50-year life cycle.

3.2.2 White-Black

White roofs have the same low installation (and replacement) costs as black roofs. Thus, the savings from energy use, power plant emissions, and global cooling associated with white roofs lead to a NS of about \$26/m² (\$2.40/ft²) compared to black roofs over a 50-year life cycle. The maintenance costs were assumed the same for both white and black roofs.

4. DISCUSSION

4.1 Choosing a Roof Color

Decision-makers face three primary options when choosing a roof color—white, green, or black. While black hot-mop roofs have been historically dominant for flat-roofed buildings, factory-produced roof coatings and membranes have largely taken over the U.S. roofing market in recent

years. Since most of these products can be made white at no additional cost, the cost premium of white over black has virtually disappeared, and all of these technologies run from \$10–30/m² (\$1–3/ft²). Large corporations like Walmart, which owns hundreds of millions of square feet of roof space in the U.S., now choose white membrane roofs [42]. More recently, cities, states, government agencies and model building energy efficiency code organizations have implemented white roof requirements for new and replacement flat roofs on apartments and non-residential buildings.¹⁶

However, only a small fraction of cities and states in the U.S. are up-to-date in adopting these model standards including cool roofs. Accordingly, we recommend that every U.S. city and state as far north as Chicago, IL or Boston, MA implement a no-cost upgrade program for flat commercial building roofs to require white roofs for new construction and end-of-service-life roof replacements. This “no-cost upgrade program,” as recommended by Levinson [43], shows that a 20-year phase-in campaign of white roofs on all commercial flat roofs in the U.S. could save more than one quadrillion BTUs in net primary energy (a present value of nearly \$8 billion) at little or no extra up-front cost.¹⁷ The projects we surveyed confirm this first-cost parity. The purely economic 50-year net savings of \$25/m² (\$2.40/ft²) in favor of white roofs, though only \$1/m²-year when annualized, is likely to underestimate of the true societal advantages of white roofs—namely, dark roofs pose a public health threat by exacerbating urban heat islands. We

¹⁶ See the Global Cool Cities Alliance’s Cool Roofs and Pavements Toolkit (<http://coolrooftoolkit.org>) for a complete list of U.S. cool roof building codes and standards.

¹⁷ These net primary energy and cost savings differ from, but are based on, those reported in Table 1 of Levinson [43], which assumes an unrealistically instantaneous phase-in of white roofs on flat-roofed buildings in all RECS U.S. climate zones. We adjust those results by scaling the annual values by $\sum_{t=1}^{20} \left(\frac{1}{1+r}\right)^t \left(\frac{1}{1+r}\right)^t$ to determine results of a more realistic linear phase-in of white commercial roofs in all RECS U.S. climate zones over 20 years ($r=0.03$).

therefore recommend that architects and building owners choose white when deciding between white and black roofs.

Green roofs have also grown more popular in recent years, but our LCCA shows that green roofs are the least cost-effective of the three options studied, though only by a small margin on an annualized basis. Compared to green, white roofs offer a 50-year NS of $\$96/\text{m}^2$ ($\$8.90/\text{ft}^2$) and black roofs offer a NS of $\$71/\text{m}^2$ ($\$6.60/\text{ft}^2$) over the same period (see Figure 2). When annualized over 50 years, however, these premiums for green are just $\$2\text{-}4/\text{m}^2\text{-year}$ ($\$0.20\text{-}0.40/\text{ft}^2\text{-year}$). This annualized cost difference should not deter building owners who are relatively unconstrained by budget to opt for green roofs to capture their positive environmental qualities, heat island mitigation potential, and public health advantages—none of which are included in our LCCA.

4.2 Heat Island Mitigation and Policy Implications

As noted in Sections 1.1 and 1.2, white and green roofs offer local cooling benefits that can mitigate urban heat islands that have been partly caused by the prevalence of dark roofs. While we show black roofs to be more cost-effective than green roofs, and only slightly less cost-effective than white roofs, the factors included in our analysis are limited to those that can be monetized for the purposes of an economic comparison; choosing dark roofs in warm climates can exacerbate heat waves and risk human lives, which are not directly reflected in our LCCA. Conversely, choosing green roofs for their environmental or aesthetic benefits, in spite of their poor cost-effectiveness, risks only money rather than human lives.

White roofs are the most cost-effective strategy, even without accounting for their heat island mitigation virtues. Still, the fact that the large public health advantages of green or white roofs over black roofs cannot be incorporated into an economic analysis indicates that private actors will not always make the socially optimal roofing choice. This presents a strong case for public policy to intervene by phasing out black roofs in locations with hot summers, as has been implemented in California [38], Chicago, New York, and several smaller cities.

5. CONCLUSION

We conclude that the choice of white vs. extensive green roof should be based on the environmental and societal concerns of the decision-maker. If *global warming* is a major concern, white roofs, which are around three times as effective at cooling the globe as green roofs, will be the preferred choice. On the other hand if the *local environment* is a primary interest, green roofs will be preferred. Of course, stormwater management may be a decisive factor in favor of green roofs, particularly in the presence of strict local stormwater regulations.

This study was intended to address the choice between the two principal types of environmentally friendly roofing strategies—that is, white vs. green—by providing the first empirical comparison between them that we are aware of. Our economic results over a 50-year life cycle were conclusive in favor of white roofs, but only over a sample of 22 projects that are fairly representative of various U.S. regions. Still, our lessons learned from this comparison teach us that each individual choice between white and green roofs depends heavily on case-by-case factors. Among these, summer rainfall patterns, climate, energy prices, and stormwater management fees and policies may greatly influence the results of the comparison. We therefore

cannot present a simple conclusion for environmentally-friendly roofing, but we do strongly recommend either option over dark roofs that increase building energy costs, summer urban heat islands, and global warming.

6. ACKNOWLEDGMENTS

First we would like to thank the Heat Island Group at Lawrence Berkeley National Laboratory and the Energy Research Institute at Nanyang Technological University (ERI@N) through grant number (SERC 112-176-0021) for their financial support. Second we would like to thank the following individuals for their technical oversight and overall support: Ronnen Levinson, George Ban-Weiss, Kirstin Weeks, Jordan O'Brien, Adam Friedberg, Stuart Gaffin, Andre Desjarlais, Louise Dunlap, Robert Goo, Kent Peterson, Don Moseley, James McClendon, Scott Williams, Kurt Shickman, Chris Mackey, and Amy Nagengast. This work was supported by the Assistant Secretary for Energy Efficiency and Renewable Energy, Building Technologies Program of the U.S. Department of Energy under Contract No. DE-AC02-05CH11231.

7. REFERENCES

- [1] US Census Bureau, Statistical Abstract of the United States: 2011, 2011. Available at: <http://www.census.gov/compendia/statab>
- [2] Energy Information Administration, 2006 Annual Energy Report, 2006. Available at: http://www.me.mtu.edu/~jstallen/courses/MEEM4200/lectures/energy_intro/aer2006.pdf
- [3] H. Akbari, M. Pomerantz, H. Taha, Cool surfaces and shade trees to reduce energy use and improve air quality in urban areas, *Solar Energy* 70 (2001) 295–310.
- [4] J. Larsen, Setting the Record Straight: More than 52,000 Europeans Died from Heat in Summer 2003 Earth Policy Institute – Plan B Updates (2006). Available at: http://www.earth-policy.org/plan_b_updates/2006/update56
- [5] J.C. Semenza, C.H. Rubin, K.H. Falter, J.D. Selanikio, W.D. Flanders, H.L. Howe, J.L. Wilhelm. Heat-related deaths during the July 1995 heat wave in Chicago, *New England Journal of Medicine* 335(2) (1996) 84–90.

- [6] H. Akbari, S. Menon, A. Rosenfeld, Global cooling: increasing world-wide urban albedos to offset CO₂, *Climate Change* 94 (2009) 275–286.
- [7] S. Menon, H. Akbari, S. Mahanama, I. Sednev, R. Levinson, Radiative forcing and temperature response to changes in urban albedos and associated CO₂ offsets, *Environmental Research Letters* 5 (2010) 1–11.
- [8] S.R. Gaffin, R. Khanbilvardi, C. Rosenzweig. Development of a green roof environmental monitoring and meteorological network in New York City, *Sensors* 9 (2009) 2647–2660.
- [9] GSA, The Benefits and Challenges of Green Roofs on Public and Commercial Buildings: A Report of the United States General Services Administration, General Services Administration, Washington, DC, 2012.
- [10] S. Adams, D. Marriott, Cost Benefit Evaluation of Ecoroofs 2008, Environmental Services, Portland, OR, 2008. Available at: <http://www.portlandonline.com/bes/index.cfm?a=261053&c=50818>
- [11] T. Carter, A. Keeler, Life-cycle cost–benefit analysis of extensive vegetated roof systems, *Journal of Environmental Management*, 87 (2008) 350–363.
- [12] H. Niu, C. Clark, J. Zhou, P. Adriaens, Scaling of economic benefits from green roof implementation in Washington, DC, *Environmental Science and Technology*, 44 (2010) 4302–4308.
- [13] S. Peck, M. Kuhn, Design Guidelines for Green Roofs, Canada Mortgage and Housing Corporation, Ottawa, and the Ontario Association of Architects, Toronto, ON, 2010.
- [14] S. Konopacki, L. Gartland, H. Akbari, I. Rainer, Demonstration of Energy Savings of Cool Roofs. Paper LBNL-40673. Lawrence Berkeley National Laboratory, Berkeley, CA, 1998.
- [15] S. Konopacki, H. Akbari, Measured Energy Savings and Demand Reduction from a Reflective Roof Membrane on a Large Retail Store in Austin (PDF), CA Report No. LBNL-47149, Lawrence Berkeley National Laboratory, Berkeley, CA, 2001.
- [16] S. Konopacki, H. Akbari, Energy Savings for Heat Island Reduction Strategies in Chicago and Houston (Including Updates for Baton Rouge, Sacramento, and Salt Lake City), Report No. LBNL-49638, Lawrence Berkeley National Laboratory, Berkeley, 2002.
- [17] L. S. Rose, H. Akbari, H. Taha, Characterizing the Fabric of the Urban Environment: a Case Study of Greater Houston, Texas, Report No. LBNL-51448, Lawrence Berkeley National Laboratory, Berkeley, CA, 2003.
- [18] RS Means. Building Construction Cost Data 21st Annual Edition, 2002. Available at: <https://sites.google.com/a/lbl.gov/cool-white-planet/home/background-materials/RSMMeansRoofing.pdf?attredirects=0&d=1>
- [19] M. Dodson, The Growing Western Roofing Market, Western Roofing Insulation and Siding, 2013. Available at: <http://www.westernroofing.net/Home.html>
- [20] B. Urban, K. Roth, Guidelines for Selecting Cool Roofs, U.S. Department of Energy, Washington, DC, 2010.
- [21] RS Means, Green Building Cost Data Online, 2012. Online at: <https://sites.google.com/a/lbl.gov/cool-white-planet/home/background-materials/RSMMeansVegetatedRoofs.pdf?attredirects=0&d=1>

- [22] A.S. Rushing, J.D. Kneifel, B.C. Lippiatt. Energy Price Indices and Discount Factors for Life-Cycle Cost Analysis - 2010, Annual Supplement to NIST Handbook 135 and NBS Special Publication 709, National Institute of Standards and Technology, Gaithersburg, MD, 2010.
- [23] ASHRAE, Standard 90.1-2010 Energy Conservation in New Buildings Except Low Rise and Residential Buildings, American Society of Heating, Refrigerating and Air-Conditioning Engineers, Atlanta, GA, 2010.
- [24] S. Fuller, S. Petersen, NIST Handbook 135: Life-Cycle Costing Manual for the Federal Energy Management Program, National Institute of Standards and Technology, Gaithersburg, MD, 1995.
- [25] ABSIC, AOC Dirksen Green Roof Study: BIDS Year End Report. Advanced Building Systems Integration Consortium, Carnegie Mellon University, Pittsburgh, PA, 2008.
- [26] US EPA, Compilation of Air Pollutant Emission Factors Volume I: Stationary Point and Area Sources. U.S. Environmental Protection Agency, Research Triangle Park, NC, 1995.
- [27] US EPA, The Emissions & Generation Resource Integrated Database (eGRID), 2010. Available at: <http://www.epa.gov/cleanenergy/energy-resources/egrid/index.html>
- [28] GreenSave Calculator, Green Roofs for Healthy Cities, Vancouver, BC, 2011.
- [29] Departments of Environment, General Services, and Planning and Development, Final Report - Urban Heat Island Initiative Pilot Project, Chicago, IL, 2000.
- [30] Energy Star, Profile of Success: Energy Star Labeled Roof Products Case Study: Jefferson Houston Elementary School, Alexandria, VA, 2000a. Available at: http://www.energystar.gov/ia/partners/manuf_res/JeffersonHouston_new.pdf
- [31] Energy Star, Profile of Success: Energy Star Labeled Roof Products Case Study: Our Savior's Elementary School. Cocoa Beach, FL, 2000b. Available at: http://www.energystar.gov/ia/partners/manuf_res/OurSaviors_new.pdf
- [32] Portland Bureau of Environmental Services, Hamilton West Apartments Ecoroof, Portland, OR, 2005.
- [33] Portland Bureau of Environmental Services, Multnomah Building Green Roof, Portland, OR, 2004.
- [34] C. Walker, Cool Roof Case Study - Are white roofs cooler and more energy efficient than non-white roofs? Available at http://www.onsetcomp.com/application_stories/cool-roof-case-study
- [35] S.R. Gaffin, C. Rosenzweig, J. Eichenbaum-Pikser, R. Khanbilvardi, T. Susca, A Temperature and Seasonal Energy Analysis of Green, White, and Black Roofs, Center for Climate Systems Research, Columbia University, New York, NY, 2010. Available at: <http://www.coned.com/newsroom/news/pr20100503.asp>
- [36] H. Akbari, R. Levinson. Potential benefits of cool roofs on commercial buildings: conserving energy, saving money, and reducing emission of greenhouse gases and air pollutants, Energy Efficiency 3 (2010) 53–109.
- [37] R. Levinson, H. Akbari, S. Konopacki, S. Bretz, Inclusion of cool roofs in nonresidential Title 24 prescriptive requirements, Energy Policy, 33 (2005) 151–170.

- [38] California Energy Commission. 2008 Building Energy Efficiency Standard for Residential and Nonresidential Buildings, CEC-400-2008-001-CMF Sec. 143, California Energy Commission, Sacramento, CA, 2008, 96 pp.
- [39] M. Z. Jacobson, J. E. Ten-Hoeve, Effects of Urban Surfaces and White Roofs on Global and Regional Climate, Department of Civil and Environmental Engineering, Stanford University, Palo Alto, CA, 2011.
- [40] D. Millstein, S. Menon,. Regional climate consequences of large-scale cool roof and photovoltaic array deployment, Environmental Research Letters, 6 (2011) 034001.
- [41] G. Ban-Weiss, G. Bala, L. Cao, J. Pongratz, K. Caldeira, Climate forcing and response to idealized changes in surface latent and sensible heat, Environmental Research Letters, 6 (2011) 034032.
- [42] J. McClendon, Personal communication, 2012.
- [43] R. Levinson, The Case for Cool Roofs, Environmental Energy Technologies Division: Heat Island Group, Lawrence Berkeley National Laboratory, Berkeley, CA, 2011

Table 1. Solar Reflectance Summary for White and Green Roofs

| # | | Aged White Roof | Green Roof |
|---|--|---------------------|------------|
| 1 | Solar reflectance (SR) | 0.55 | 0.20 |
| 2 | Ratio of SR (white/green) | 2.75 (rounded to 3) | 1 |
| 3 | One-time emitted CO ₂ offset (t CO ₂ e/100 m ²) | 10 | ~ 3 |
| 4 | Row 3 converted to an annual rate over a 20-year roof service life (t/year) | 0.5 | 0.15 |
| 5 | Global potential for cool roofs relative to black roofs, <i>one-time</i> CO ₂ offset (Gt) | 24 | 8 |
| 6 | Row 5 converted to annual rate over a 20 yr. roof service life (Gt/year) | 1.2 | 0.4 |

As first estimated by Akbari et al. [6], converting 100 m² of dark roof to white offsets the emission of ~10 tonnes of CO₂. Therefore, according to the (2.75 +/- 0.5):1 ratio of the SR of white and green roofs, 100 m² of green roof has a one-time global warming offset potential of 3-4 tonnes of CO₂ equivalent.

Table 2. Summary of 22 Surveyed Projects (Key Data and Their Medians)¹

| # | Project | Location | New/ Reroof | Year | Area (m ²) | First installation (\$/m ²) | | | Maintenance (\$/m ² /yr) [§] | | | Heating energy savings relative to black (\$/m ² /yr) | | | Cooling energy savings relative to black (\$/m ² /yr) | | | Roof life (years) | | | Source |
|---------------------|-------------------------|-----------------|----------------|------|---------------------------|--|-----------|-----------|---|-----|-----|--|----------------|------------|--|------------|-----------|-------------------|-----------|--------------|--------|
| | | | | | | G | W | B | G | W | B | G | W [#] | B | G | W | B | G | W | B | |
| 1 | Buchanan R-Mer Lite | Illinois | New | 2008 | 1988 | 172 | 99 | 22 | 2.9 | 0.2 | 0.2 | 0.3 | 0.0 | 0.3 | 0.2 | 0.0 | 25 | 30 | 20 | [28] | |
| 2 | Buchanan White PVC | Illinois | New | 2008 | 1988 | 172 | 73 | 22 | 2.9 | 0.2 | 0.2 | 0.3 | 0.0 | 0.3 | 0.2 | 0.0 | 30 | 20 | 20 | [28] | |
| 3 | Chicago City Hall | Chicago, IL | New | 2001 | 1886 | 215 | 22 | 129 | 2.9 | 0.2 | 0.2 | 0.7 | 0.0 | 0.3 | 0.2 | 0.0 | 40 | 20 | 20 | [29] | |
| 4 | Forrestal combined | Washington D.C. | New | | 4644 | 226 | 31 | 22 | 0.5 | 1.1 | 0.2 | 0.7 | 0.0 | 0.4 | 0.4 | 0.0 | 30 | 20 | 20 | DOE 2008* | |
| 5 | Niu et al. (9 projects) | Washington D.C. | N/A | 2008 | 1794 | 210 | 22 | 242 | 2.9 | 0.2 | 0.2 | 0.0 | 0.0 | 0.3 | 0.2 | 0.0 | 40 | 20 | 20 | [12] | |
| 6 | Fieldston | New York, NY | N/A | 2007 | 8779 | 183 | 22 | 75 | 2.9 | 0.2 | 0.2 | 0.3 | 0.0 | 0.3 | 0.2 | 0.0 | 30 | 20 | 20 | Gaffin 2009* | |
| 7 | Walmart Chicago | Chicago, IL | New | 2006 | 6968 | 108 | 2.6 | 22 | 0.9 | 1.9 | 0.2 | 0.3 | 0.0 | 0.6 | 0.2 | 0.0 | 40 | 15 | 20 | Arup 2011* | |
| 8 | Jefferson School | Alexandria, VA | Reroof | 1994 | 7711 | 172 | 42 | 22 | 2.9 | 0.2 | 0.2 | 0.3 | 0.0 | 0.3 | 4.0 | 0.0 | 40 | 20 | 20 | [30] | |
| 9 | Tanyard | Athens, GA | N/A | 2002 | 929 | 155 | 22 | 84 | 2.9 | 0.2 | 0.2 | 0.3 | 0.0 | 0.4 | 0.2 | 0.0 | 40 | 20 | 20 | [11] | |
| 10 | Our Savior's | Cocoa Beach, FL | Reroof | 1995 | 1115 | 172 | 5 | 22 | 2.9 | 0.2 | 0.2 | 0.3 | 0.0 | 0.3 | 0.2 | 0.0 | 40 | 20 | 20 | [31] | |
| 11 | Portland Building | Portland, OR | New | 2008 | 3716 | 170 | 22 | 108 | 0.3 | 0.2 | 0.1 | 0.2 | 0.0 | 0.2 | 0.2 | 0.0 | 40 | 20 | 20 | [10] | |
| 12 | Hamilton Apt. Building | Portland, OR | Reroof | 1999 | 780 | 164 | 22 | 22 | 2.9 | 0.2 | 0.2 | 0.3 | 0.0 | 0.3 | 0.2 | 0.0 | 40 | 20 | 20 | [32] | |
| 13 | Multnomah | Portland, OR | Reroof | 2003 | 1115 | 162 | 22 | 108 | 2.9 | 0.2 | 0.2 | 0.3 | 0.0 | 0.3 | 0.2 | 0.0 | 40 | 20 | 20 | [33] | |
| 14 | Large Retail Store | Austin, TX | Reroof | 2000 | 9290 | 172 | 16 | 16 | 2.9 | 0.2 | 0.2 | 0.3 | 0.0 | 0.3 | 0.6 | 0.0 | 40 | 13 | 13 | [14] | |
| 15 | Kaiser Permanente | Davis, CA | Reroof | 1997 | 2945 | 172 | 22 | 22 | 2.9 | 0.2 | 0.2 | 0.3 | 0.0 | 0.3 | 0.7 | 0.0 | 40 | 20 | 20 | [14] | |
| 16 | Kaiser Permanente | Gilroy, CA | Reroof | 1996 | 2211 | 172 | 22 | 22 | 2.9 | 0.2 | 0.2 | 0.3 | 0.0 | 0.3 | 0.4 | 0.0 | 40 | 20 | 20 | [14] | |
| 17 | Longs Drugs | San Jose, CA | Reroof | 1997 | 3056 | 172 | 22 | 22 | 2.9 | 0.2 | 0.2 | 0.3 | 0.0 | 0.3 | 0.0 | 0.0 | 40 | 20 | 20 | [14] | |
| 18 | Sacramento Office | Sacramento, CA | Reroof | 1996 | 2285 | 172 | 19 | 19 | 2.9 | 0.2 | 0.2 | 0.3 | 0.0 | 0.3 | 0.1 | 0.0 | 40 | 20 | 20 | [14] | |
| 19 | Sacramento Museum | Sacramento, CA | Reroof | 1997 | 455 | 172 | 22 | 22 | 2.9 | 0.2 | 0.2 | 0.3 | 0.0 | 0.3 | 0.2 | 0.0 | 40 | 20 | 20 | [14] | |
| 20 | Sacramento Hospice | Sacramento, CA | Reroof | 1997 | 557 | 172 | 14 | 13 | 2.9 | 0.2 | 0.2 | 0.3 | 0.0 | 0.3 | 0.2 | 0.0 | 40 | 20 | 20 | [14] | |
| 21 | Scottsdale Insurance | Scottsdale, AZ | New | 2008 | 1059 | 172 | 86 | 22 | 2.9 | 0.2 | 0.2 | 0.3 | 0.0 | 0.3 | 0.2 | 0.0 | 40 | 20 | 20 | [34] | |
| 22 | Con Edison | New York, NY | New | 2008 | 1000 | 172 | 22 | 22 | 2.9 | 0.2 | 0.2 | 0.3 | 0.0 | 0.2 | 0.1 | 0.0 | 40 | 20 | 20 | [35] | |
| Median value | | | | | | 172 | 22 | 22 | | | | 0.3 | 0.0 | 0.3 | 0.2 | 0.0 | 40 | 20 | 20 | | |

Key: G = green; B = black, W = white; \$ = defaults from external sources rather than medians; # = no data on winter heating penalty for white; * = personal communication

¹ In contrast to the roof costs from RS Means quoted above, which include O&P, the values here do not include O&P.

Table 3. Median Value Inputs

| Installation, replacement and maintenance | Green | White | Black | Remarks |
|--|------------------|------------------|------------------|--|
| First installation cost (\$/m²) | 172 | 22 | 22 | Median value from Table 2, including labor |
| Replacement cost (\$/m²) | 57 | 22 | 22 | Assumed equal to first installation cost for white & black, 1/3 of first installation cost for green |
| Maintenance cost (\$/m²-year) | 2.9 ^a | 0.2 | 0.2 ^b | Median value from Table 2 |
| Roof life (years) | 40 | 20 | 20 | Median value from Table 2 |
| Disposal cost (\$/m²) | 1.3 | 0 | 0 | One-time |
| Energy-related benefits (relative to black) | | | | |
| Avoided heating fuel cost (\$/m²-year) | 0.3 | 0 ^c | 0 | Median value from Table 2 |
| Avoided cooling electricity cost (\$/m²-year) | 0.3 | 0.2 | 0 | Median value from Table 2 |
| Peak load shaving benefit (\$/m²) | 2.2 | 2.2 ^d | 0 | ABSIC [25] |
| Air-quality-related benefits (relative to black) | | | | |
| Avoided CO₂ emission^{e,f} (kg/m²-year) | 5.7 | 4.3 | 0 | Estimated from energy saving data |
| Avoided NO_x emission^{e,g} (\$/m²-year) | 0.011 | 0.009 | 0 | Estimated from energy saving data |
| Avoided SO₂ emission^{e,g} (\$/m²-year) | 0.013 | 0.011 | 0 | Estimated from energy saving data |
| CO₂e offset by global cooling^f (kg/m²) | 34 | 100 | 0 | One-time |
| Stormwater-related benefits (relative to green) | | | | |
| Annual stormwater fee (\$/m²-year) | 0 | 0.9 | 0.9 | Assume white & black retain same amount of stormwater as green – impervious surface fee ^h |
| Annual stormwater BMP maintenance (\$/m²-year) | 0 | 1.5 | 1.5 | Median value [9] |
| Stormwater BMP equipment cost (\$/m²) | 0 | 44.7 | 44.7 | One-time/replacement |

^a The cost is spread across the 50 years. Adopted from GSA [9]

^b Assumed to be the same as white roofs.

^c None of the 22 case studies provided data for the winter heating penalty, thus this overstates the net savings

^d Data available for green roof only. Same value was assumed for white roofs because the cost difference is insignificant

^e Source of emission factors: Heating fuel – USEPA [26], Electricity – USEPA [27]

^f Source of price information for CO₂: the costs of CO₂, increasing linearly from \$0/t in 2005 to \$115/t in 2060 [22]

^g Source of price information for NO_x and SO₂: [12]

^h This assumption refers to case #11 (Portland Building) in which up to 35% of the stormwater fee can be waived by installing a green roof or another best management practice [10].

Figure 1. Comparison of white and green roofs for each of the 22 surveyed projects

“Project #” from Table 2


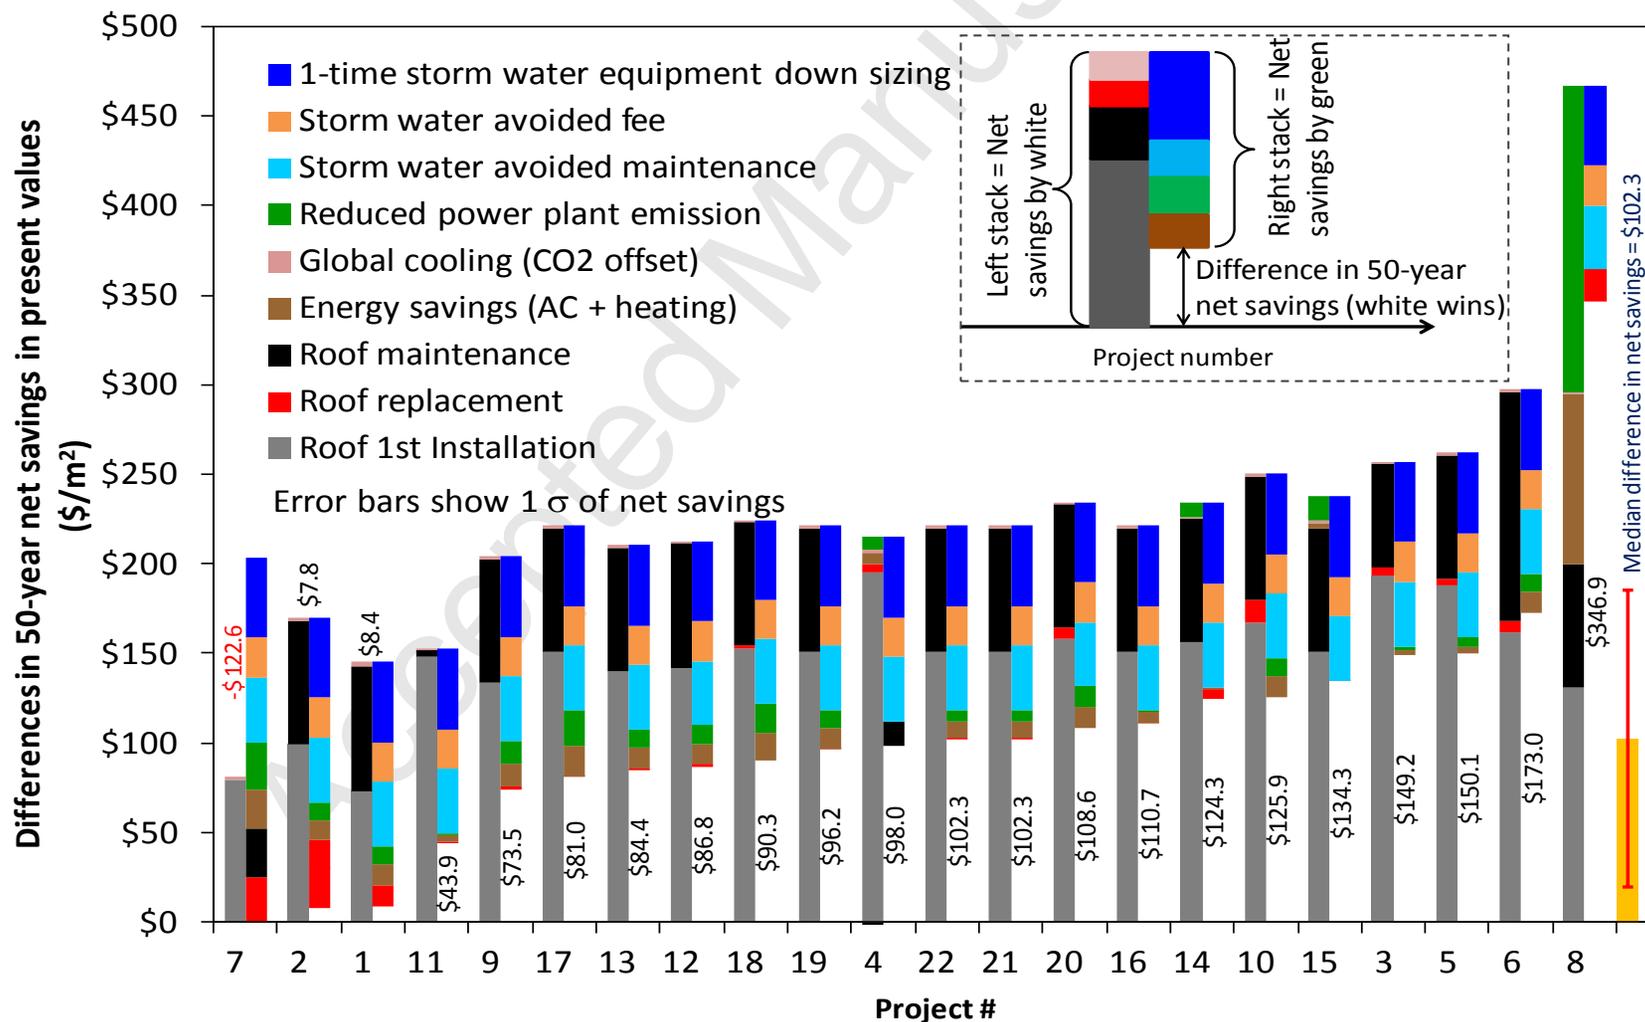


Figure 2. Net present value (NPV) of 50-year life cycle savings for three different roof color comparisons

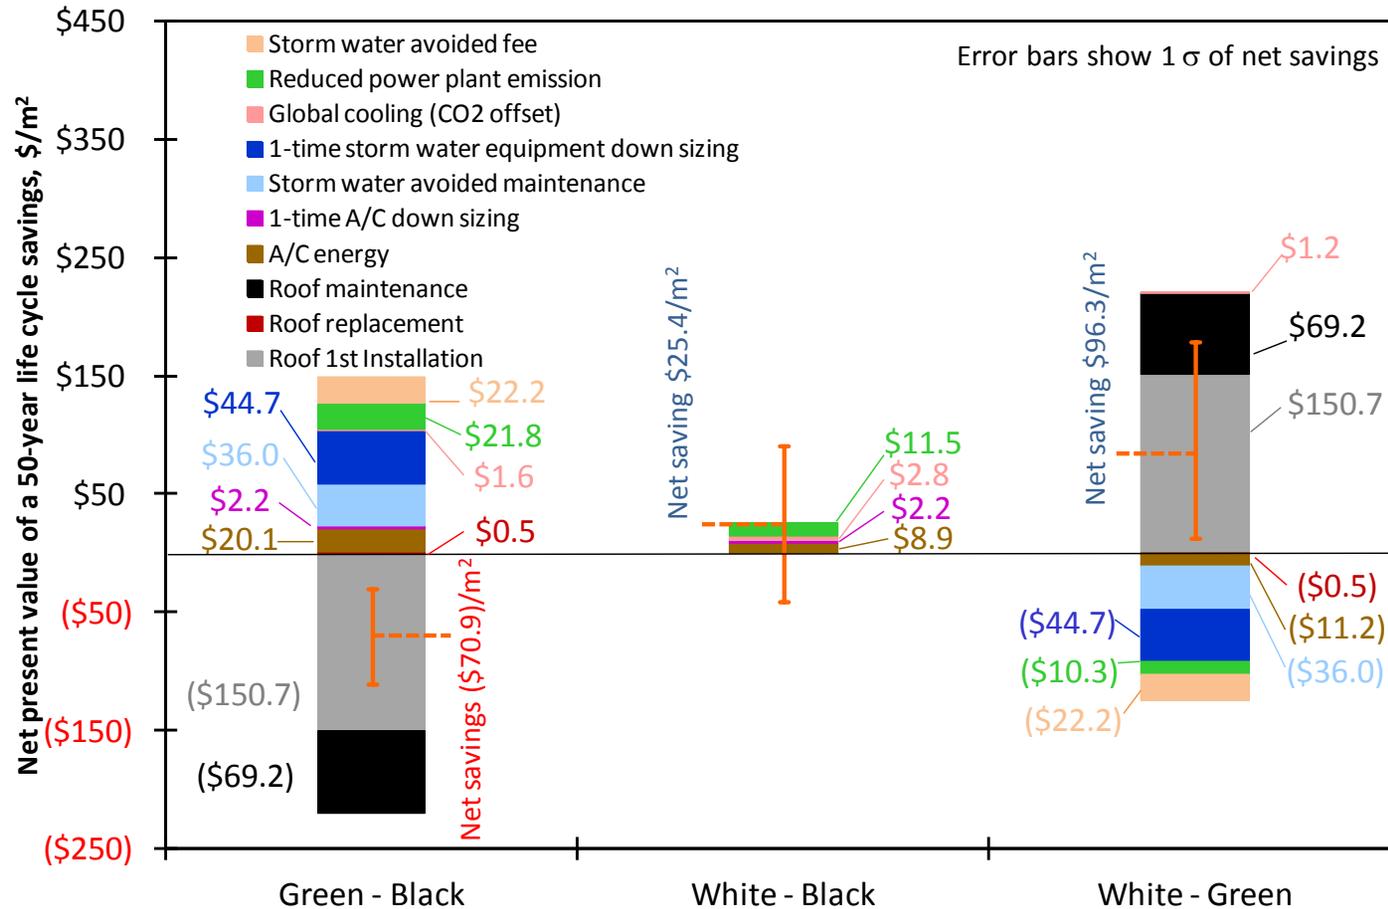

The costs and benefits difference stack that has the highest NPV shows the roof type that is most cost-effective. For example, the “white – green” stack has a high NPV, meaning that white is more cost-effective than green. Parentheses around dollar values indicate negative values, thus the vertical scale turns negative below the zero line and thus in ‘Green-Black’ the net savings, $(\$70.90/\text{m}^2)$ indicates a negative net savings. Note that the gray column for green is dominated by its median first installation cost premium, $\$150.70/\text{m}^2$.

Research Highlights of “Economic Comparison of White, Green, and Black Flat Roofs in the United States”

Julian SPROUL, Man Pun WAN, Benjamin H. MANDEL, and Arthur H. ROSENFELD

- The life-cycle costs of white roofs are less than those of black roofs.
- Green roofs are more expensive over their life-cycle than white or black roofs.
- Green roofs’ high installation/replacement costs outweigh their long service lives.
- Per unit area, white roofs cool the globe 3x more effectively than green roofs.
- Dark roofs should be phased out in warm climates for public health purposes.