

An Overview of Recent Developments in Electric Propulsion for NASA Science Missions

Eric J. Pencil
 NASA Glenn Research Center
 21000 Brookpark Road
 Cleveland, OH 44135
 216-977-7463
 Eric.J.Pencil@nasa.gov

Abstract—The primary source of electric propulsion development throughout NASA is managed by the In-Space Propulsion Technology Project at the NASA Glenn Research Center for the Science Mission Directorate. The objective of the Electric Propulsion project area is to develop near-term electric propulsion technology to enhance or enable science mission while minimizing risk and cost to the end user. Major hardware tasks include developing NASA’s Evolutionary Xenon Thruster (NEXT), developing a long-life High Voltage Hall Accelerator (HIVHAC), developing an advanced feed system, and developing cross-platform components. The objective of the NEXT task is to advance next generation ion propulsion technology readiness. The NEXT system consists of a high-performance, 7-kW ion thruster; a high-efficiency, 7-kW power processor unit (PPU); a highly flexible advanced xenon propellant management system (PMS); a lightweight engine gimbal; and key elements of a digital control interface unit (DCIU) including software algorithms. This design approach was selected to provide future NASA science missions with the greatest value in mission performance benefit at a low total development cost. The objective of the HIVHAC task is to advance the Hall thruster technology readiness for science mission applications. The task seeks to increase specific impulse, throttle-ability and lifetime to make Hall propulsion systems applicable to deep space science missions. The primary application focus for the resulting Hall propulsion system would be cost-capped missions, such as competitively-selected, Discovery-class missions. The objective of the advanced xenon feed system task is to demonstrate novel manufacturing techniques that will significantly reduce mass, volume, and footprint size of xenon feed systems over conventional feed systems. The task has focused on the development of a flow control module, which consists of a three-channel flow system based on a piezo-electrically actuated valve concept. Component standardization and simplification are being investigated through the Standard Architecture task to reduce first user costs for implementing electric propulsion systems. Progress on current hardware development, recent test activities and future plans are discussed.^{1 2}

TABLE OF CONTENTS

NOMENCLATURE	1
1. INTRODUCTION	2
2. NASA’S EVOLUTIONARY XENON THRUSTER (NEXT) ION PROPULSION SYSTEM	2
3. HIGH VOLTAGE HALL ACCELERATOR (HIVHAC) THRUSTER.....	5
4. ADVANCED XENON FEED SYSTEM	6
5. STANDARD ARCHITECTURE	7
6. CONCLUSIONS	7
7. ACKNOWLEDGEMENTS.....	7
REFERENCES.....	8
BIOGRAPHY	9

NOMENCLATURE

ASOA	= Advanced State-Of-Art
AXFS	= Advanced Xenon Feed System
DCA	= Discharge Cathode Assembly
DCIU	= Digital Control Interface Unit
EM	= Engineering Model
FCM	= Flow Control Module
GRC	= Glenn Research Center
HIVHAC	= High Voltage Hall Accelerator
HPA	= High Pressure Assembly
IPS	= Ion Propulsion System
ISPT	= In-Space Propulsion Technology
JPL	= Jet Propulsion Laboratory
LDT	= Long Duration Test
LPA	= Low Pressure Assembly
mN	= milli-Newton
MTAT	= Multi-Thruster Array Test
NCA	= Neutralizer Cathode Assembly
NEXT	= NASA's Evolutionary Xenon Thruster
NSTAR	= NASA’s Solar Electric Propulsion Technology Application Readiness
PAT	= Performance Assessment Test
PCM	= Pressure Control Module
PM	= Prototype Model
PMS	= Propellant Management System
PPU	= Power Processing Unit
SMD	= Science Mission Directorate
SOA	= State-Of-Art

¹ U.S. Government work not protected by U.S. copyright.

² IEEEAC paper #1470, Version 2, Posted December 21, 2007.

1. INTRODUCTION

NASA's Science Mission Directorate (SMD) conducts scientific exploration that is enabled by access to space. NASA's SMD is organized by Mission Directorates that focus on investigations of the Earth, Sun, Solar System and Universe. The focus of solar system exploration is to extend humanity's presence throughout the solar system through robotic encounters to the other planets and their moons, to asteroids and comets, and to icy bodies in the outer reaches of our solar system. The progression of robotic missions is from observers to rovers to sample return missions. Each step is bringing us closer to the principal scientific goals: to understand our origins, to learn whether life does or did exist elsewhere in the solar system and to prepare for human expeditions to the Moon, Mars, and beyond [1]. Such ambitious goals exceed the capabilities provided by conventional technologies and will ultimately require improved spacecraft capabilities such as those obtained by advanced propulsion technologies.

Within SMD the In-Space Propulsion Technology (ISPT) Project is responsible for developing advanced propulsion capabilities to enable or to enhance science missions. NASA Glenn Research Center (GRC) is responsible for managing the ISPT Project for SMD. Recently ISPT has focused on the development of advanced chemical propulsion, aerocapture, and electric propulsion [2]. In advanced chemical propulsion, developments have included ultra light-weight tanks, and high temperature thrusters. Aerocapture investment has developed new ablative thermal protection systems, and associated instrumentation as well as improved models for guidance, navigation, and control of blunt body rigid aeroshells, atmospheric models for Earth, Titan, Mars and Venus, and models for aerothermal effects. Investments in electric propulsion have focused on completing the NEXT ion propulsion system, a throttleable gridded ion thruster propulsion system suitable for future Discovery, New Frontiers, and Flagship missions. A novel Hall thruster concept has been developed to demonstrate a long-life, highly throttleable thruster ideally suited for cost capped missions, like NASA Discovery missions. A novel feed system is being developed, which will significantly reduce the mass and size of future electric propulsion xenon feed systems. Component standardization and simplification are being implemented through Standard Architecture activities to develop a digital control interface unit and simplified feed system. In addition to hardware development activities, ISPT performs mission analysis to assess system-level benefits in applying advanced propulsion technologies into robotic science missions [3].

Conventional chemical propulsion uses a chemical reaction to heat combustion byproducts, which are vented through a nozzle creating directed kinetic energy. Ultimately the thruster performance is limited by the chemical energy from the combustion reaction as well as the material temperature limits of the rocket chamber. Electric propulsion bypasses

this limitation by using electrical energy to ionize and accelerate the rocket (thruster) propellant. The higher thruster performance (or specific impulse) comes at a lower thrust level, necessitating longer thruster operation times. System mission studies must factor these differences in thruster operation profiles as well as component masses for other subsystem components, such as power processing units, feed systems, etc.

Electric propulsion systems are categorized by acceleration mechanism: electrothermal, electrostatic and electromagnetic. Electrothermal thrusters use electrical power to heat propellants thermally by resistive heaters or by passing the propellants through an electrical arc. Electrostatic thrusters use electrical power to ionize the propellant (like xenon), which is accelerated through a voltage potential (or electrostatic forces). Electromagnetic thruster use electrical power to ionize the propellant, which is accelerated by Lorentz forces (or electromagnetic forces).

Electric propulsion is a technology area that is coming of age with application to a wide variety of applications. Over 212 recently launched spacecraft have incorporated electric propulsion, including commercial geosynchronous communication satellites and other deep space robotic science missions. One spacecraft of significance is the Dawn spacecraft, which was successfully launched in September 2007. This mission, enabled by the ion propulsion system, will investigate two of the heaviest main-belt asteroids; Vesta and Ceres [4].

ISPT has focused on near-term, robotic, interplanetary science missions. Given the mission constraints, like available spacecraft power and performance requirements, ISPT has focused on the development of electrostatic thrusters, such as ion thrusters and hall thrusters. This paper will elaborate on recent hardware development activities within the ISPT electric propulsion portfolio.

2. NASA'S EVOLUTIONARY XENON THRUSTER (NEXT) ION PROPULSION SYSTEM

Description

The objective of the NEXT project is to advance next generation ion propulsion technology readiness. As shown in Figure 1, the NEXT system consists of a high-performance, 7-kW ion thruster; a high-efficiency, 7-kW power processor unit (PPU); a highly flexible xenon propellant management system (PMS); a lightweight engine gimbal; and key elements of a digital control interface unit (DCIU) including software algorithms [5-9]. The NEXT team consists of NASA GRC as technology project lead, JPL as system integration lead, Aerojet as Prototype (PM) thruster, PMS, and DCIU simulator developer, and L3 Communications ETI as PPU developer. This design

approach was selected to provide future NASA science missions with the greatest value in mission performance benefit at a low total development cost. Technology validation and mission analysis efforts, conducted in Phase 1, indicated the NEXT propulsion system can provide the capabilities to achieve aggressive outer planetary science missions and that Phase 2 development was warranted.

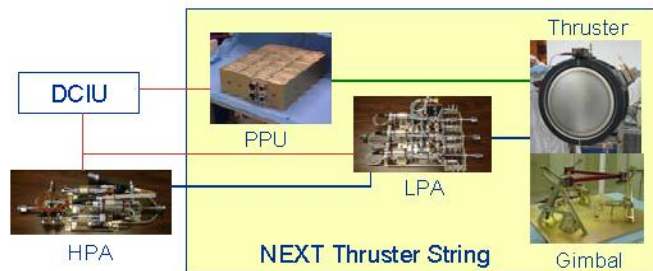


Figure 1 – NEXT Ion Propulsion System Components.

Recent Progress

The NEXT thruster and other component technologies represent a significant advancement in technology beyond state-of-art (SOA) NSTAR thruster systems. NEXT performance exceeds single or multiple NSTAR (NASA’s Solar Electric Propulsion Technology Application Readiness) thrusters over most of the thruster input power range. Higher efficiency and specific impulse, and lower specific mass reduce the wet propulsion system mass and parts count. The NEXT thruster xenon propellant throughput capability is more than twice NSTAR’s, so fewer thrusters are needed. The NEXT power processor and propellant feed system technologies provide specific mass and performance benefits versus SOA technology, which translate into better science capability for a given spacecraft or mission. Comparisons of NEXT and SOA NSTAR performance characteristics are listed in Table 1. The NEXT development task has also placed particular emphasis on key aspects of ion propulsion system (IPS) development with the intention of avoiding the difficulties experienced by the Dawn mission in transitioning the NSTAR-based technology to an operational ion propulsion system. These aspects are discussed in more detail later.

Table 1. Performance Characteristics of NEXT vs. SOA Ion (NSTAR).

Characteristic	NEXT	SOA Ion
Thruster Power Range, kW	0.5-6.9	0.5-2.3
Throttle Ratio	>12:1	4:1
Max. Specific Impulse, sec	>4100	>3100
Max. Thrust, mN	236	92
Max. Thruster Efficiency	>70%	>61%
Propellant Throughput, kg	>300	235
Specific Mass, kg/kW	1.8	3.6
Max. PPU Efficiency	94%	92%
PPU Specific Mass, kg/kW	4.8	6.0
PMS Single-String Mass, kg	5.0	11.4

The Prototype Model (PM1) thruster exhibited operational behavior consistent with its engineering model predecessors, but with substantial mass savings, enhanced thermal margins, and design improvements for environmental testing compliance [10]. A study of the thruster-to-thruster performance dispersions quantified a bandwidth of expected performance variations both on a thruster and a component level by compiling test results of five engineering model and one-flight-like model thrusters [11]. The thruster throughput capability was predicted to exceed 750 kg of xenon, an equivalent of 36,500 hours of continuous operation at full power [12]. The first failure mode for operation above a specific impulse of 2000 s is expected to be the structural failure of the ion optics at 750 kg of propellant throughput, 1.7 times the qualification requirement [12]. A Long-Duration Test (LDT) was initiated to validate and qualify the NEXT propellant throughput capability to a qualification-level of 450 kg, 1.5 times the mission-derived throughput requirement of 300 kg. As of November 30, 2007, the Engineering Model thruster has accumulated 13,200 hours of operation at the thruster full power of 6.9 kW as shown in Figure 2. The thruster has processed 271 kg of xenon and demonstrated a total impulse of 1.11×10^7 N-s; the highest total impulse ever demonstrated by an ion thruster [13].



Figure 2 – NEXT EM3 Long Duration Test Thruster.

The PM1 thruster was subjected to qualification-level environmental testing to demonstrate compatibility with environments representative of anticipated mission requirements. Thruster functional testing was performed before and after the vibration and thermal-vacuum tests. Random vibration testing, conducted with the thruster mated to the breadboard gimbal was executed at 10.0 Grms for two minutes in each of three axes. Thermal-vacuum testing included a deep cold soak of the engine to temperature of -168 °C and thermal cycling from -120 °C to +203 °C [14]. Thermal development testing of the NEXT Prototype Model-1 (PM1) was conducted to assist in developing and validating a thruster thermal model and assessing the thermal design margins [15]. An ion thruster

thermal model has been developed for the latest PM design to aid in predicting thruster temperatures for various missions. This model has been correlated with a thermal development test on the NEXT PM1 thruster with most predicted component temperatures within 5-10 °C of test temperatures [16]. The environmental tests identified some shortcomings to the PM thruster design, which necessitated bringing together the design team to identify and implement minor design changes. Recently the reworked PM thruster (now designated PM1R) was subjected to the same series of qualification-level environmental tests as shown in Figure 3. Post-test performance assessment test and inspection have shown that thruster performance was nominal and unchanged throughout the test and at post-test conditions, which completes environmental test validation of the PM thruster.

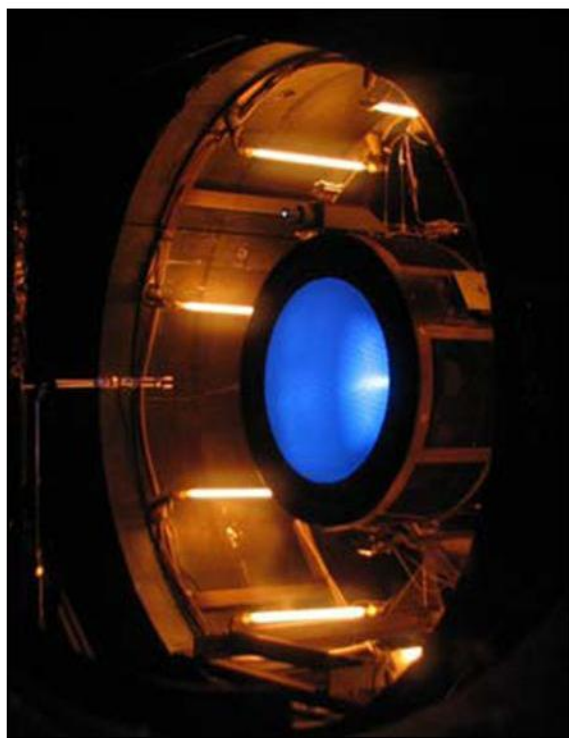


Figure 3 – NEXT PM1R Environmental Test.

The NEXT Engineering Model PPU was a modular design capable of very efficient operation through a wide voltage range because of innovative features like dual controls, module addressing, and a high current mode. The highly modular construction of the PPU resulted in improved manufacturability, simpler scalability, and lower cost relative to Dawn designs. The performance was measured in benchtop tests to range from 94.1 to 82.6% [17]. Other components under development include high voltage isolators, and heaters. The high-voltage isolator has been undergoing a life test to quantify leakage currents at full voltage to verify operation of this component over anticipated life. The leakage current after 10,000 hours of operation is about 1 nA, which is well below specifications. The cathode heaters for the NEXT thruster will also

undergo a series of acceptance tests and a cyclic life test to evaluate reliability [18].

A multi-thruster array test (MTAT) was beneficial to address thruster and gimbal-specific questions that drive the configuration of the IPS components as well as the configuration of the final multi-thruster system test to be executed at the completion of Phase 2 as shown in Figure 4. This MTAT utilized multiple engineering model (EM) NEXT ion thrusters as well as laboratory power consoles and laboratory propellant feed systems to operate multiple thrusters simultaneously. The engineering demonstration portion of MTAT [19] focused on the characterization of performance and behavior of the individual thrusters and the array as affected by the simultaneous operation of multiple ion thrusters. The MTAT physics effort focused on the characterization of the plasma environment generated by the simultaneous operation of multiple ion thrusters. The interaction of this plasma environment with the spacecraft and the thrusters themselves plays an important role in the determination of spacecraft configuration, acceptable array operating condition, and array lifetime. Recently published papers document ion beam characterization [20], array local plasma [21], electron flowfield characteristics of the plume [22], and neutralizer coupling characteristics [23].

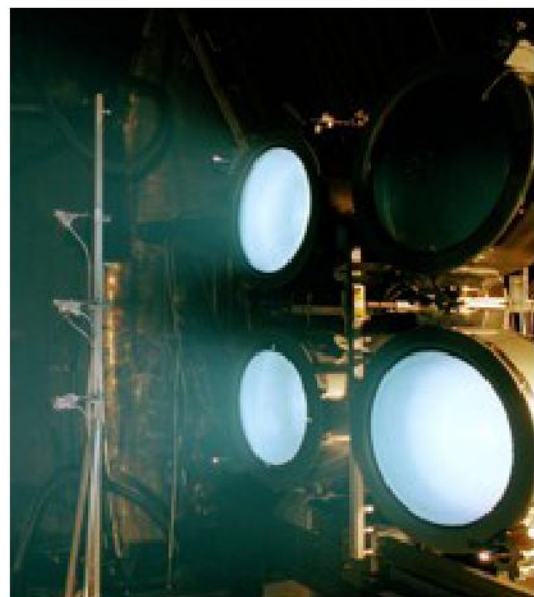


Figure 4 – NEXT Multi-Thruster Array Test.

Future Plans

NEXT project activities have brought next-generation ion propulsion technology to a mature state, with existing tasks completing the majority of the NEXT technology validation. Functional and qualification-level environmental tests of key system components are scheduled to be completed; the thruster life test should exceed the throughput demonstrated on the NSTAR thruster; and system integration tests with the most mature products will be completed in the coming months. Specifically the

functional and environmental tests of the EM PPU, the single-string integration test of the PM thruster, the EM power processing unit, and the EM propellant management system, the multi-thruster-string integration test, and continuation of the EM thruster life tests are anticipated

3. HIGH VOLTAGE HALL ACCELERATOR (HIVHAC) THRUSTER

Description

The recent focus of the HIVHAC thruster development task has been to develop a 3.5 kW Hall thruster with increased specific impulse, throttle-ability and lifetime to make Hall propulsion systems applicable to deep space science missions. The primary application focus for the resulting Hall propulsion system would be cost-capped missions. The project is led by NASA's GRC teamed with Aerojet, JPL and the University of Michigan. The needs of many targeted robotic science missions exceed the throughput capability achievable without advanced development. Two different approaches to increasing HIVHAC propellant throughput have been identified and are under development. These two different approaches offer parallel development paths referred to as the SOA approach and an advanced state-of-art (ASOA) approach. Each of these efforts is discussed below.

The SOA HIVHAC thruster development is a low risk approach to extending thruster lifetime by incorporating a number of design features previously proven to enhance thruster lifetime. The primary challenge of this approach is to ensure that discharge channel erosion is minimized sufficiently to ensure full power (3.5 kW) operation for a minimum of 7500 hours. This operational lifetime corresponds to a nominal propellant throughput of 150 kg. This throughput capability must be achieved at a discharge voltage of 700 Volts. The high voltage operation allows the thruster to operate at specific impulses much higher than conventional Hall thrusters. The high voltage also allows the thruster to operate at a much higher power density than conventional Hall thrusters. A comparison of the HIVHAC thruster to a conventional HET is shown in Table 2. A SOA prototype thruster designed to provide a 150 kg throughput has been fabricated and will be evaluated to confirm this capability.

Table 2. Performance Characteristics of HIVHAC vs. SOA Hall (SPT-100).

Characteristic	HIVHAC	SOA Hall
Thruster Power Range, kW	0.3-3.6	1.4
Throttle Ratio	12:1	1:1
Operating Voltage, V	200-700	300
Specific Impulse, sec	1000-2800	1450
Thrust, mN	24-150	79.8
Specific Mass, kg/kW	1.5	4
Propellant Throughput, kg	>300	150

The ASOA HIVHAC thruster development approach is a less traditional approach to extending thruster lifetime with the potential of enabling lifetimes in excess of 15,000 hours and throughputs in excess of 300 kg as shown in Figure 5. An ASOA laboratory-model thruster designed to provide a 300 kg throughput has been fabricated and under test to confirm this capability.



Figure 5 – ASOA HIVHAC thruster.

Recent Progress

Wear tests have focused on collecting experimental data to validate numerical simulation of the discharge channel erosion. Test priorities have focused on the wear test of the ASOA thruster to demonstrate throughput capabilities of the design. In wear tests the thruster discharge channel profile is measured by laser profilometry prior to thruster installation. The thruster is operated for a given test period and removed from the test chamber to measure changes to the discharge chamber profile. The thruster, shown in Figure 6, has been operated in excess of 4100 hours (88 kg of xenon throughput) as of November 30, 2007 and is on track to demonstrate the predicted xenon throughput. The ASOA thruster has demonstrated a throttle range of 12:1 and a maximum nominal power of 3.5 kW. At 3.5 kW the thruster has demonstrated a performance of 55% total efficiency and 2780 seconds total impulse, and a predicted lifetime exceeding 15,000 hours [24].



Figure 6 – HIVHAC Thruster installed for extended wear test.

Concurrent with the wear test activity is a hollow cathode development activity aimed at providing a hollow cathode that operates in spot mode with minimal propellant and power consumption while producing the required life. A variety of cathode configurations were built and evaluated. The variations included studying the effects of cathode orifice plate throat length, emitter inner diameter, keeper plate orifice diameter, and cathode-keeper gap on hollow cathode performance and operation. Results indicated that changes to the cathode-keeper gap had the most profound effect on stable cathode operating conditions [25].

Future Plans

Plans include the continued wear testing of the thruster configuration leading to the design, fabrication and build of an engineering model thruster that can provide predicted thruster performance across the anticipated environmental conditions.

4. ADVANCED XENON FEED SYSTEM

Description

An advanced xenon feed system task was funded to develop feed system components based on a novel diffusion bonding manufacturing technique. The task has been led by VACCO Industries and seeks to improve the reliability of ion propulsion feed systems while decreasing mass and volume over SOA (NEXT) xenon feed system technologies.

To improve reliability, the entire system is both series and parallel redundant as shown in Figure 7. An initial study of the reliability analyses completed at a component level has shown this configuration to have an expected lifetime approaching 30 years; exceeding all mission requirements. The mass of the proposed system is also substantial lower than SOA. The Flow Control Module (FCM) has a mass of 650 grams and the Pressure Control Module (PCM) has an estimated mass less than 600 grams. A three thruster system

has an estimated mass less than 3 kg or an 80% mass reduction over the SOA.

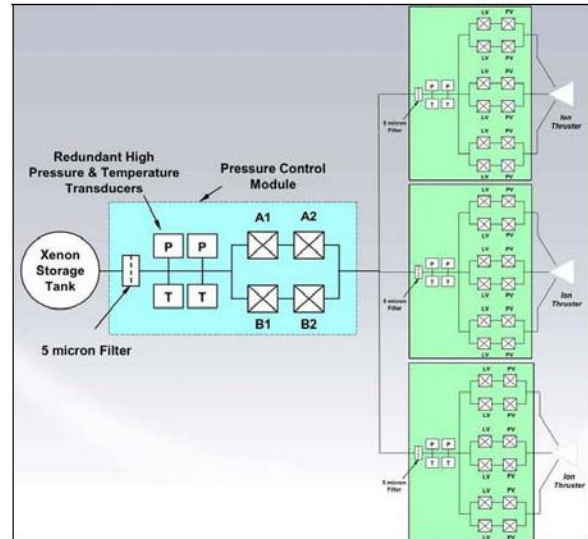


Figure 7 – Advanced Xenon Feed System Configuration.

Recent Progress

Following a user requirements definition study early in the base phase, the conceptual feed system architecture was changed from a digital fuel control array to an architecture that utilizes piezoelectrically actuated proportional micro valves to meet flow accuracies and reliability requirements while maintaining reduced mass and volume. VACCO has leveraged IR&D funds to develop the proportional micro valves. These valves along with latch valves and micro pressure and temperature sensors have been integrated into a diffusion-bonded Flow Control Module (FCM) as shown in Figure 8. Two FCMs have been delivered to NASA in June 2007 with one unit tested in anticipated relevant environmental conditions, such as thermal, vibration, and shock environments.



Figure 8 – Flow Control Module.

Future Plans

A follow-on contract was awarded to VACCO in August 2007. The present VACCO contract will focus on development of an Advanced Xenon Feed System (AXFS) controller, fabrication and testing of a Pressure Control Module (PCM), integrating the system with an FCM, and end-to-end system testing of these components with an ion thruster. Integrated tested is anticipated in 2008.

5. STANDARD ARCHITECTURE

Description

Standard Architecture is a design philosophy, which focused on reducing first user costs through a simplified thruster string design that provides required system redundancy by including one additional thruster string. In addition Standard Architecture promises to reduce non-recurring costs by investing in cross-platform design solutions to components such as the DCIU, PPU and feed systems, when it is applicable and beneficial to performance and cost.

Recent Progress

A study investigated several PPU designs for compatibility with multiple thruster designs. A comparison of engineering specifications to thruster operating parameters was completed. In addition the degree of difficulty to modify the various PPUs to operate thrusters of interest was assessed. The results of the study indicate that the NEXT PPU design was the best candidate for cross-platform operation based on demonstrated operation as well as ease of design modifications and cost effectiveness to achieve full compatibility with both NEXT and SOA ion thrusters.

Another cost savings approach investigated and pursued is the integration of the DCIU into the PPU of an ion propulsion system. The addition of one control card in the PPU eliminates the need for a separate box and the associated qualification costs. The practice is common in hall propulsion systems, but has not been adopted by the ion propulsion community to date.

Cross-platform design solutions are being investigated for the DCIU and feed system components. Simplifications to feed system design reflect the recent practices by industry, such as usage of high-pressure regulators in commercial xenon feed systems. A brassboard model DCIU is being designed to operate with the proposed feed system. The design will leverage Dawn heritage hardware and software.

Future Plans

The on-going tasks for the feed system and DCIU development will be completed by September 2008. The DCIU development task includes definition of requirements for performance and interfaces, design of hardware and

software, fabrication and testing of the brassboard DCIU and documentation. The feed system task includes development of requirements for performance and interfaces, hardware design, hardware assembly for testing and documentation. The results from these tasks will be available to all users for incorporation in future EM designs. The completion of these tasks will conclude all investments and activities in Standard Architecture due to the lack of sufficient resources.

6. CONCLUSIONS

Major hardware development tasks within the In-Space Propulsion Technology Project include NEXT Ion Propulsion System, HIVHAC Hall thruster, and VACCO xenon feed system. The NEXT system consists of a high-performance, 7-kW ion thruster; a high-efficiency, 7-kW power processor unit (PPU); a highly flexible advanced xenon propellant management system (PMS); a lightweight engine gimbal; and key elements of a digital control interface unit (DCIU) including software algorithms. NEXT project activities have brought next-generation ion propulsion technology to a mature state, with existing tasks completing the majority of the NEXT technology validation. Functional and qualification-level environmental tests of key system components are anticipated to be completed. The HIVHAC task is meeting its goals of advancing the Hall thruster technology readiness for science mission applications. The task seeks to increase specific impulse, throttle-ability and lifetime to make Hall propulsion systems applicable to deep space science missions. The HIVHAC thruster has demonstrated a throttle range of 12:1 and a maximum nominal power of 3.5 kW. At 3.5 kW the thruster has demonstrated a performance of 55% total efficiency and 2780 seconds total impulse, and a predicted lifetime exceeding 15,000 hours. An advanced xenon feed system task was funded in 2004 to develop feed system components based on a novel diffusion bonding manufacturing technique. The task has been led by VACCO Industries and seeks to improve the reliability of ion propulsion feed systems while decreasing mass and volume over SOA xenon feed system technologies. Standard Architecture tasks are developing cross-platform components and simplified designs to reduce first user costs and will be completed in FY08. Efforts under each of the development tasks focus on advancing technology readiness for flight infusion.

7. ACKNOWLEDGEMENTS

The author would like to acknowledge the support of the In-Space Propulsion Technology Project managed by the NASA Glenn Research Center for the Science Mission Directorate.

REFERENCES

- [1] NASA Science Plan 2007, http://science.hq.nasa.gov/strategy/Science_Plan_07.pdf
- [2] Kremic, T., Anderson, D., and Dankanich, J., "NASA's In-Space Propulsion Technology Project Overview and Mission Applicability", 2008 IEEE Aerospace Conference, IEEEAC Paper #1481, Big Sky, MT, March 2008.
- [3] Dankanich, J., "In-Space Propulsion Electric Propulsion Technologies Mission Benefits," 2008 IEEE Aerospace Conference, IEEEAC Paper #1480, Big Sky, MT, March 2008.
- [4] Rayman, M., Fraschetti, T., Raymond, C., and Russell, C., "Dawn: A Mission in Development for Exploration of Main Belt Asteroids Vesta and Ceres", 55th International Astronautical Congress, Paper #IAC-04-Q.5.05, Vancouver, Canada, October 2004.
- [5] Patterson, M. and Benson, S., "NEXT Ion Propulsion System Development Status and Performance", AIAA-2007-5199, 43rd AIAA/ASME/SAE/ASEE Joint Propulsion Conference and Exhibit, Cincinnati, OH, July 2007.
- [6] Benson, S., Riehl, J., Oleson, S., "NEXT Ion Propulsion System Configurations and Performance for Saturn System Exploration", AIAA-2007-5230, 43rd Joint Propulsion Conference, Cincinnati, OH, July 2007.
- [7] Benson, S. and Patterson, M., "Technology Readiness of the NEXT Ion Propulsion System", 2008 IEEE Aerospace Conference, IEEEAC Paper #1479, Big Sky, MT, March 2008.
- [8] Monheiser, J., Aadland, R. and Wilson, A., "Development of a Ground Based Digital Control Interface Unit (DCIU) for the NEXT Propulsion System," AIAA-2004-4112, 40th Joint Propulsion Conference, Fort Lauderdale, FL, July 2004.
- [9] Aadland, R., Monheiser, J., Driscoll, E., Wilson, F., Benson, S., "Development Status of NEXT Propellant Management System," AIAA-2004-3974, 40th Joint Propulsion Conference, Fort Lauderdale, FL, July 2004.
- [10] Herman, D., Soulas, G. and Patterson, M. "Performance Evaluation of the 40-cm NEXT Prototype Model Ion Thruster", AIAA-2007-5212, 43rd AIAA/ASME/SAE/ASEE Joint Propulsion Conference and Exhibit, Cincinnati, OH, July 2007.
- [11] Soulas, G., Patterson, M. Van Noord, J., "NEXT Ion Thruster Performance Dispersion Analyses", AIAA-2007-5213, 43rd AIAA/ASME/SAE/ASEE Joint Propulsion Conference and Exhibit, Cincinnati, OH, July 2007.
- [12] Van Noord, J. and Williams, G., "Lifetime Assessment of the NEXT Ion Thruster", AIAA-2007-5274, 43rd AIAA/ASME/SAE/ASEE Joint Propulsion Conference and Exhibit, Cincinnati, OH, July 2007.
- [13] Herman, D., Soulas, G., and Patterson, M., "Status of the NEXT Ion Thruster Long-Duration Test", AIAA-2007-5272, 43rd AIAA/ASME/SAE/ASEE Joint Propulsion Conference and Exhibit, Cincinnati, OH, July 2007.
- [14] Snyder J., Anderson, J., Soulas, G., Van Noord, J., "Environmental Testing of the NEXT PM1 Ion Engine", AIAA-2007-5275, 43rd AIAA/ASME/SAE/ASEE Joint Propulsion Conference and Exhibit, Cincinnati, OH, July 2007.
- [15] Anderson, J., Snyder, J., Van Noord, J., and Soulas, G., "Thermal Development Test of the NEXT PM1 Ion Engine", AIAA-2007-5217, 43rd AIAA/ASME/SAE/ASEE Joint Propulsion Conference and Exhibit, Cincinnati, OH, July 2007.
- [16] Van Noord, J., "NEXT Ion Thruster Thermal Model", AIAA-2007-5218, 43rd AIAA/ASME/SAE/ASEE Joint Propulsion Conference and Exhibit, Cincinnati, OH, July 2007.
- [17] Pinero, L., Todd, P. and Hopson, M. "Integration and Qualification of the NEXT Power Processing Unit", AIAA-2007-5214, 43rd AIAA/ASME/SAE/ASEE Joint Propulsion Conference and Exhibit, Cincinnati, OH, July 2007.
- [18] Pinero, L., Patterson, M., and Sovey, J., "NEXT Thruster Component Verification Testing" AIAA-2007-5276, 43rd AIAA/ASME/SAE/ASEE Joint Propulsion Conference and Exhibit, Cincinnati, OH, July 2007.
- [19] Patterson, M., Foster, J., McEwen, H., Pencil, E., Van Noord, J. and Herman, D., "NEXT Multi-Thruster Array Test - Engineering Demonstration," AIAA-2006-5180, 42nd Joint Propulsion Conference, Sacramento, CA, July 2006.
- [20] Pencil, E., Foster, J., Patterson, M., Van Noord, J., McEwen, H., Diaz, E., "Ion Beam Characterization of the NEXT Multi-Thruster Array Plume," AIAA-2006-5182, 42nd Joint Propulsion Conference, Sacramento, CA, July 2006.

- [21] McEwen, H., Foster, J., Pencil, E., Patterson, M., Diaz, E. and Van Noord, J., "Characterization of Plasma Flux Incident on a Multi-Thruster Array," AIAA-2006-5183, 42nd Joint Propulsion Conference, Sacramento, CA, July 2006.
- [22] Foster, J., Patterson, M., Pencil, E., McEwen, H., Diaz, E. and Van Noord, J., "Plasma Characteristics Measured in the Plume of a NEXT Multi-Thruster Array," AIAA-2006-5184, 42nd Joint Propulsion Conference, Sacramento, CA, July 2006.
- [23] Foster, J., Pencil, E., McEwen, H. Patterson, M., Diaz, E. and Van Noord, J., "Neutralizer Plasma Coupling in a NEXT Multi-Thruster Array," AIAA-2006-5184, 42nd Joint Propulsion Conference, Sacramento, CA, July 2006.
- [24] Peterson, P., Kamhawi, H., Manzella, D., and Jacobson, J., "Hall Thruster Technology for NASA Science Missions: HiVHAC Status Update", AIAA-2007-5236, 43rd AIAA/ASME/SAE/ASEE Joint Propulsion Conference and Exhibit, Cincinnati, OH, July 2007.
- [25] Kamhawi, H., "Various Hollow Cathode Configurations Testing for the High Voltage Hall Accelerator" AIAA-2007-5172, 43rd AIAA/ASME/SAE/ASEE Joint Propulsion Conference and Exhibit, Cincinnati, OH, July 2007.

BIOGRAPHY



Eric Pencil is the Acting Electric Propulsion Projects Manager for the In-Space Propulsion Technology Office at NASA Glenn Research Center. He is responsible for the management and execution of the electric propulsion development tasks for NASA Science missions. Previously he worked as a project/research engineer in the electric propulsion research group in which he worked on various electric propulsion technologies at varying stages of maturity from basic research to flight hardware.