

# An Examination of Emergency Vehicle Traffic Management and Control Systems



Sandip D. Satav, Poonam D Lambhate, Shailesh M Hambarde, Aparna S Hambarde, Aarti S Satav

**Abstract:** *Emergency response is crucial for keeping the public safe and ensuring the well-being of individuals in critical situations. The prompt and efficient deployment of emergency vehicles is necessary to minimize response times and reduce potential harm to people and property. This comprehensive survey paper explores various approaches, strategies, and technologies used to optimize traffic flow for emergency vehicles. It begins by emphasizing the importance of swift emergency vehicle response, particularly in medical emergencies and law enforcement. The paper then examines current methods for managing traffic and the challenges that hinder the timely movement of emergency vehicles, such as congestion, infrastructure limitations, and communication problems. Additionally, it presents case studies and real-world examples that demonstrate the effectiveness and challenges of different strategies for optimizing traffic flow. The survey also delves into the ethical considerations, privacy concerns, and societal impacts associated with prioritizing emergency vehicles.*

**Keywords:** *Machine Learning, Object Detection, Traffic Optimization*

## I. INTRODUCTION

In the modern world, the integration of machine learning is bringing about a significant transformation in transportation and emergency response systems. Machine learning, a powerful tool, is revolutionizing the way we handle emergency situations on our roads. This is crucial because it enables us to handle traffic more intelligently when emergency vehicles such as ambulances, fire trucks, or police cars need to swiftly reach people in critical conditions. Machine learning acts as the hero in this narrative, aiding emergency services in working faster and safer, thus enhancing their effectiveness in saving lives. As cities grow larger and traffic congestion becomes a common issue, employing machine learning is akin to having a brilliant

solution to the unique challenges faced by emergency responders. It is akin to equipping them with a superpower that ensures rapid response to emergencies, easy navigation through traffic, and optimal performance, ultimately promoting safety within our communities.

Therefore, efficient traffic management and control systems have become indispensable for maintaining the smooth flow of traffic. Emergency vehicles, such as ambulances, fire trucks, and law enforcement vehicles, are responsible for swiftly responding to life-threatening incidents. However, maneuvering through busy roads during emergencies can be difficult, and even small delays can have serious consequences for those in need.

To tackle these challenges and improve the safety and efficiency of emergency response operations, the development of a robust Traffic Management and Control System for Emergency Vehicles has become increasingly important. This innovative system combines advanced technology and real-time data integration with Machine Learning Algorithms to prioritize and expedite the movement of emergency vehicles while ensuring the safety of all road users. By equipping emergency vehicles with the ability to adjust traffic signals in advance and receive live traffic updates, this system empowers them to reach their destinations quickly and safely, potentially saving lives.

With this in mind, we will explore the key elements, advantages, and transformative impact of such a system on emergency services and public safety, highlighting its crucial role in addressing the challenges posed by urban congestion during critical situations. Life line that guarantees prompt support in times of greatest need.

## II. LITERATURESURVEY

The proposed solution for navigation involves utilizing data from vehicles and the road network. By analyzing vehicle-based traffic data, it becomes possible to identify and prioritize certain vehicles like ambulances and fire trucks. The road network data contains information about the roads that are suitable for these priority vehicles. To determine the most efficient emergency route based on the vehicle type, the proposed system combines the knowledge gained from studying the behaviors of different vehicle types with traffic data and road attributes. Machine learning techniques are employed to analyze and classify vehicle behavior using data gathered from vehicle tracking systems. This data includes the source ID, date, GPS coordinates, speed, and direction of each vehicle. By examining the acceleration behaviors, a matrix is created to differentiate between vehicle types. The model is trained using convolutional neural networks (CNN) with data from the vehicle tracking system, which is classified based on acceleration behaviors, and

Manuscript received on 11 October 2024 | First Revised Manuscript received on 19 December 2024 | Second Revised Manuscript received on 01 January 2025 | Manuscript Accepted on 15 January 2025 | Manuscript published on 30 January 2025.

\*Correspondence Author(s)

Dr. Sandip D. Satav\*, Associate Professor, SBI, Pune (Maharashtra), India. Email ID: [sandisatav593@gmail.com](mailto:sandisatav593@gmail.com)

Dr. Poonam D Lambhate, Professor, Department of Information Technology, Pune (Maharashtra), India. Email ID: [pnu\\_poonam@yahoo.co.in](mailto:pnu_poonam@yahoo.co.in)

Dr. Shailesh M Hambarde, Associate Professor, Department of Computer Engineering, Pune (Maharashtra), India. Email ID: [shaileshhambarde@gmail.com](mailto:shaileshhambarde@gmail.com)

Dr. Aparna S Hambarde, Assistant Professor, Department of Electronics & Telecommunication Engineering, JSPM's Jayawantrao Sawant College of Engineering, Pune (Maharashtra), India. Email ID: [head\\_compjscoe@jspmjscoe.edu.in](mailto:head_compjscoe@jspmjscoe.edu.in)

Mrs. Aarti S Satav, Manager, Department of Computer Engineering, KJ's COE, Pune (Maharashtra), India.

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an [open access](https://creativecommons.org/licenses/by-nc-nd/4.0/) article under the CC-BY-NC-ND license <http://creativecommons.org/licenses/by-nc-nd/4.0/>

vehicle-based traffic data is then generated [1].

The paper introduces a method for coordinating emergency vehicles in traffic. This method involves using visual sensing techniques to measure the distance between the vehicles and intersections, as well as counting the number of vehicles and transmitting time-sensitive alerts within a sensor network [2]. The distance between the emergency vehicle and the intersection is calculated using different techniques for comparison [3]. The paper also provides a detailed explanation of how visual sensing techniques are used to detect and count vehicles [4]. The information collected, such as vehicle count, distance, and speed, is valuable for efficiently managing emergency traffic at a traffic management center [5]. The authors propose a new protocol called PE-MAC, which aims to minimize broadcast delay for emergency messages by implementing a back off selection and contention window adjustment scheme [6].


This proposed algorithm is designed to classify emergency vehicles by utilizing a camera sensor to capture videos, converting them into images, and processing these images using various algorithms. The program will then determine whether the detected vehicle is an ambulance or not. Our approach can be integrated with CCTV systems to monitor emergency vehicles and give them priority in traffic, allowing them to pass through. Ensuring that emergency services are equipped to handle nighttime and inclement weather conditions is challenging but equally crucial for prompt response in adverse weather.

The objective of this paper is to examine the current advancements in smart traffic management for ambulances and explore potential areas for future research and development in this field. We propose the use of signal cameras and Arduino uno to detect emergency vehicles and transmit this information to the traffic signal control system, which can then adjust the traffic lights accordingly. When an emergency vehicle is identified as being stuck in traffic, the detection algorithm alerts the traffic signal, prompting it to change from red to green. For video analysis, we utilize existing CCTV systems already employed by the traffic department for monitoring traffic violations.

The proposed intelligent traffic management technique takes a comprehensive approach to effectively handle heavy traffic. It involves collecting data, implementing YOLO, extracting features, analyzing traffic flow, identifying traffic signs, predicting and alerting, and evaluating performance. Data collection is done using the YOLO algorithm, which also preprocesses traffic video footage. The algorithm tracks vehicles, labels them with relevant details, and generates bounding boxes. Feature extraction uses Alex Net to extract characteristics like size, color, and type from the YOLO output. Traffic flow analysis uses YOLO data to analyze movement and speed, identifying busy areas and predicting traffic conditions.

The paper presents a method in which the vehicles are sensed and processed through imaging techniques. This avoids the need of electronic sensors. A web camera is placed with the traffic light to capture image frames. The purpose of the proposed system is to reduce the congestion and to reduce the time taken for the system in the absence of vehicles on road. It take smore consideration for the vehicles timation by predicting the metal content of each vehicle. To automate

traffic signal system based on density estimation and emergency vehicle detection such as ambulance. The benefits of this new method include non-use of sensors or RFID tags which reduces the stress of traffic sergeants. MATLAB simulation reduces the production costs and helps to achieve high speed and accuracy. Further with improvements, this work can be extended to detect road accidents and to identify violations that occurs in the spiral car movements. (see Fig. 1) [7].

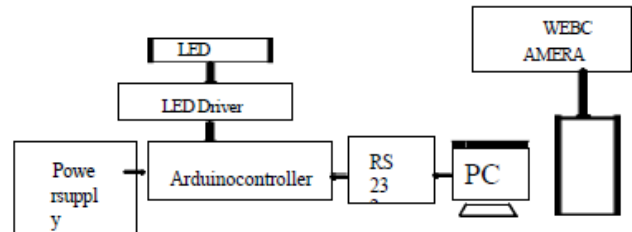

**[Fig.1: Working System [7]]**

The article refers to the use of Vehicle-to- Infrastructure technology to enhance Emergency Vehicle Traffic Signal Management systems. V2I technology allows for communication between vehicles and infrastructure such as traffic signals and can provide real time data on traffic conditions, signal timing, and the location and status of emergency vehicles. By utilizing this data, the system can prioritize emergency vehicles and adjust signal timing to provide green lights as needed, allowing emergency vehicles to navigate through traffic more quickly and safely. V2I technology also enables the communication between vehicles, allow in g emergency vehicles to coordinate with other vehicles and avoid collisions. It can create predictive models of traffic patterns, enabling the system to anticipate the movement of emergency vehicles and adjust signal timing accordingly. Overall, the use of V2I technology in the system can improve emergency response capabilities, reduce response times, and enhance safety for both emergency responders and other road users [8].

The ultrasonic sensor sense the obstacle i.e. vehicle in front of emergency vehicle it send a signal to the controller. The controller turns on the head light and sends information through lifi systems to the indicator of the next vehicle. Photo detector at the indicator receives the data and pass to the controller of that vehicle. The controller turn on the buzzer, that is present at the dashboard and turn on the headlight to transfer the information to the next vehicle through lifi. It continues until information reaches the first vehicle and transmits to the traffic signal system to turn on the green light and clear the path for emergency vehicles. The information like break apply, speed of the vehicle or any failure, damage in the vehicle etc can share through a lifi system. The patient information can be shared to the hospital through lifi communication. Traffic signal timer can be controlled dependent on number of vehicle present in front of the ambulance [9].

The paper proposes to use the Enhanced particle Swarm optimization for the traffic signal control. The optimization algorithm considers factors such as current queue length, recorded traffic flow, delay at each phase, and average waiting

time in each direction for output determination, which is to suggest the traffic right-of-way assignment for each traffic phase. The final goal for the simulation is to investigate the traffic flow response towards different traffic signal applied. The control algorithm applied in the intersections will be investigated by simulating the traffic inflow and outflow information. The simulation is performed in small scale with simple control mechanism, which the intersections correlated to each other but the flows between the intersections. The traffic network is simulated under fixed time signal control and algorithm, and enhanced particle swarm optimization algorithm respectively. Under the case of non-congested traffic, fixed time control can have better performance over particle swarm optimization algorithm as the latter is relatively unstable while unnecessary over-computation should be avoided. The proposed algorithms do not run under a fully congested condition where all directions are being congested. A fully congested network is abnormal condition where an expansion of infrastructure might be a better solution.

From the results, particle swarm optimization algorithms are more efficient in, dealing with high traffic flow as it reduces the queue length of the congested direction significantly, compared to that of fixed control. At the same time, it means more traffic can be handled and congestion can be relieved faster. All entries (four directions) at the junction with enhanced particle swarm optimization algorithm received more balance dal location of average waiting times, which are maintained under 500 seconds eventually [9].

The article implements the genetic algorithm for traffic flow control. Genetic algorithms' characteristic to evolve through generations of chromosomes and solution no choose the fittest optimum chromosomes that let it has the ability to self-optimizing from generation to generations. In this paper, the genetic algorithm is used in the traffic flow control to optimize the traffic flow within the intersection. The genetic algorithm is shown to be effective and capable to do the optimization of the traffic flow. The simulation is run for 600 seconds and the only difference is the incoming traffic flow is involved in the organization algorithm with the genetic algorithm in this simulation. The effects of various traffic characteristics are also being studied in this paper. As for queue length, which is also the total number of vehicles waiting at the intersection to be given the permission to be passed through, it is known as the performance indicator. Besides that, queue length also may bring some effects toward the traffic flow control, as the queue length may be too long and was unable to be released by the traffic flow control fast enough to ensure the smoothness of the traffic flow within the intersection [10].

This paper proposes a method in which Each vehicle can be installed with a RFID tag. This RFID tag would store all the information regarding the vehicle such as the vehicle number, etc. RFID tags can be used in identifying each vehicle uniquely and also help the driver to receive some traffic messages. The existing signaling system can be coupled with the RFID controller. Thus when a vehicle passes by a signal, the signal can automatically keep the count of the vehicles passing by it, and help in detection of traffic congestion. Each signal should be stored with a threshold value for which it should be red and green. Now depending

upon the frequency of the vehicles passing by the signal per second, the timer can be dynamically controlled. Each controller of the signal should be stored with a value of minimum frequency of the vehicles passing by the signal. As soon as this minimum frequency is reached, the controller should send a command to the signal to turn red. Thus the signal is controlled dynamically [12].

The first and primary element of this system is the wireless sensor nodes consisting of sensors. The sensors interact with the physical environment means vehicles presence or absence while the local server sends the sensors data to the central microcontroller. This system involves the 4\*2 array of sensor nodes in each way. This signifies 4 levels of Traffic and 2 lanes in each way. The sensors are ultrasonic sensors which transmits status based on presence of vehicle near it. The sensor nodes transmit at specified time intervals to the central microcontroller placed at every intersection.

The Microcontroller receives the signal and computes which road and which lane has to be chosen based on the density of Traffic. The computed data from Microcontroller is then transmitted to the local server through Wi-Fi connectivity. The controller makes use of the collected data to perform the Intelligent Traffic routing. In this system, the primary aim is to gather the information of moving vehicles based on WSN to provide them a clear path till their destinations and traffic signals should switch automatically to give a clear way for these vehicles [13]. The paper presents the proposed architecture for an ITMS inspired by the fused concepts of VANET and IoT that prioritizes the emergency vehicles on roads. The system firstly measures the gap between an intersection and the emergency vehicle, then dispatched EV from that particular intersection with the consideration that either the traffic signals are hacked or non-hacked, the type of incident and emergency car type. Every emergency vehicle has a unique identity that distinguishes it from the rest of the vehicles on the road. Once the information of emergency vehicles is obtained from sensors, it estimates the distance of emergency vehicles from an intersection and delivers access to the emergency vehicle on that particular road segment immediately. The RSU of the current intersection (RSU-A) informs the RSU of neighboring intersections (RSU-B) with the details of velocity of emergency car and number of vehicles which is moving towards the same intersection-B. On receipt of information from RSU-A, RSU-B will estimate its arrival time at the intersection-B. RSU-B will then regulate both the green light sequence and duration on the basis of expected time of arrival of the same and the received vehicle details from RSU-A [14].

The research proposes dynamic determination of greenlight duration at traffic intersections, continuous monitoring of emergency vehicle arrival at different lanes, and addressing deadlock and starvation conditions due to repeated emergency vehicle arrivals. The proposed algorithm operates in two stages. In the first stage, emergency vehicles are categorized based on standard policies, assigning priority values to each type of vehicle. The algorithm also considers the security level of emergency vehicles during dispatching, as verified by authorities. In these condstage, the algorithm



considers the distance of each emergency vehicle from the intersection point. Additionally, the system collaborates with a Code Messaging Service (CMS) and GPS-enabled mobile devices to further optimize emergency vehicle management. The methodology involves traffic volume detection, emergency vehicle presence check, and traffic phase selection based on the presence and priority of emergency vehicles. The algorithm also considers the direction and lane of emergency vehicle presence, as well as the maximum queue length of each phase at the intersection [15]. The approach involves the integration of computational modeling and numerical models to assess the impact of the proposed system on time factors and the overall on-road traffic scenario. Utilizing radio frequency identification, the system could effectively identify and prioritize emergency vehicles in real-time. The methodology explore incident management systems, employing intelligent traffic control to mitigatedelays and enhance the efficiency of emergency vehicle response.

The study incorporates microscopy to analyze the micro-level interactions and behaviors within the traffic flow. Validation involves comprehensive simulations or practical implementations to evaluate the effectiveness of the Smart Priority-Based Traffic Control System, emphasizing its impact on emergency vehicle prioritization and its implications for other on-road traffics [16]. This study outlines a methodology for the Detection and Prioritization of Emergency Vehicles within an Intelligent Traffic Management System (ITMS). The approach involves the deployment of real-time monitoring systems, utilizing sensors or cameras, for the identification of emergency vehicles in the traffic flow. Detection algorithms, which could include heuristic and prediction algorithms, are employed to enhance accuracy. Once identified, the methodology incorporates scheduling algorithms to prioritize the movement of emergency vehicles through junctions efficiently. The role of Roadside Units (RSUs) is employed in facilitating communication and coordination between the ITMS and emergency vehicles. The study delves into the impact of varying traffic densities on the effectiveness of the proposed system. Validation involves simulations or practical implementations to assess the efficiency of the Detection and Prioritization mechanism within the ITMS in improving emergency response times [17].

The paper proposes a system in which whenever ambulance reaches to the accident spot, first the ambulance driver will feed the patient's information in the android application. This information will be sent to the hospital's server for further processes. On the way whenever ambulance halts at the traffic signal, the ambulance driver will send emergency command along with direction from the android application to the server. Also the current GPS coordinates of ambulance is also sent to the server. At the server, depending upon the co-ordinates of the ambulance, the nearest signal is detected and the emergency command along with the direction is sent to that particular signal. Depending on the direction received from the server that particular signal is made green. The system is divided into two modules. First module is a software module which consists of android application. Second module is the hardware module of traffic signal implementation [18].

This paper uses a narrative literature review approach to compare and summarize on the existing techniques of traffic control system in the literature. The narrative literature review approach aims to discuss the state of a specific topic or theme from a theoretical and contextual point of view. This paper analysed the selected studies based on the following criteria: a) Techniques used to control traffic routing decisions. b) Traffic data collection methods to manage the routing decisions. c) Number and types of variables use to support the routing and signal decisions. The design for this system is divided in three systems. Firstly, is fitted in an emergency vehicle and know nasan Emergency Vehicles System (EVS). Secondly, is fitted at traffic light junction and known as Traffic Junction System (TJS). Lastly, known as Base Station System (BSS) [19].

This study proposes a Traffic Control System catering to emergency vehicles, integrating RFID and sensor technologies. It involves deploying RFID tags on emergency vehicles, enabling seamless identification and communication with the traffic control system. Ultrasonic sensors contribute to real-time data collection, assessing the dynamic road environment and detecting the proximity of emergency vehicles. The system utilizes acoustics and object recognition techniques for enhanced accuracy. The approach aims to facilitate efficient traffic management by prioritizing emergency vehicles through automated responses triggered by RFID and sensor inputs [20]. The study proposes an algorithm for traffic management, prioritizing emergency vehicles, particularly in the context of smart cities. This involves a cloud-based control center leveraging Internet of Things (IoT) technologies. Tracking and navigation systems are integrated, utilizing real-time data collection. Image processing aids in recognizing emergency vehicles and assessing dynamic road conditions. The algorithm dynamically adjusts traffic flow, granting priority to emergency vehicles for swift navigation [21]. The solution centers on employing a Convolutional Neural Network (CNN) for intelligent traffic management during emergency scenarios. Initialstagesinvolve defining the problem, collecting relevant datasets, and preprocessing data for CNN training. The designed CNN architecture is then trained using labeled examples, validated for generalization, and tested for performance metrics. Integration with a Traffic Management Center (TMC) allows real-time communication to influence traffic components. Implementation involves IoT Raspberry-Pi devices. Performance evaluation assesses the system's impact on response time, emergency vehicle efficiency, and traffic delays [22].

This research employs an optimization-centric methodology for enhancing emergency response in smart cities. Initial steps involve modeling an Emergency Management System (EMS) considering real-time factors and resource constraints. The study integrates IoT technology to facilitate communication and coordination among emergency vehicles and traffic lights. An optimization algorithm is proposed for dispatching emergency vehicles efficiently and dynamically adjusting traffic lights to expedite the irmovement. The model is validated through simulations, considering diverse emergency scenarios. The

approach aims to minimize response delays by strategically managing resources, highlighting a systematic optimization frame work for improved emergency management in the context of smart cities [23]. This solution focuses on a comprehensive approach, encompassing the development of V2V and V2I communication protocols with robust security controls, aiming to prevent emergency service misuse. Configurability is a key consideration, allowing adaptation to diverse emergency levels. Utilizing the iTETRIS simulation platform integrates ns-3 and SUMO for evaluating architecture effective ness. This includes assessing dissemination delay and scalability via SUMO's mobility scenarios. Alternative data sources like faulty sensors prompt exploration of a mobile sensing approach for opportunistic data collection. Investigating sociotechnical adaptation scenarios involves aligning system and driver actions for maximum benefit.

Additionally, this study explores optimization techniques and AI search algorithms for an effective decision-making mechanism, considering real-time factors and security constraints [24]. The paper presents an idea for traffic signal control in which a special camera was used to monitor the intersection in real-time. The camera output was a stream of video frames with a framerate of 30 frames per second. The length of the road within the camera view was 15 meters. Video frames were binarized by using a background model with a threshold to detect and track all objects (vehicles). Region growing segmentation was used to segment the images and thus to count the vehicles and their bounding boxes. Variance and slab algorithms were used to process the data in order to calculate the time of the green signal. Computing the length of a cycle requires understanding the intervals of that cycle [25].

The study introduces a solution for mitigating traffic congestion through an adaptive traffic signal control system designed for resource-constrained environments. The study formulates a cost function, considering factors such as real-time conditions, law enforcement requirements, and urban characteristics. Emphasis is placed on responsiveness to emergency vehicles, aiming to minimize delays during critical situations. The proposed system integrates green technologies and optimizes resource allocation, aligning with environmental considerations [26]. This model presents a novel intelligent traffic recovery model tailored for emergency vehicles, employing a context-aware reinforcement learning approach. The methodology involves the formulation and implementation of an algorithm that utilizes reinforcement learning techniques and adapts to contextual information in real-time. The model is designed to dynamically learn and optimize traffic recovery strategies based on the unique context of emergency situations. Key steps in the methodology include defining the context-aware reinforcement learning model, training the system through interactions with its environment, and assessing its performance in recovering traffic conditions for emergency vehicles. Validation encompasses simulations or practical implementations to evaluate the model's adaptability and effectiveness, emphasizing its potential to provide intelligent and context-aware traffic recovery solutions for emergency services [27].

The study considers the optimization of the road structure

to create virtual lanes for emergency vehicles, allowing them to travel at faster speeds and with special privileges such as overtaking from the opposite side. Additionally, the study focuses on optimizing traffic lights to create a visible green corridor where traffic is not heavy at the point from which the emergency vehicle is moving. The research involves simulation using SUMO (Simulation of Urban Mobility) to test the effectiveness of the proposed solution. The simulation consists of three parts: map (grid of roads), routes (several vehicles with different random routes), and traffic lights. The simulation involves the random selection of 500 vehicles for a period of 1500 time units with random trips, and the time taken to complete these trips is measured.

The study includes simulations to test the effect of traffic on vehicles when there are no special priority privileges, as well as simulations to compare the performance of emergency vehicles with and without route optimization and special access privileges. The results of the simulations are used to evaluate the effectiveness of the proposed solution in reducing time loss for emergency vehicles and its impact on the overall traffic flow [28]. This paper aims to detect and track vehicles on a video stream and count those vehicles going across a predefined line. By using the count of vehicles on each side of the traffic light, we have optimized the traffic lights by assigning them time according to the traffic behavior in real-time. If we have less traffic or there is more traffic than usual, our model will optimize the light by increasing or decreasing the duration of the light. We have used YOLO and SORT algorithms on the live video feed to get the vehicle count in real-time. The capacity to anticipate traffic scenarios is significant for ideal management. For instance, if it is known that we would realize that some street will wind up clogged after some time, this data could be transmitted to street clients that can go around this street, consequently enabling the entire framework to diminish from blockage. Even for single intersections, there may be no optimum ideal arrangement.

With various intersections, the issue turns out to be significantly increasingly mind-boggling, as the condition of one light impacts the progression of traffic towards numerous different lights [29]. The paper discusses the establishment of a traffic light regulation system on Sultan Agung Street and surrounding areas where the traffic lights are connected to each other using fuzzy logic controller. Determine the system input and output, and the universe of each variable. In this study three input variables were used, namely the number of cars, number of motorcycles and queue length (m), while the output variable was the duration of the green light on (seconds). Determine the number of fuzzy sets in each input and output and membership functions [30]. Each input variable will be defined as 3 fuzzy sets, while output variables are 5 fuzzy sets with trapezoid and triangle membership functions. Establish rules or fuzzy rules and determine the composition of the system rules (system inference). The system inference used is Max Min [32]. The defuzzification process using the centroid method. The decision of the duration of the green light is the result of defuzzification [33]. After the green light is on, there is a clear time for 5 seconds before the red light is on. The clear time is the time

interval given to wait for a clean intersection of the vehicle [34].

### III. RELATED WORK

Identify the specific region or city where the project will be implemented. Define the problem statement, including key challenges in traffic flow for emergency vehicles. Set clear objectives and goals for the project, such as reducing response times and improving public safety. Gather historical traffic data, including congestion patterns, traffic signal timings, and emergency vehicle response data. Analyze traffic data to identify areas with frequent congestion and delay in emergency vehicle movements. Survey and assess existing traffic management systems, signal preemption systems, and routing algorithms used in the selected region.

Evaluate their effectiveness in prioritizing emergency vehicles. Assess available technologies and tools for traffic flow optimization, such as traffic signal preemption systems, GPS-based navigation, and vehicle-to-infrastructure communication. Select appropriate technologies based on cost, compatibility, and effectiveness. Develop or customize software and hardware solutions as required. Conduct extensive testing and simulations to ensure the effectiveness of the chosen technologies and algorithms.

Algorithms used:

#### A. For object Detection

##### i. Region-Based Convolutional Neural Networks (R-CNN)

Region-based convolutional neural networks improve object detection by extracting essential features using selective search algorithms. This can be used for image analysis of vehicle detection. Ross Girshick in 2013 proposed an architecture called R-CNN to deal with the current challenge of object detection. This R-CNN architecture uses the selective search algorithm that generates approximately 2000 region proposals. These region proposals are then provided to CNN architecture that computes CNN features. These features are then passed in an SVM model to classify the object present in the region proposal. An extra step is to perform a bounding box regressor to localize the objects present in the image more precisely. Region proposals are simply the smaller regions of the image that possibly contains the objects we are searching for in the input image. To reduce the region proposals in the R-CNN uses a greedy algorithm called selective search.

Selective search is a greedy algorithm that combines smaller generated regions to generate region proposals. This algorithm takes an image as input and output generates region proposals on it. This algorithm has the advantage over and on proposal generation in that it limits the number of proposals to approximately 2000 and these have a high recall.

##### ii. Faster R-CNN

The R-CNN model, while effective for object detection, faced issues with speed. Fast R-CNN was introduced to address these issues, passing the entire image through a pre-trained Convolutional Neural Network. This method uses region of interest pooling to create a fully connected layer with an output. This improvement is discussed in the Faster R-CNN network. The main performance bottleneck of an RCNN lies in the independent CNN forward propagation for

each region proposal, without sharing computation. Since these regions usually have overlaps, independent feature extractions lead to much repeated computation. One of the major improvements of the fast RCNN from the R-CNN is that the CNN forward propagation is only performed on the entire image. Compared with the R-CNN, in the fast R-CNN the input of the CNN for feature extraction is the entire image, rather than individual region proposals. Moreover, this CNN is trainable. Given an input image, let the shape of the CNN output be

$$1 * c * h1 * w1$$

Suppose that selective search generates n region proposals. These mark regions of interest on the CNN output. Then these regions of interest further extract features of the same shape in order to be easily concatenated. To achieve this, the fast R-CNN introduces the region of interest pooling layer: the CNN output and region proposals are input into this layer, outputting concatenated features of shape n \* c \* h2 \* w2 that are further extracted for all the region proposals. Using a fully connected layer, transform the concatenated features into an output of shape n \* d where d depends on the model design. Predict the class and bounding box for each of the n region proposals. More concretely, in class and bounding box prediction, transform the fully connected layer output into an output of shape n \* q (q is the number of classes) and an output of shape n \* 4, respectively. The class prediction uses soft maxregression.


##### iii. YOLO (You Only Look Once)

It is a popular object detection model architecture, often found on Google searches. It uses a top-notch neural network archetype for high accuracy and processing speed, making it a popular choice for object detection. The architecture takes an image as input and resizes it to 448\*448 by keeping the aspect ratio same and performing padding. This image is then passed in the CNN network. This model has 24 convolution layers, 4 max-pooling layers followed by 2 fully connected layers. For the reduction of the number of layers, we use 1\*1 convolution that is followed by 3\*3 convolution. Notice that the last layer of YOLOv1 predicts cuboidal output. The loss function defined in YOLO is given as:

$$\begin{aligned} \lambda_{\text{coord}} \sum_{i=0}^{S^2} \sum_{j=0}^B \mathbb{1}_{i,j}^{\text{obj}} [(x_i - \hat{x}_i)^2 + (y_i - \hat{y}_i)^2] \\ + \lambda_{\text{coord}} \sum_{i=0}^{S^2} \sum_{j=0}^B \mathbb{1}_{i,j}^{\text{obj}} [(\sqrt{w_i} - \sqrt{\hat{w}_i})^2 + (\sqrt{h_i} - \sqrt{\hat{h}_i})^2] \\ + \sum_{i=0}^{S^2} \sum_{j=0}^B \mathbb{1}_{i,j}^{\text{obj}} (C_i - \hat{C}_i)^2 \\ + \lambda_{\text{noobj}} \sum_{i=0}^{S^2} \sum_{j=0}^B \mathbb{1}_{i,j}^{\text{noobj}} (C_i - \hat{C}_i)^2 \\ + \sum_{i=0}^{S^2} \mathbb{1}_i^{\text{obj}} \sum_{c \in \text{classes}} (p_i(c) - \hat{p}_i(c))^2 \end{aligned}$$

[Fig.2: Loss Function for you only Look once Algorithm [31]]

The first two parts of the above loss equation represent localization mean-squared error, but the other three parts represent classification error. In the localization error, the first term calculates the deviation from the ground truth bounding box. The second term calculates the square root of the difference between height and width of the bounding box. In the second term, we take the square root of width





and height because our loss function should be able to consider the deviation in terms of the size of the bounding box.

For small bounding boxes, the little deviation should be more important as compared to large bounding boxes. There are three terms in classification loss, the first term calculates the sum-squared error between the predicted confidence score that whether the object present or not and the ground truth for each bounding box in each cell. Similarly, The second term calculates the mean-squared sum of cells that do not contain any bounding box, and a regularization parameter is used to make this loss small. The third term calculates the sum-squared error of the classes belongs to these grid cells.

**B. Classification**

This is used to distinguish emergency vehicles. The Particle Swarm Optimization (PSO) algorithm is a powerful meta-heuristic optimization algorithm and computational technique inspired by the collective behavior of natural organisms, such as birds or fish, that move together to achieve a common goal. In PSO, a group of particles (representing potential solutions) navigates through a problem’s solution space to find the best possible solution. Each particle adjusts its position based on its own best-known solution (personal best) and the best solution discovered by the entire group (global best). This collaborative movement enables particles to converge toward optimal solutions over iterations. PSO is widely used for optimization problems in various fields, leveraging the power of collective intelligence to explore complex solution spaces and find optimal outcomes efficiently.

**IV. METHODOLOGY**

The propose work involves real time object detection from the on-going traffic using the in built camera system of the traffic signals through video capturing and then image processing. After an emergency vehicle is detected, priority will be given to minimize the waiting time of emergency vehicles by traffic flow optimization algorithms. Subsequently coordinate with the adjacent traffic signals. In absence of an emergency vehicle e dynamic traffic signal duration will take place for minimum congestion at traffic signals. Below is the analysis of various algorithms that might beuseful and for object detection.

**A. Implementation Details**

You Only Look Once (YOLO) is a state-of-the-art object detection algorithm renowned for its efficiency and accuracy. YOLO approaches object detection as a single regression problem, directly predicting bounding boxes and class probabilities from full images in one evaluation. The architecture of YOLO consists of convolution allayers followed by fully connected layers, allowing it to make predictions across multiple spatial scales simultaneously. A bounding box is a rectangular frame that encloses the detected object within an image. In YOLO, each bounding box prediction consists of four parameters: (1) the coordinates of the bounding box’s top-leftcorner (x,y),(2) the width(w),and (3) the height (h). Additionally, each bounding box predictionis associated with a confidence score, representing the model’s confidence in the detection, as well as class

probabilities indicating the likelihood of each class present within the bounding box. The screenshots provided below showcase the bounding box outputs generated by the trained YOLO model during inference. Each screenshot depicts an input image overlaid with bounding boxes drawn around detected emergency vehicles, along with their associated confidence scores. These visual representations serve to illustrate the effectiveness of the YOLO algorithm in accurately identifying emergency vehicles within complex scenes.




[Fig.3: Bounding Box use Din YOLOv5]

The graphs you sent me show the results of training a YOLOv5 object detection model to detect emergency vehicles. The graphs show various metrics and losses over the course of the training process.

- *train/box, train/cls, train/df1*: These graphs show the training loss for different parts of the model. They are likely the bounding box loss, classification loss, and DFL loss, though the specific details may depend on the implementation.
- *metrics/precision(B), metrics/recall (B)*: These graphs show the precision and recall for the model on the training set. Precision is the ratio of true positives to the total number of positive predictions, while recall is the ratio of true positives to the total number of actual positives.
- *val/box\_loss, val/cls\_loss, val/df1\_loss*: These graphs show the validation loss for the different parts of the model, similar to the training loss graphs above.
- *metrics/mAP50 (B), metrics/mAP50-95 (B)*: These graphs show the mean Average Precision (mAP) at different Inter section over Union (IoU) thresholds. These are common metrics used to evaluate object detection models.

The horizontal axis of each graph represents the training steps, while the vertical axis represents the value of the metric or loss.

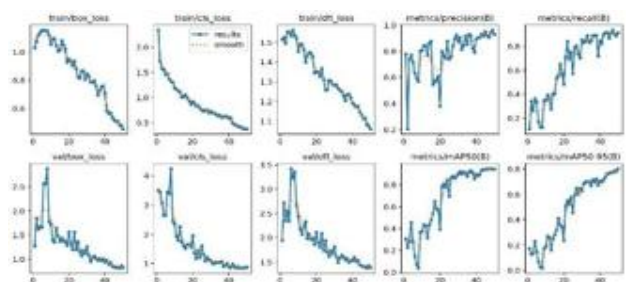


[Fig.4: Results of Model Training]



V. RESULTS

Confusion Matrix, which is a table that shows the performance of an algorithm at classifying data points. In this case, the rows represent the actual classes(ambulance, fire truck, background), and the columns represent the predicted classes. Each cell of the matrix shows the number of data points that were predicted to belong to a certain class, but actually belonged to another class.

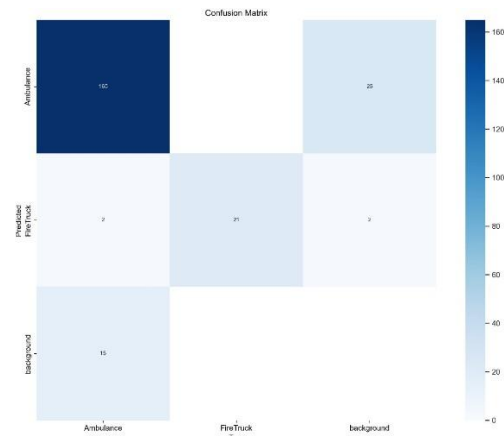

[Fig.5: Confusion Matrix Produce Das a Result]

YOLOv5 is used to identify emergency vehicles from images captured in CCTV camera at traffic signals. Our tweaked model has achieved an accuracy of more than 90% in identifying emergency vehicles.



[Fig.6: Prediction using YOLOv5]

VI. CONCLUSION

To summarize, the integration of machine learning into emergency vehicle traffic optimization marks a significant advancement in our ability to effectively respond to urgent situations. By using real-time data and advanced algorithms, machine learning has proven its ability to streamline emergency response procedures, decrease response times, and ultimately enhance public safety. By offering intelligent traffic management solutions, it allows emergency vehicles to navigate congested roads more efficiently, ensuring prompt arrival at their destination. Additionally, the potential to anticipate and prevent traffic issues during emergencies can save crucial minutes, which can be the difference between life and death. As we continue to develop these technologies, it is evident that machine learning holds great potential in transforming emergency services, creating safer and more resilient cities in the face of unexpected challenges.

DECLARATION STATEMENT

After aggregating input from all authors, I must verify the accuracy of the following information as the article's author.

- **Conflicts of Interest/ Competing Interests:** Based on my understanding, this article has no conflicts of interest.
- **Funding Support:** This article has not been sponsored or funded by any organization or agency. The independence of this research is a crucial factor in affirming its impartiality, as it has been conducted without any external sway.
- **Ethical Approval and Consent to Participate:** The data provided in this article is exempt from the requirement for ethical approval or participant consent.
- **Data Access Statement and Material Availability:** The adequate resources of this article are publicly accessible.
- **Authors Contributions:** The authorship of this article is contributed equally to all participating individuals.

REFERENCES

1. Ozcan-Tatar, Ceren, Ezgi Tukul, Emrah Yilmaz, Saye Cabuk, and Gurkan Ozturk. "Routing and Navigation Solutions for Emergency Vehicles in Urban Emergency Management." Resourceedings 3, no. 1(2023): 75-80. DOI: <https://doi.org/10.21625/resourceedings.v3i1.946>
2. Diksha A. Chaudhari, Lakxmi S. Gadhari, Gaurav H. Damale, Abhijit R. Dutonde, Prof Himanshu Joshi, "A survey on traffic control mechanism for emergency vehicles", in International Journal of Engineering Research and Technology, (2020). DOI: <https://doi.org/10.17577/IJERTV9IS060832>
3. Nellore, Kapileswar, and Gerhard P. Hancke. "Traffic management for emergency vehicle priority base don visual sensing." Sensors 16, no. 11(2016): 1892. DOI: <https://doi.org/10.3390/s16111892>
4. Praveen Bharathi, Gopi Krishnan, Alexander A ruldos, Advait Sajeevan, Hrishikesh and Dr Jayanthi Kannan, "Emergency Vehicle Classification System", in IJIRCCCE, (2023). [https://www.researchgate.net/profile/Mkjayanthi-Kannan/publication/371303523\\_Emergency\\_Vehicle\\_Classification\\_System/links/647ddc0079a72237651353bf/Emergency-Vehicle-Classification-System.pdf](https://www.researchgate.net/profile/Mkjayanthi-Kannan/publication/371303523_Emergency_Vehicle_Classification_System/links/647ddc0079a72237651353bf/Emergency-Vehicle-Classification-System.pdf)
5. Sunil M, V Yashaswini naidu, Vignesh R, Vishwas P, and Amitha S, "Smart Traffic Management for ambulance" in International research journal of Moder nization in Engineering Technology and Science, (2023). DOI: <https://www.doi.org/10.56726/IRJMETS32112>
6. Zhang Lei and Shi Y igong, "Intelligent traffic system using machine learning technique: A Review", in International Journal of research publication and reviews, (2023). DOI: <https://doi.org/10.55248/gengpi.234.5.38047>
7. Vani, R., N. Thendral, J. C. Kavitha, and N. P. G. Bhavani. "Intelligent traffic control system with priority to emergency vehicles." In IOP Conference Series: Materials Science and Engineering, vol.455, no.1, p.012023. IOP Publishing,(2018). DOI: <https://doi.org/10.1088/1757-899X/455/1/012023>
8. Kumar, JNVR Swarup, MN Vamsi Thalamat, IS Siva Rao, Pintu Kumar Ram, Modepalli Vignesh and Peramanoj, "A real time V2I based Emergency Vehicle Traffic Signals Management System (EVTMS)." In2023 14<sup>th</sup> International Conference on Computing Communication and networking Technologies (ICCNT),pp. 1-6. IEEE, (2023). DOI: <https://doi.org/10.1109/ICCNT56998.2023.10307226>
9. Shivaprasad K S, Shruthi S, Chandana R Nayaka, Arun Y K, Asha A ,"Advanced Traffic control system for emergency vehicle "inin International Journal of Engineering Research and Technology, (2028). <https://www.ijert.org/advanced-traffic-control-system-for-emergency-vehicle>
10. Chuo, Helen Sin Ee, Min Keng Tan, Alex Chee Hoe Chong, Renee Ka Yin Chin, and Kenneth Tze Kin Teo. "Evolvable traffic signal control for intersection congestionalleviati on with enhanced particle swarm optimisation." In 2017 IEEE 2nd International Conference on Automatic Control and Intelligent Systems (I2CACIS), pp. 92-97. IEEE, (2017). DOI: <https://doi.org/10.1109/I2CACIS.2017.8239039>
11. Teo, Kenneth Tze Kin, Wei Yeang Kow, and Y.K. Chin. "Optimization of traffic flow with in an urban traffic light intersection with genetic algorithm." In 2010 Second International Conference on Computational Intelligence,





- Modelling and Simulation, pp. 172-177. IEEE, (2010). DOI: <https://doi.org/10.1109/CIMSIM.2010.95>
12. Lanke, Ninad, and Sheetal Koul. "Smart traffic management system." International Journal of Computer Applications 75, no. 7(2013)." DOI: <https://doi.org/10.5120/13123-0473>
  13. Prasad, R. D. Himanshu Yadav, S Kumar, A. Pandey and A. Yadav," Smart Traffic Monitoring and Controlling." Journal of Emerging Technologies and Innovative Research, no.6 (2021):744-748. <https://www.jetir.org/view?paper=JETIR2106803>
  14. Sumi, Lucy, and Virender Ranga. "Intelligent traffic management system for prioritizing emergency vehicles in a smart city." International Journal of Engineering 31, no. 2 (2018): 278-283." [https://www.ije.ir/article/73118\\_56f9e3f8e7c5524184836f0b6cab2d25.pdf](https://www.ije.ir/article/73118_56f9e3f8e7c5524184836f0b6cab2d25.pdf)
  15. Chakraborty, Partha Sarathi Arti Tiwari and Pranshu Raj Sinha, "Adaptive and optimized emergency vehicle dispatching algorithm for intelligent traffic management system." Procedia Computer Science 57 (2015): 1384-1393. DOI: <https://doi.org/10.1016/j.procs.2015.07.454>
  16. Choudhury, Krishnendu, and Dalia Nandi." Detection and Prioritization of Emergency Vehicles in Intelligent Traffic Management System." In 2021 IEEE Bombay Section Signature Conference (IBSSC), pp. 1-6. IEEE, 2021. DOI: <https://doi.org/10.1109/IBSSC53889.2021.9673211>
  17. Karmakar, Gour, Abdullahi Chowdhury, Joarder Kamruzzaman, and Iqbal Gondal." A smart priority-based traffic control system for emergency vehicles." IEEE Sensors Journal 21, no. 14 (2020): 15849-15858. DOI: <https://doi.org/10.1109/JSEN.2020.3023149>
  18. Ahir, Deepali, Saurabh Bharade, Pradnya Botre, Sayali Nagane, and Mihir Shah. "Intelligent traffic control system for smart ambulance." IRJET5(2018):355-358. <https://www.irjet.net/archives/V5/i6/IRJET-V5I675.pdf>
  19. bin Wan Hussain, Wan Mohd hafiz, Marshima Mohd Rosli and Rosmawati Nordin "Review of traffic control techniques for emergency vehicles." Indonesian Journal of Electrical Engineering and Computer Science 13, no.3 (2019):1243-1251. DOI: <https://doi.org/10.11591/ijeecs.v13.i3.pp1243-1251>
  20. Jagadeesh, Vaddi, Thum kunta Lokeshwar Reddy, and G. Sundari. "Traffic Control System for Emergency Vehicles using RFID and Sensors." In 2023 7th International Conference on Intelligent Computing and Control Systems (ICICCS), pp. 1739-1744. IEEE, 2023. DOI: <https://doi.org/10.1109/ICICCS56967.2023.10142622>
  21. Paunova-Hubenova, E., and E. Trichkova-Kashamova. "Algorithm for traffic management with priority for emergency vehicles." In 2022 XXXI International Scientific Conference Electronics (ET), pp.1-5. IEEE, 2022. DOI: <https://doi.org/10.1109/ET55967.2022.9920275>
  22. Deepajothi, S., D. Palanival Rajan, P. Karthikeyan, and S. Velliangiri. "Intelligent traffic management for emergency vehicles using convolutional neural network." In 2021 7th International Conference on Advanced Computing and Communication Systems (ICACCS), vol. 1, pp. 853-857. IEEE, 2021. Li, Xinke and Mo, Haofan and Liu, Feng, A Robust Video Stabilization Method for Mobile Devices. DOI: <https://doi.org/10.1109/ICACCS51430.2021.9441929>
  23. Rangel, Elivelton O., Daniel G. Costa, and Maycon ML Peixoto. "An optimization approach for emergency vehicles dispatching and traffic lights adjustments in response to emergencies in smart cities." In 2021 XI Brazilian symposium on computing systems engineering (SBESC), pp. 1-8. IEEE, 2021. DOI: <https://doi.org/10.1109/SBESC53686.2021.9628243>
  24. Djahel, Soufiene, Mazeiar Salehie, Irina Tal, and Pooyan Jamshidi. "Adaptive traffic management for secure and efficient emergency services in smart cities." In 2013 IEEE International Conference on Pervasive Computing and Communications Workshops (PERCOM Workshops), pp. 340-343. IEEE, 2013. DOI: <https://doi.org/10.1109/PerComW.2013.6529511>
  25. Almuhanna, Raid RA, and Shahed A. Salman. "Real-Time Traffic Flow Control at Signalized Intersections: A Case Study of the Said-Jawda intersection in Karbala." In IOP Conference Series: Materials Science and Engineering, vol. 1067, no. 1, p. 012067. IOP Publishing, 2021. DOI: <https://doi.org/10.1088/1757-899X/1067/1/012067>
  26. Bapodara, Sagar, Shyam Mesvani, Manish Chaturvedi, and Pruthvish Rajput. "Traffic Congestion and Emergency Vehicle Responsive Traffic Signal Control in Resource Constrained Environment." In 2023 11th International Symposium on Electronic Systems Devices and Computing (ESDC), vol.1, pp. 1-6. IEEE, 2023. DOI: <https://doi.org/10.1109/ESDC56251.2023.10149873>
  27. Kiani, Farzad, and Ömer Faruk Saraç. "A novel intelligent traffic recovery model for emergency vehicles based on context-aware reinforcement learning." Information Sciences 619 (2023): 288-309. DOI: <https://doi.org/10.1016/j.ins.2022.11.057>
  28. Yadav, Shalini, and Rahul Rishi. "Algorithm for Creating Optimized Green Corridor for Emergency Vehicles with Minimum Possible Disturbance in Traffic." LOGI-Scientific Journal on Transport and Logistics 13, no. 1 (2022): 84-95. DOI: <https://doi.org/10.2478/logi-2022-0008>
  29. Sharma, Moolch and, Ananya Bansal, Vaibhav Kashyap, Pramod Goyal, and Tariq Hussain Sheikh. "Intelligent traffic light control system based on traffic environment using deep learning." In IOP Conference Series: Materials Science and Engineering, vol. 1022, no. 1, p. 012122. IOP Publishing, 2021. DOI: <https://doi.org/10.1088/1757-899X/1022/1/012122>
  30. Mualifah, L. N. A., and A. M. Abadi. "Optimizing the traffic control system of Sultan Agung street Yogyakarta using fuzzy logic controller." In Journal of Physics: Conference Series, vol. 1320, no. 1, p. 012028. IOP Publishing, 2019. DOI: <https://doi.org/10.1088/1742-6596/1320/1/012028>
  31. Yolo Loss function explanation (n.d.). Cross Validated. <https://stats.stackexchange.com/questions/287486/yolo-loss-function-explanation>
  32. Peter, M. N., & Rani, P. (2020). Advanced Traffic Management System using a Fuzzy Logic Controller to Differentiate Parking Vehicle and Moving Vehicle. In International Journal of Innovative Technology and Exploring Engineering (Vol. 9, Issue 5, pp. 488-494). DOI: <https://doi.org/10.35940/ijitee.E2213.039520>
  33. Kumar, N. V., Babu, K. P., Kumar, V. S. S., Ahmed, S. F. S., & Basha, S. A. (2019). Internet of Vehicles for Traffic Management. In International Journal of Recent Technology and Engineering (IJRTE) (Vol. 8, Issue 4, pp. 12230-12232). DOI: <https://doi.org/10.35940/ijrte.D8950.118419>
  34. Suma, Dr. K. G., Sunitha, Dr. G., & Avanija, Dr. J. (2019). Accident Prevention and Traffic Control by Otsu Method and Haar-Cascade Hand Detector. In International Journal of Engineering and Advanced Technology (Vol. 9, Issue 2, pp. 5328-5333). DOI: <https://doi.org/10.35940/ijeat.B3738.129219>

**Disclaimer/Publisher's Note:** The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of the Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP)/ journal and/or the editor(s). The Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP) and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.