



# Hochschule für Angewandte Wissenschaften Hamburg Hamburg University of Applied Sciences


#### AIRCRAFT DESIGN AND SYSTEMS GROUP (AERO)

# Understanding the Aircraft Mass Growth and Reduction Factor

Dieter Scholz Hamburg University of Applied Sciences

https://doi.org/10.5281/zenodo.4159259

**EWADE 2020** - 15th European Workshop on Aircraft Design Education **READ 2020** - Research and Education in Aircraft Design **Online, 21**st and **22**nd **October 2020** 





#### **Abstract**

**Purpose** – This project work shows a literature survey, clearly defines the mass growth factor, shows a mass growth iteration, and derives an equation for a direct calculation of the factor (without iteration). Definite values of the factor seem to be missing in literature. To change this, mass growth factors are being calculated for as many of the prominent passenger aircraft as to cover 90% of the passenger aircraft flying today. The dependence of the mass growth factor on requirements and technology is examined and the relation to Direct Operating Costs (DOC) is pointed out.

**Methodology** – Calculations start from first principles. Publically available data is used to calculate a list of mass growth factors for many passenger aircraft. Using equations and the resulting relationships, new knowledge and dependencies are gained.

**Findings** – The mass growth factor is larger for aircraft with larger operating empty mass ratio, smaller payload ratio, larger specific fuel consumption (SFC), and smaller glide ratio. The mass growth factor increases much with increasing range. The factor depends on an increase in the fixed mass, so this is the same for the payload and empty mass. The mass growth factor for subsonic passenger aircraft is on average 4.2, for narrow body aircraft 3.9 and for wide body aircraft (that tend to fly longer distance) 4.9. In contrast supersonic passenger aircraft show a factor of about 14.

**Practical implications** – The mass growth factor has been revisited in order to fully embrace the concept of mass growth and may lead to a better general understanding of aircraft design.

**Social implications** – A detailed discussion of aircraft costs as well as aircraft development requires detailed knowledge of the aircraft. By understanding the mass growth factor, consumers can have this discussion with industry at eye level.

**Originality/value** – The derivation of the equation for the direct calculation of the mass growth factor and the determination of the factor using the method for 90% of current passenger aircraft was not shown.





# **Acknowledgment**

This presentation is based on the project of

John Singh Cheema

prepared at

Hamburg University of Applied Sciences

Aircraft Design and Systems Group (AERO)

Download from:

http://library.ProfScholz.de

Referenced here as:

Cheema 2020



Project

The Mass Growth Factor – Snowball Effects in Aircraft Design

Author: John Singh Cheema

Supervisor: Prof. Dr.-Ing. Dieter Scholz, MSME

Submitted: 31.03.2020

Faculty of Engineering and Computer Science
Department of Automotive and Aeronautical Engineering





#### **Contents**

- Background
- Literature Review (Overview)
- Definition & Overall Picture
- Iteration of the Mass Growth Factor
- Mass Growth Factor Considering 90% of Passenger Aircraft
- Mass Growth Factor
  - Obtained from Payload Fraction
  - Obtained from Technology and Range
  - Linked to Direct Operating Costs (DOC)
- Summary





## **Background**

- The aircraft mass growth factor is fundamental to aircraft preliminary design. Due to the fact that
  mass during some aircraft design phases seems rather to increase than to decrease compared to
  initial estimates, the factor is called mass growth factor.
- However, a mass reduction factor is mathematically the same. The mass reduction factor can lead
  to even substantial mass reduction and is as such the secret to efficient aircraft design. For
  simplicity and tradition we may just talk about mass growth.
- It is usually defined as the ratio of an increase in the total mass (take-off mass) due to an arbitrary increase in local mass (empty mass) determined after a full iteration in aircraft design to achieve the original performance requirements (payload and range).
- The aircraft design iteration sees after each loop another increment in the take-off mass, so that an initial (local) mass increase aggravates the situation like a snow ball transforming into an avalanche. Hence the pseudonym snowball factor.
- The concept of the mass growth factor is probably as old as aviation. It has been discussed heavily
  from the 1950th to the 1970th and has continued to be mentioned until today. Nevertheless, it
  seems not to be well enough understood today. Maybe its importance has declined due to modern
  computing power providing quite accurate mass estimates in each design phase, but detaching the
  engineer from the feel for the numbers.





## Avalanche - Snow Ball Effect



Avalanche (Dahu1, wikimedia.org, CC BY-SA)





## **Literature Review (Overview)**

Ballhaus 1954 (SAWE Paper)

Saelman 1973 (SAWE Paper)

Fürst 1999 (LTH, Germany)

Sinke 2019 (Lecture Notes, TU Delft)

SAWE 2019 (SAWE Book)

elaborate the principle

#### Aircraft Design Books

Torenbeek 1976 Roskam 1989 Jenkinson 1999 Howe 2000 Müller 2003



talk about design aspects

See **Cheema 2020** for details.

SAWE: Society of Allied Weight Engineers
LTH: Luftfahrttechnisches Handbuch





# **Literature Review (Overview)**

CLEAR DESIGN THINKING USING THE AIRCRAFT GROWTH FACTOR

Вy

Wm. F. Ballhaus

TO BE PRESENTED AT THE SAE NATIONAL AERONAUTICAL MEETING
Los Angeles, California
October 8, 1954





#### **Definition**


$$G = \frac{\text{Change in Gross Weight}}{\text{Fixed Weight Added or Change in Fixed Weight}}$$

Ballhaus 1954





## **Aircraft Design Mass Growth (Overall Picture)**

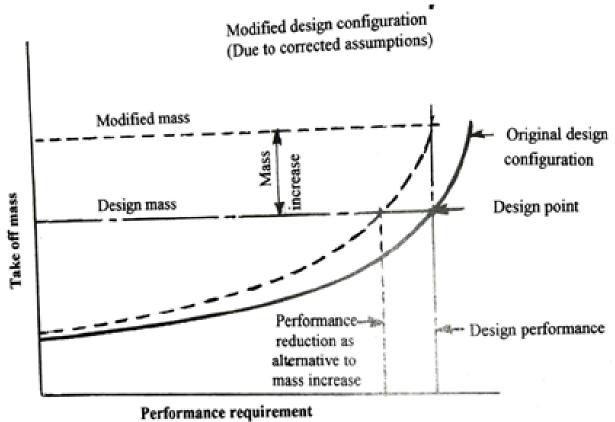

Performance requirement (Such as range or payload)

New curve may become asymptotic at a mass less than the design value

Howe 2000





## **Iteration of the Mass Growth Factor (Equations)**

$$\Delta m_L = 1 \text{ kg}$$

$$m_{MTO,0} = m_{MTO} + \Delta m_G = m_{MPL} + m_{OE} + \Delta m_L + m_F$$

$$m_{MTO,1} = m_{MPL} + \frac{m_{OE}}{m_{MTO}} \cdot m_{MTO,0} + \Delta m_L + \frac{m_F}{m_{MTO}} \cdot m_{MTO,0}$$

$$\Delta m_G = m_{MTO,X} - m_{MTO}$$


$$k_{MG} = \frac{\Delta m_G}{\Delta m_L}$$

$m_F$	Fuel Mass
$m_{MPL}$	Maximum Payload
$m_{PL}$	Payload
$m_{MTO}$	Maximum take-off mass
$m_{OE}$	Operating empty mass
$\Delta m_L$	Local mass growth
$\Delta m_G$	Global mass growth
$k_{MG}$	Mass growth factor





## Iteration of the Mass Growth Factor (Excel Table)

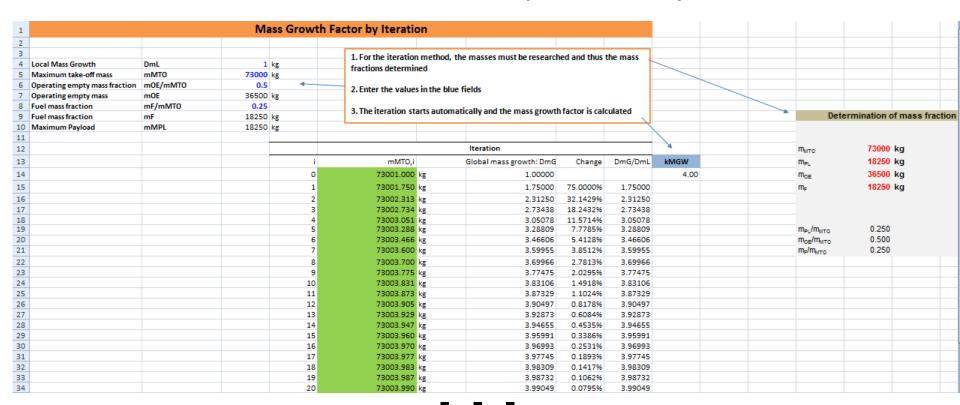




Data and tools uploaded to Harvard Dataverse: <a href="https://doi.org/10.7910/DVN/6NHDDP">https://doi.org/10.7910/DVN/6NHDDP</a>





## **Iteration of the Mass Growth Factor (Convergence)**

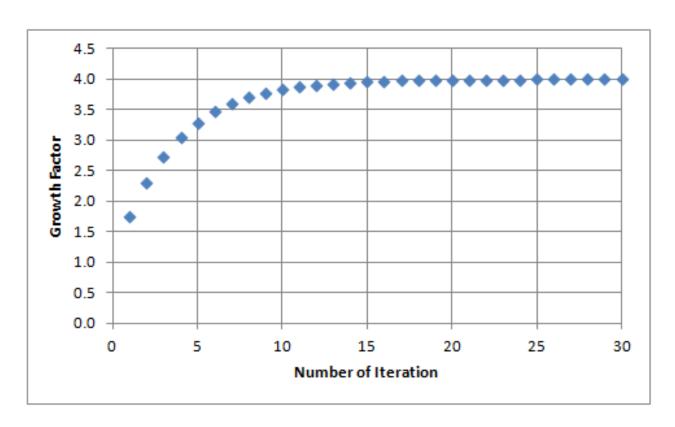

Convergence of the mass growth factor using the example of the Boeing 767-300





# **Considering 90% of Passenger Aircraft**

#### **World Fleet**

 Table A.1
 90% of current aircraft (according to Robson 2019)

Aircraft Type	Number in Operation	Percent of total	Sum of most aircraft types in percent
Boeing 737-800	4804	16.83%	16.83%
A320	4135	14.48%	31.31%
A320neo	658	2.30%	33.61%
A321neo	160	0.56%	34.18%
A321	1650	5.78%	39.95%
Boeing 737 Max 8		0.00%	39.95%
A319	1249	4.37%	44.33%
Boeing 737-700	1005	3.52%	47.85%
ATR72	775	2.71%	50.56%
Boeing 777-300(ER)	829	2.90%	53.47%
Embraer 175	595	2.08%	55.55%
Boeing 787-9	451	1.58%	57.13%
A330-300	707	2.48%	59.61%
Boeing 767-300	622	2.18%	61.79%
A350-900	261	0.91%	62.70%
Boeing 757-200	600	2.10%	64.80%
A330-200	547	1.92%	66.72%
Boeing 737-900	550	1.93%	68.64%
De Havilland Canada Dash 8-400	502	1.76%	70.40%
Embraer 190	495	1.73%	72.14%
Boeing 737 Max TBD		0.00%	72.14%
Bombardier CRJ900	444	1.56%	73.69%
A220	77	0.27%	73.96%
Boeing 777-200	431	1.51%	75.47%
Embraer ERJ-145	422	1.48%	76.95%
Boeing 737 Max 10		0.00%	76.95%
Boeing 787-8	328	1.15%	78.10%

e.g. 27 aircraft, 78.1% of fleet






# **Considering 90% of Passenger Aircraft**

$$\left(\frac{n}{n_{max}}\right)_{in\_service} = 1 - a \cdot e^{b\left(\frac{n}{n_{max}}\right)_{type}}$$

a 0.7480879 b -0.047978

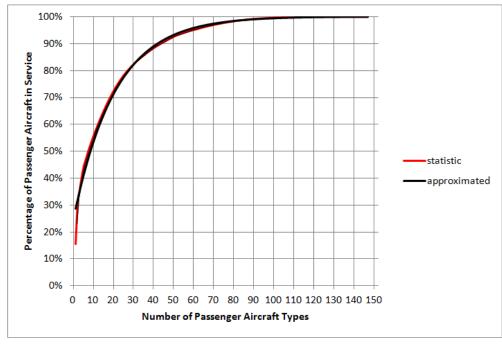

with data from Flight 2016





# Mass Growth Factor – Considering 90% of Passenger Aircraft

**Table 3.3** Evaluation of 90% of all current flying commercial aircraft including two supersonic aircraft

m <sub>MTO</sub> [kg]	m <sub>OE</sub> [kg]	$m_{MPL}$ [kg]	$k_{MGW}$	Sources
78220	41480	14690	5.32	Jenkinson 2019
73500	42100	18633	3.94	Jackson 2011
79000	44300	20000	3.95	Airbus 2005, Wiki 2020
97000	50100	25500	3.80	Airbus 2005a, Wiki 2020
89000	48000	22780	3.90	Jenkinson 2019
64000	39200	17390	3.68	Jenkinson 2019
69400	37585	11610	5.97	Jenkinson 2019
22500	12950	7350	3.06	Jackson 2011
299370	155960	68570	4.36	Jackson 2011
37500	21810	9890	3.79	Jackson 2011
244940	128850	52587	4.65	Boeing 2018, Wiki 2020c
217000	118189	48400	4.48	Jenkinson 2019
156489	87135	39140	3.99	Jenkinson 2019
280000	142400	53300	5.25	Airbus 2005b, Wiki 2020a
115900	58040	25690	4.51	Jenkinson 2019
230000	120200	36400	6.31	Jenkinson 2019
74389	42901	19831	3.75	Boeing 2013, Wiki 2020e
24993	14968	7257	3.44	Lambert 1991
50300	28080	13530	3.71	Jackson 2011
36500	21430	10320	3.53	AirlinesInform 2020
63049	35221	15127	4.16	Airbus 2019, Wiki 2020d
242670	135875	54635	4.44	Jenkinson 2019
	[kg] 78220 73500 79000 97000 89000 64000 69400 22500 299370 37500 244940 217000 156489 280000 115900 230000 74389 24993 50300 36500 63049	[kg]         [kg]           78220         41480           73500         42100           79000         44300           97000         50100           89000         48000           64000         39200           69400         37585           22500         12950           299370         155960           37500         21810           244940         128850           217000         118189           156489         87135           280000         142400           115900         58040           230000         120200           74389         42901           24993         14968           50300         28080           36500         21430           63049         35221	[kg]         [kg]         [kg]           78220         41480         14690           73500         42100         18633           79000         44300         20000           97000         50100         25500           89000         48000         22780           64000         39200         17390           69400         37585         11610           22500         12950         7350           299370         155960         68570           37500         21810         9890           244940         128850         52587           217000         118189         48400           156489         87135         39140           280000         142400         53300           115900         58040         25690           230000         120200         36400           74389         42901         19831           24993         14968         7257           50300         28080         13530           36500         21430         10320           63049         35221         15127	[kg]         [kg]         [kg]         RMGW           78220         41480         14690         5.32           73500         42100         18633         3.94           79000         44300         20000         3.95           97000         50100         25500         3.80           89000         48000         22780         3.90           64000         39200         17390         3.68           69400         37585         11610         5.97           22500         12950         7350         3.06           299370         155960         68570         4.36           37500         21810         9890         3.79           244940         128850         52587         4.65           217000         118189         48400         4.48           156489         87135         39140         3.99           280000         142400         53300         5.25           115900         58040         25690         4.51           230000         120200         36400         6.31           74389         42901         19831         3.75           24993         14968

90% of aircraft considered globally with more than 19 seats by looking at 44 aircraft types.

ATR 72: propeller aircraft, short range

Cheema 2020



#### **Wisdom Gained**

- 1.) Larger aircraft do not necessarily have a higher mass growth factor.
- 2.) It does not matter how large the local mass growth is; the mass growth factor remains unaffected.\*

$$m_{MTO} + \Delta m_G = m_{MPL} + m_{OE} + \Delta m_L + m_F$$

- 3.) It does not matter whether there is one kg more operating empty mass or one kg more payload on board. The mass growth factor for a growth in the operating empty mass is therefore the same factor as for a growth in the payload.
- 4.) Old long-range aircraft are more sensitive to local mass growth than new short-range aircraft.
- \* This as long as the local mass growth is much smaller than the fixed mass. The position of the local mass growth does not matter, if the wing is not yet fixed and is positioned according to the new weight and balance situation.





# **Mass Growth Factor – Aircraft Categories**

 Table 4.1
 Mass growth factor for different aircraft categories

	Aircraft categories			
	Wide-Body	Narrow-Body	Subsonio	Supersonic
$k_{MG}$	4.91	3.85	4.23	13.82



# **Mass Growth Factor – Obtained from Payload Fraction**

After a longer derivation (Cheema 2020), we find a simple equation:

$$k_{MG} = \frac{m_{MTO}}{m_{MPL}} = \frac{1}{1 - \frac{m_F}{m_{MTO}} - \frac{m_{OE}}{m_{MTO}}}$$

Table 4.2 Mass growth factor for typical mass fractions

	Range type		
	Short-range	Medium-range	Long-range
$m_{OE}/m_{MTO}$	0.60	0.525	0.45
$m_F/m_{MTO}$	0.15	0.3	0.45
$k_{MG}$	4	5.7	10



## **Mass Growth Factor – Can Go to Infinity**

$$k_{MG} = rac{m_{MTO}}{m_{MPL}} = rac{1}{1 - rac{m_F}{m_{MTO}} - rac{m_{OE}}{m_{MTO}}}$$

As soon as

$$\left(\frac{m_F}{m_{MTO}} + \frac{m_{OE}}{m_{MTO}}\right)$$

approaches 1.0 the mass growth factor,  $k_{MG}$  goes towards infinity!

This means the design task has no solution!






## **Mass Growth Factor – Payload Fraction from Statistics**

$$k_{MG} = \frac{1}{\frac{m_{MPL}}{m_{MTO}}}$$

#### small A/C; short range

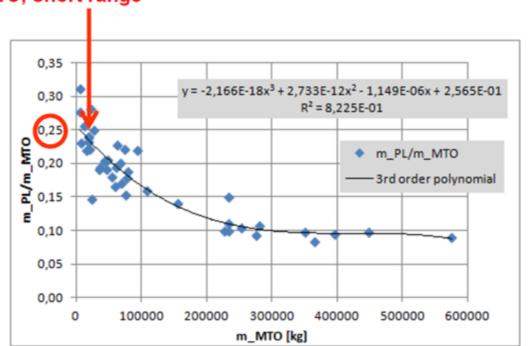


$$k_{MG} = 4 \dots 10$$

Scholz 2018





## Mass Growth Factor – Obtained from Technology and Range

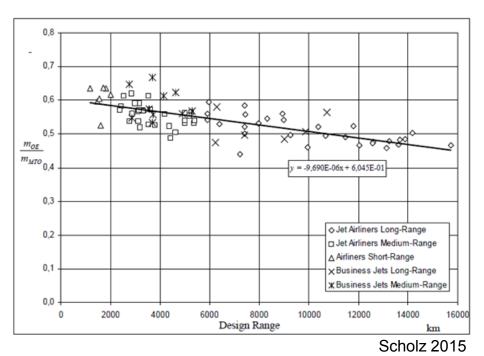

C	Specific fuel consumption
R	Range
$\boldsymbol{B}$	Breguet factor
$\boldsymbol{E}$	Glide ratio in cruise flight
V	Cruising speed

$$B = \frac{E \cdot V}{c \cdot g}$$

$$\frac{m_F}{m_{MTO}} = 1 - e^{-\frac{R}{B}}$$

$$\frac{m_{OE}}{m_{MTO}} = 0.5967 - 0.0000166(1/\text{NM}) \cdot R$$

Lehnert 2018

$$k_{MG} = \frac{1}{1 - (0.5967 - 0.0000166(1/NM) \cdot R) - \left(1 - e^{-\frac{R}{B}}\right)}$$





## Mass Growth Factor – Linked to Direct Operating Costs (DOC)

#### Seat-Mile-Costs:

$$C_{s,m} = \frac{C_{a/c,t}}{R \cdot n_s} = \frac{C_{a/c,a}}{R \cdot n_s \cdot n_{t,a}}$$

$$DOC = C_{DOC} = C_{a/c,a}$$
depends on cruise speed (given)
$$range \text{ (given)}$$

$$DOC \approx m_{MTO} = m_{OE} + m_F + m_{PL} \leftarrow \text{ payload (given, constant)}$$
fuel costs
depreciation, maintenance costs

$$\frac{DOC}{n_S} \approx \frac{m_{MTO}}{m_{PL}} = \frac{1}{\frac{m_{PL}}{m_{MTO}}} = k_{MG}$$

$C_{a/c,a}$	Aircraft annual costs
$n_{t,a}$	Number of Flights per year
$C_{s,m}$	Seat-mile costs
$C_{a/c,t}$	Aircraft trip cost





# **Summary**

- The mass growth (and reduction) factor is well known, but not well understood:
  - Derivation missing => added
  - Numerical values missing => added

- $k_{MG} = \frac{1}{\frac{m_{MPL}}{m_{MTO}}}$
- Average value for subsonic passenger aircraft: 4.2
   range from 3.1 (ATR-72) via 6.2 (A380) and 6.5 (B747-400) to 15.6 (Concorde)
- The mass growth factor important for the design phase (snow ball effect) and also a good indicator to quickly understand the aircraft's economy.
- The mass growth factor can be estimated from basic parameters:
   range, R; E = L/D; c = SFC; cruise speed, V:

$$k_{MG} = \frac{1}{1 - (0.5967 - 0.0000166(1/\text{NM}) \cdot R) - \left(1 - e^{-\frac{R}{B}}\right)}$$

$$B = \frac{E \cdot V}{c \cdot g}$$





#### Contact

info@ProfScholz.de

http://www.ProfScholz.de

http://library.ProfScholz.de (Projects and Theses)

#### **Quote this document:**

SCHOLZ, Dieter, 2020. *Understanding the Aircraft Mass Growth and Reduction Factor* (EWADE/READ 2020, Online, 21./22.10.2020), 2020. Available from: <a href="https://doi.org/10.5281/zenodo.4159259">https://doi.org/10.5281/zenodo.4159259</a>

© Copyright by Author, CC BY-NC-SA, <a href="https://creativecommons.org/licenses/by-nc-sa/4.0">https://creativecommons.org/licenses/by-nc-sa/4.0</a>







#### References

BALLHAUS, William F., 1954. *Clear Design Thinking Using the Aircraft Growth Factor*. In: 14th National Conference, Hilton Hotel, Fort Worth, Texas, May 2-5. Los Angeles, California: Society of Allied Weight Engineers, Inc. Available from: https://www.sawe.org/papers/0113

FLIGHT INTERNATIONAL, 2016. World Airliner Census 2016.

Archived at: <a href="https://bit.ly/35oZqn4">https://bit.ly/35oZqn4</a>

FÜRST, A., 1999. *Masseeinfluß-/Massezuwachsfaktor (growth-factor)*. Ottobrunn, Germany: IABG LTH-Koordinierungsstelle, Aeronautical manual.

HOWE, Denis, 2000. *Aircraft Conceptual Design Synthesis*. London: Professional Engineering Publishing.

JENKINSON, Lloyd; SIMKIN, Paul; RHODES, Darren, 1999. *Civil Jet Aircraft Design*. Oxford, UK: Butterworth-Heinemann.

LEHNERT, Jan, 2018. *Methoden zur Ermittlung des Betriebsleermassenanteils im Flugzeugentwurf*. Hamburg, Germany: Department of Automotive and Aeronautical Engineering, University of Applied Science of Hamburg, Master Thesis.

Available from: https://nbn-resolving.org/urn:nbn:de:gbv:18302-aero2018-05-24.014





- MÜLLER, Friedrich, 2003. Flugzeugentwurf: Entwurfssystematik, Aerodynamik, Flugmechanik und Auslegungsparameter für kleinere Flugzeuge. Fürstenfeldbruck: TFT-Verlag.
- ROBSON, Melanie, 2019. Flight Magazine: Perfect formation. Sutton: Flight Global, 2019-07-30.
- ROSKAM, Jan, 1989. *Aircraft Design. Vol.1: Preliminary Sizing of Aircraft.* Ottawa, Kansas: Design Analysis and Research Corporation.
- SAELMAN, B., 1973. *The Growth Factor Concept*. In: 32nd Annual Conference, London, England, June 25-27. Los Angeles, California: Society of Allied Weight Engineers, Inc. Available from: <a href="https://www.sawe.org/papers/0952">https://www.sawe.org/papers/0952</a>
- SAWE, 2019. *Introduction to Aircraft Weight Engineering*. Los Angeles, California: Society of Allied Weight Engineers, Inc.
  - Available from: <a href="https://www.sawe.org/technical/publications/aircrafttextbook">https://www.sawe.org/technical/publications/aircrafttextbook</a>
- SCHOLZ, Dieter, 2015. *Aircraft Design*. Hamburg, Germany: Department of Automotive and Aeronautical Engineering, University of Applied Science of Hamburg, Lecture Notes. Available from: <a href="http://HOOU.ProfScholz.de">http://HOOU.ProfScholz.de</a>
- SCHOLZ, Dieter, 2018. Evaluating Aircraft with Electric and Hybrid Propulsion. In: *UKIP Media & Events: Conference Proceedings : Electric & Hybrid Aerospace Symposium 2018* (Cologne, 08 -09 November 2018), 2018. Download: <a href="http://EHA2018.ProfScholz.de">http://EHA2018.ProfScholz.de</a>





SINKE, Jos, 2019. How Aircraft Fly. Delft, Netherlands: Department of Aerospace

Engineering, Delft University of Technology, Lecture Notes.

Available from: https://bit.ly/3jakseW

Archived as: <a href="https://perma.cc/NKX9-WKLY">https://perma.cc/NKX9-WKLY</a>

TORENBEEK, Egbert, 1982. Synthesis of Subsonic Aircraft Design. Delft: Delft University

Press.

Available from: <a href="https://bit.ly/3dLSeVQ">https://bit.ly/3dLSeVQ</a>