

Performance Analysis of Solar Stills with Different Absorbing Materials

Maneesh Kumar, Devendra Singh, Ajay Kumar Sharma

Abstract: Water is the fundamental need of humanity. The consumption of water is rising with each day. The major parts of the available water, i.e. 97%, are saline seawater and 2% is ice and glaze. Just 1% of the water is pure drinking water. Therefore in order to satisfy the demand for fresh water, it is important to turn the impurity of salty sea water or brackish water into pure water. The Solar Single Slope Single Basin (SSSB) is not being experimentally investigated. The experimentation was performed during the months of May and June 2020 under Indian climatic conditions. The efficiency of still cotton cloth with marbles and jute cloth with marbles is 50.00 per cent and 46.15 per cent respectively, higher than average.

Keywords: Solar radiation, Solarimeter, Cotton and Jute wick, Solar still.

I. INTRODUCTION

Water, energy and the environment remain critical elements for the ecological growth of individuals and are thus rightly referred to as life support systems. In many countries around the world, fresh water is increasingly becoming a scarce resource. Although most accessible as a result of anthropogenic activities, there have been periods which has to be removed from adulterated water generally salt water. Several inhospitable desert and semi-arid countries are taking scarcity of treated wastewater from dietary origin. The desalinated sea water is the main source of drinking water in those countries. The developing nations are taking steps to find good potable water due to the increase in the population combined with the growth of industrial and agricultural sector. There is however, a discrepancy between available water supplies and consumption due to a shortage of drinking water. Abdulrahman et al. [1] carried out experiments in four solar-type basin stills. Three stills used to have a mirror thickness of 3 mm, 5 mm, 6 mm, whereas the remaining remained acrylic. The slimmest reflector recorded the maximum productivity levels, up by 15.5 per cent. Valsaraj[2] carried out experimentation in a single slope solar reservoir still after the introduction of a submerged corrugated and rolled aluminium sheet on the water surface. Owing to the amendments proposed, the efficiency of the single slope solar basin is still increased. Phadatare et al. [3] have examined the impact of deep water on inner thermal convection in a single reservoir of tape dispenser solar still.

Revised Manuscript Received on November 05, 2020.

* Correspondence Author

Maneesh Kumar*, Department - Mechanical Engineering, Sachdeva Institute of Technology, Mathura-281122, Uttar Pradesh, India.

Email: maneeshkrsit126@gmail.com

Devendra Singh, Department - Mechanical Engineering, Sachdeva Institute of Technology, Mathura-281122, Uttar Pradesh, India.

Email: devendrasit@gmail.com

Ajay Kumar Sharma, Department - Mechanical Engineering, Institute of Engineering & Technology, Lucknow-226021, Uttar Pradesh, India.
Email: ajaysharma@ietlucknow.ac.in

The findings have shown all this with the rise in water depth, sunlight performance of still is decreasing. Velmurugan et al. [4] have carried out experiments in step-by-step solar still retaining a minimal water depth. Analytical and empirical research was carried out for the form of fin, the sort of substrate and the variation of the fin and the form of substrate still in the solar phase. Velmurugan et al. [5] have rendered an effort to increase the efficiency of solar stills by linking a miniature solar pond and an individual solar pond still in sequence. Murugavel et al. [6] performed experimentation in a double-sided solar basin still using various hose substances. The water column with hose substance in the basin would improve the evaporative cooling effect and improve efficiency. Once the fin and sponge form were still in usage, productivity improved by 80 per cent compared to the usual single solar basin. Minasian et al. [7] have established a wick-type still and a standard still that are linked and established as a single entity. The wicks contain water through capillarity. Kabeel[8] carried out still pyramid-shaped developmental experiments. The curved wick surface has been used for evapotranspiration and the outer layers of the pyramid still formed have been used for distillation process. Mahdi et al. [9] developed and made a tilted wick kind still. Acrylic cloth has been used as a wick product. It has been observed that the performance of the wick form continues to decline as a result in the input water mass flow rate. In the experimental research, tests were performed on single basin solar stills (SBSS) in various wicks (cotton cloth and jute cloth) on the internal surface of the basin. Khalifa et al. [10] investigated the impact of insulation on the efficiency of solar stills. Test was carried out on four stills via an insulation of 30 mm, 60 mm, 100 mm and the last still without insulated. Rehim et al. [11] carried out an experimental study in the solar system with two adjustments. The very first was to get a loaded layer that's been mounted in the streambed to make it even more effective.

II. EXPERIMENTAL SET-UP

Experiments were conducted in a still at the Sachdeva Institute of Technology, (27.4924° N, 77.6737° E) Uttar Pradesh, India. The trials were performed in the periods of May and June 2020. The scale of the basin was 0.5 m x 0.5 m x 0.15 m. Normal glass windows with a thickness of 3 mm have been used as transparent covers. The wraps remained angled at an optimal angle of 270 with a fixed point. Thermocolumn with a thickness of 5 mm has been used as covering. The trials have been carried out with three distinct wick fabrics, like cotton cloth and jute cloth. The wicks are repainted to enhance absorption. The efficiency of the two wick stills were contrasted to that of the traditional stills.



Performance Analysis of Solar Stills with Different Absorbing Materials

The wicks were attached to all the inner surface of the still basin. Experimentation was also performed with wicks and marbles in the basin. The diameter of used marbles varies from 20 to 30 mm. The weight of the marbles used is 1 kg for all tests. Storage gullies were supplied at the base to store the filtrate. Amendments have also been provided for the distribution of salt water, the drainage of the evaporation rate and the use of temperature sensors. Figure 1 displays the still photograph version. Figure 2 shows the view on jute fabric, black cotton and pebbles.



Fig. 1. Experimental Setup of Still



Fig. 2. Photographic view of jute cloth, black cotton and pebbles

III. WORKING PRINCIPLE

Desalination process utilizes the warmth of the sun explicitly in a small piece of water purification apparatus. The

machinery, generally referred as a solar still, makes up the bulk of a small basin with a clear glass cover. The sun warms the water in the reservoir, triggering evaporation. Condensation grows, disperses on the covering and flows back into the trough, bringing aside salts, minerals, and whatever other contaminants, even pathogens. While it may be very costly to create a solar still that is both powerful and light as possible, it can generate filtered water at a fair cost if it is made correctly, controlled and managed.

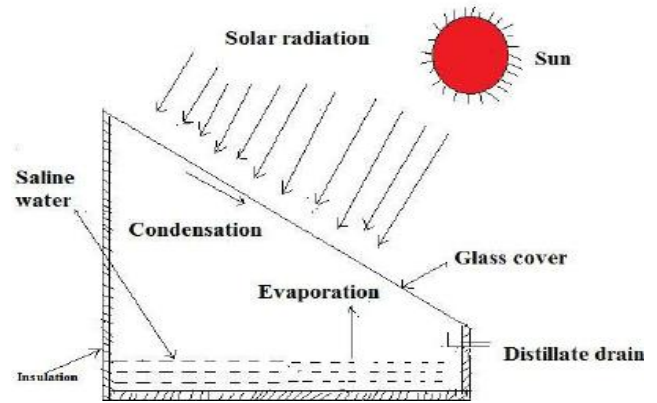


Fig. 3. Basic Principle of Solar Still

IV. RESULTS AND DISCUSSIONS

First experiment has been done on 24th May 2020 on single slope solar still without materials, there are following temperatures of Bottom, Glass and Water were recorded as shown in fig.4.

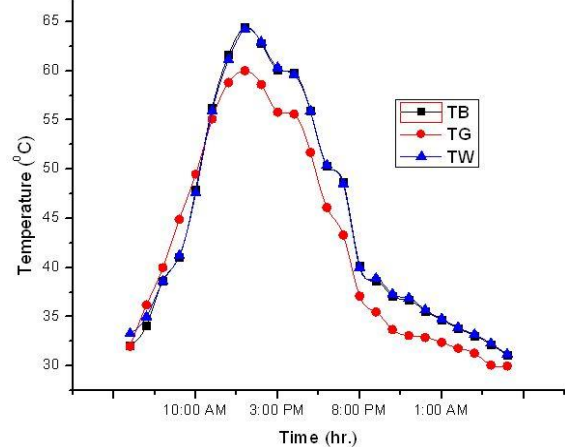


Fig. 4. Temperature of bottom, glass and water on 24th May 2020

Just at completion of the 24-hour cycle, the result of produced still water being evaluated, 350 ml of distilled water was obtained from 8 litres of stagnant water in 24 hours. The next experiment was carried out on 26 May 2020 on single-slope solar still using black cotton wick, with temperatures below Bottom, Glass and Water reported as shown in fig.5. Also at conclusion of the 24-hour trial, the product of the produced still water being evaluated, 575 ml of still water being retrieved from 8 litres of stagnant water in 24 hours.

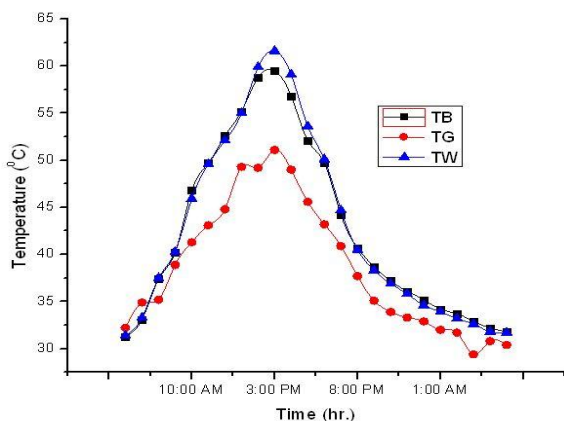


Fig. 5. Temperature of bottom, glass and water on 26th May 2020 (with black cotton)

Third experiment has been done on 28th May 2020 on single slope solar still using jute wick, there are following temperatures of Bottom, Glass and Water were recorded as shown in fig.6. Only at conclusion of the 24-hour trial, the product of the produced still water being evaluated, 550 ml of still water being retrieved from 8 litres of stagnant water in 24 hours.

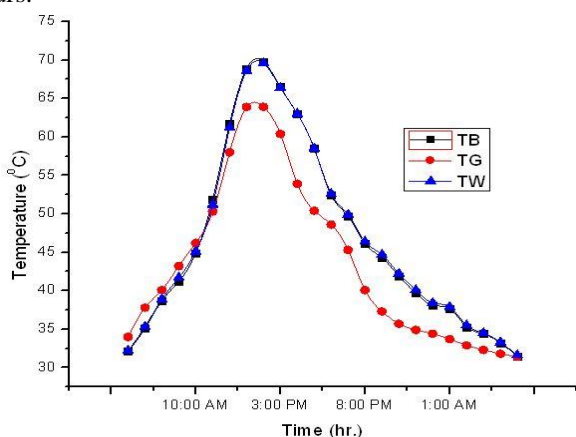


Fig. 6. Temperature of bottom, glass and water on 28th May 2020 (with jute)

Forth experiment has been done on 30th May 2020 on single slope solar still using cotton cloth with pebbles, there are following temperatures of Bottom, Glass and Water were recorded as shown in fig.7. Just at conclusion of the 24-hour trial, the product of produced still water being evaluated, 700 ml of still water being retrieved from 8 litres of stagnant water in 24 hours.

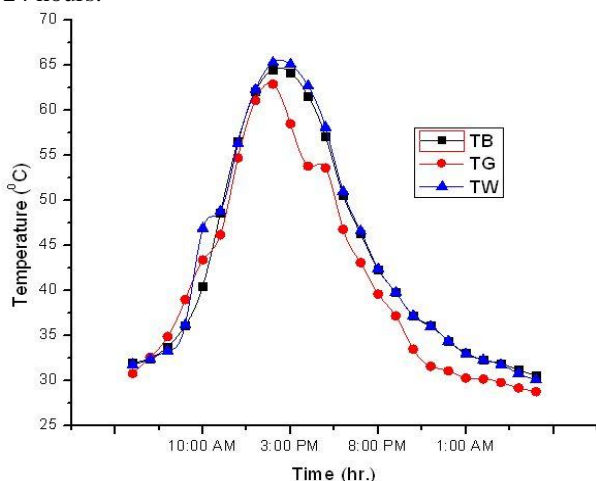


Fig. 7. Temperature of bottom, glass and water on 30th May 2020 (with cotton cloth with pebbles)

Fifth experiment has been done on 02th June 2020 on single slope solar still using jute cloth with pebbles, there are following temperatures of Bottom, Glass and Water were recorded as shown in fig.8. Just at conclusion of the 24-hour trial, the product of the produced still water being evaluated, 650 ml of still water being retrieved from 8 litres of stagnant water in 24 hours.

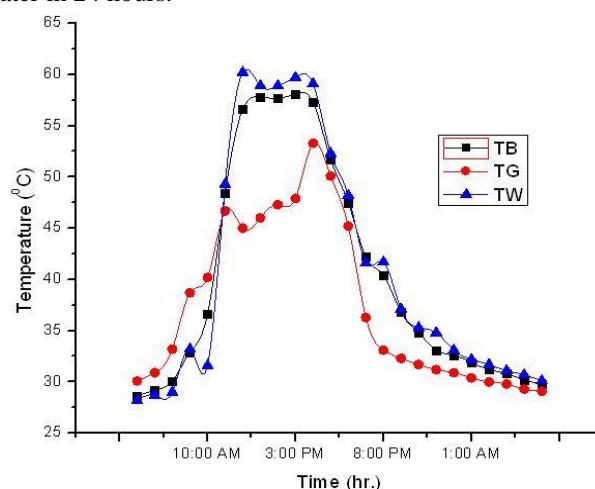


Fig. 7. Temperature of bottom, glass and water on 30th May 2020 (with jute cloth with pebbles)

V. CONCLUSION

Four SBSS solar stills are being manufactured and whose efficiency has been contrasted to numerous basin situations. The main findings shall be drawn:

- The supply of various wicks on the internal surface of the basin improves performance.
- The performance of cotton cloth and jute cloth is 39.13 per cent and 36.36 per cent respectively, higher than traditional cloth.
- The performance of still cloth with marbles and jute cloth with marbles is 50.00 per cent and 46.15 per cent respectively, higher than traditional still.

REFERENCES

1. Abdulrahman Ghoneyem & Arif Ileri 1997, 'Software to analyze solar stills and an experimental study on the effects of the cover', *Desalination*, vol. 114, pp. 37-44.
2. Valsaraj, P 2002, 'An experimental study on solar distillation in a single slope basin still by surface heating the watermass', *Renewable Energy*, vol. 25, pp. 607-612.
3. Phadatare, MK & Verma, SK 2007, 'Influence of water depth on internal heat and mass transfer in a plastic solar still', *Desalination*, vol. 217, pp. 267-275.
4. Velmurugan, V & Srithar, K 2007, 'Solar stills integrated with a mini solar pond – analytical simulation and experimental validation', *Desalination*, vol. 216, pp. 232-241.
5. Velmurugan, V, Naveen Kumar, KJ, Noorul Haq, T & Srithar, K 2009, 'Performance analysis in stepped solar still for effluent desalination', *Energy*, vol. 34, pp. 1179-1186.
6. Kalidasa Murugavel, K & Srithar, K. 2011, 'Performance study on basin type double slope solar still with different wick materials and minimum mass of water', *Renewable Energy*, vol. 36, pp. 612-620.
7. Minasian, AN & Al-karaghoul, AA 1995, 'An Improved Solar still: The wick-basin type, *Energy Conversion and Management*', vol. 36, pp. 213-217.

Performance Analysis of Solar Stills with Different Absorbing Materials

8. Kabeel, AE 2009, 'Performance of solar still with a concave wick evaporation surface Energy', vol. 34, pp. 1504-1509.
9. Mahdi, JT, Smith, BE & Sharif, AO 2011, 'An experimental wicktype solar still system: Design and construction', Desalination, vol. 267, pp. 233-238.
10. Abdul Jabbar Khalifa, N & Ahmad Hamood, M 2009, 'Effect of insulation thickness on the productivity of basin type solar stills: An experimental verification under local climate', Energy Conversion and Management, vol. 50, pp. 2457-2461.
11. Zeinab Abdel-Rehim, S & Ashraf Lasheen 2005, 'Improving the performance of solar desalination systems', Renewable Energy, vol. 30, pp. 1955-1971.

AUTHORS PROFILE



Maneesh Kumar is a student of Sachdeva Institute of Technology, Farah, Mathura in mechanical Engineering department. I am pursuing M.Tech. from Dr.APJ Abdul Kalam Technical University (Formerly U.P.T.U.) Lucknow. I have been completed B.Tech. from Uttar Pradesh Technical University, Lucknow. At present, I am publishing 1st research paper in Journal and conferences of international. I have been participated in different activities of college like cricket, football, annual functions.



Devendra Singh is an assistant Professor in Mechanical Engineering department in Sachdeva Institute of Technology, Farah, Mathura, Uttar Pradesh, India. He has thirteen years of Academic and Professional experience. He received M.Tech degree in Mechanical Engineering from Uttar Pradesh Technical University, Lucknow and pursuing Ph.D. from Dr.APJ Abdul Kalam Technical University (AKTU) Lucknow. He has guided several students at master and undergraduate level. His area of current research includes distillation, design, CFD and thermal engineering. He has also been a principal investigator in the DST department. He has organized many seminars in the college. He has published more than 14 research papers in Journals and Conferences of International.



Dr. Ajay Kumar Sharma as an Assistant Professor in Mechanical Department in Institute of Engineering & Technology (IET), Lucknow and He has 20 years of Academic and Professional experience. He received Ph.D. from Indian Institute of Technology (IIT) Delhi. He has guided several students at master and undergraduate level. His area of current research includes Renewable Energy and Thermal Engineering. He has published more than 21 research papers in SCI Journals, Scopus and Conferences on International. He has also received the award for the best teacher. He is also a supervisor to Ph.D. of four students. He has also held a conference in his college.