

# Optimization of Biodiesel (Rubber Seed Oil) Process Parameters using Taguchi Method Based on Experimental Procedure in A Batch Stirred Tank Reactor

Ravikumar R\*, Sowmiya T, Srilakshmi K M, Pragatheesh. L, Sukeerthi A

**Abstract:** Due to the increase in the demand for an alternate fuel the research studies towards searching for a low cost source and optimum conditions with new reactors were gaining momentum. Hence the present investigation is focused on the design of a batch stirred tank reactor with two different impellers to produce biodiesel with the use of rubber seed oil. Further an experiment was conducted in optimizing the process parameters using Taguchi methodology. The Taguchi methodology is mainly focused on the enhancement of the product produced and this is the most precise method used. The best combinations were obtained through the L9 orthogonal array. The reactor specifications were fixed to be 7.5cm. height, 7.5cm diameter, 2.5 cm agitator diameter, 0.625cm baffle thickness with 2.5cm as distance between bottom of the tank and impeller. Two impellers with 0.5cm. Width, 0.625cm length and others with 1.1cm length were used to test the individual performance towards yield. The optimum conditions obtained were found to be Impeller type- Straight blade impeller, Temperature- 65°C, Time - 45min, Reactant ratio - 1:6, Catalyst amount- 22.46% (mol% of Oil), and Impeller Speed- 500rpm with the yield of 88 % . Hence BSTR reactors could be scaled up for translational research studies too.

**Keywords:** Baffle, Batch Stirred Tank Reactor, Biodiesel, Impeller.

## I. INTRODUCTION

Biodiesel is an alternative energy source having substantial role in environment considering its Eco friendliness and is capable of restoring the world energy demand. However, at the same time, it also achieves environmental sustainability. Biodiesel is significant as it does not require any other special equipment and which can also be utilized in all forms of diesel engines when compared with other alternative sources. Overall, biodiesel is harmless and renewable; therefore, its production is increasing fast, notably in countries like Europe, United States, and Asia [1][2]. Through transesterification process vegetable oil can also be subjected in producing biodiesel. Biodiesel can be produced by using plant or crop materials such as Jatropha curcas, Pungamia pinnata, soya bean, and sunflower as the major feedstocks.

**Revised Manuscript Received on September 25, 2020.**

\*Corresponding Author

**Ravikumar R**, Department of Biotechnology, Bannari Amman Institute of Technology, Erode, Tamil Nadu, India. Email: ravikumarr@bitsathy.ac.in.

**Sowmiya T**, Department of Biotechnology, Bannari Amman Institute of Technology, Erode, Tamil Nadu, India. Email: [sowmiya.bt17@bitsathy.ac.in](mailto:sowmiya.bt17@bitsathy.ac.in).

**Srilakshmi K M**, Department of Biotechnology, Bannari Amman Institute of Technology, Erode, Tamil Nadu, India.

**Pragatheesh. L**, Department of Biotechnology, Bannari Amman Institute of Technology, Erode, Tamil Nadu, India.

**Sukeerthi A**, Department of Biotechnology, Bannari Amman Institute of Technology, Erode, Tamil Nadu, India.

The extravagant edible oil cost constraints their use in biodiesel preparation, whereas, non-edible oils are mostly preferred for biodiesel production. It is also approximated that India has the capability to produce one million ton of biodiesel per year. Over 200 districts in India are inaugurated for biofuel project by the Government of India's planning commission. Jatropha (Jatropha curcas) and Karanja (Pungamia pinnata), were considered efficient enough by the commission for the biodiesel production [3][4][5][6][7][8][9]. Moreover, the policy of auto fuel document clearly affirms that it is the most efficient, eco-friendly, and renewable alternate to gasoline fuels [10] Transesterification is a feasible method widely used for biodiesel production from lipids that react chemically like the animal fat and vegetable oils (associated with alcohol-producing fatty acid esters). Trading the alkoxy group of an ester compound with another form of alcohol are all the methods of transesterification. Alkoxy groups in general are the combination of alkyl (C and H) group linked with oxygen R-O. An acid or base act as catalyst for these reactions. The rate of reactivity is enhanced when a proton is donated from acids to the carbonyl group. On the other hand, bases catalyse the reaction of the compound by which the alcohols are more reactive as a proton is removed from it. By the way, the optimization of biodiesel production parameters is mandatory to achieve maximum yield. The consolidation of the transesterification process and for the production of biodiesel from Jatropha-alga oil [11] Response Surface Methodology (RSM) technique was performed. The Mahua and Karanja which are unpalatable food has served the purpose of bringing out the biodiesel with 50:50 by v/v mixing of both. Alkaline transesterification and acid esterification with a double-pass reaction was carried out where the former of free fatty acid (FFA) quantity was decreased to a necessitate limit and the latter converted the oils to fatty acids of methyl esters. By making use of catalyst the sulphuric acid was taken for the process to take place. Transesterification needs the mixture of KOH and methanol. Besides being cheap, methanol with the functional OH group in it depletes the reaction time. To extract biodiesel from jatropha both the non-catalytic and catalytic techniques were utilized. The production of biodiesel could be considered perfect if the content of free fatty acid (FFA) of the Jatropha oil for an alkaline catalyst was less than 1% and a two-step transesterification process was greater than 1%.



## Optimization of Biodiesel (Rubber Seed Oil) Process Parameters using Taguchi Method Based on Experimental Procedure in A Batch Stirred Tank Reactor

Biodiesel was obtained employing transesterification technique for *Jatropha Curcas* using a single-pass alkaline catalyst and it was inspected [12]. To optimize the variables like reactant proportion, reaction temperature and methods of purification, Taguchi's methodology was preferred. Gemma Vicente [14] studied biodiesel production from sunflower oil and came up with an optimization procedure. They described that purity of biodiesel was regulated by the catalyst concentration [13]. They also reported the most favourable values of catalyst concentrations, reaction temperature and molar ratio. These working conditions forecasted maximum values of biodiesel purity (100% weight), maximum yield (98.4% weight), and its profitability. Gemma Vicente [14] precisely studied the material balance of the fatty acid methyl esters synthesis from sunflower oil utilizing potassium hydroxide (KOH) as a catalyst. In their research, they examined the effect of operating conditions of material balance by utilizing a central composite design process. The Rubber seed oil-based biodiesel offers an assuring substitute to diesel. The acid value was found to be high for Rubber Seed oil.

### II. MATERIALS AND METHODS

#### A. Materials and Chemicals

Firstly, Rubber seed oil was obtained from nearby dealers. These dealers are globally involved in producing the required raw materials in large quantities. 99% pure chemicals of methanol and KOH are of analytical grade reagents which were utilized. As base catalyst potassium hydroxide was used in granule shapes.

#### B. Design of Reactor and Impellers

A batch stirred tank reactor was designed and fabricated for the production of biodiesel and the byproduct glycerol. The following standard protocol was followed for the design.

#### C. Design of Reactor (5)

$$\frac{D_a}{D_t} = \frac{1}{3}; \frac{H}{D_t} = 1; \frac{J}{D_t} = \frac{1}{12}$$

$$\frac{E}{D_a} = \frac{1}{3}; \frac{W}{D_t} = \frac{1}{5}; \frac{L}{D_a} = \frac{1}{4}$$

Where,

J - Baffles thickness, E - Distance between Tank bottom & Stirrer,  $D_a$  - Diameter of Impeller (Agitator),  $D_t$  - Diameter of the Tank, H - Height of the Tank, L - Length of the Blade, W - Width of the Blade.

#### D. Procedure for calculating the total volume of reactant:

Amount of oil taken	= 238gm
Specific gravity of oil	= 0.898
Volume of oil	= $238/0.898$
	= 265ml
Volume of Methanol needed:	
Molecular weight of oil	≈ 900 kg/kmole
Molecular weight of Methanol	= 32 kg/kmole
Maximum moles ratio between oil and Methanol = 1:6	
Moles of Oil taken	= $238/900$
	= 0.264 moles
6 moles of methanol	= $(6 \times 0.264)$
	= 1.587 moles

Therefore, amount of methanol required

$$= \text{moles} \times \text{weight}$$

$$= 1.587 \times 32$$

$$= 50.77 \text{ gm.}$$

Volume of methanol ( $\text{CH}_3\text{OH}$ ) taken

$$V = (\text{specific gravity} \times \text{amount of } \text{CH}_3\text{OH})$$

Specific gravity of methanol = 0.791

Volume of methanol needed

$$V = 50.77/0.791$$

$$= 64.189 \text{ ml}$$

Total volume reactant taken

$$= (265 \text{ ml Oil} + 64.189 \text{ ml } \text{CH}_3\text{OH})$$

$$= 330 \text{ ml.}$$

From above reactor design ratio, the height of the reactor (H) and the H and diameter of the reactor ( $D_t$ ) is same. Because ratio between H and  $D_t$  is unity.

So volume of reactor =  $\pi \times D_t^2 \times H$

[From design ratio:  $(H/D_t) = 1$

$$= \frac{\pi}{4} \times D_t^3$$

$$= 330 \text{ ml}$$

$$D_t = \{(330 \times 4)/\pi\}^{(1/3)}$$

$$= 7.5 \text{ cm}$$

#### E. Rushton Impeller Design

The Rushton Impeller is one which enable to create good turbulence and suitable for liquid-liquid agitation. It consists of 4-8 blades. A four blade Rushton Impeller was used for the process of Biodiesel production.

#### F. Straight blade Impeller Design

Another type of impeller namely Straight blade Impeller was also used to compare the efficiency of the impeller. The design dimensions were been calculated using the following procedure.

Width of the impeller blade (W) =  $(1/2) \times D_a$

$$= (1/5) \times 2.5$$

$$= 0.5 \text{ cm}$$

Length of the impeller blade (L) =  $(1/2) \times (D_a - D_s)$

(Where  $D_s$  - Shaft diameter)

$$= (1/2) \times (2.5 - 0.3)$$

$$= 1.1 \text{ cm}$$

No. of blades = 4

#### G. Rubber Seeds:

The Rubber seeds are produced by nearby dealers. Some amounts of the seed were bought from the dealers during their maturation period. These Rubber seeds were completely cleaned and scrubbed to remove unwanted substances and were kept at 4°C up to the time of the seeds being de-shelled first and after that they were dried for 4 hours at 60°C. The dried seeds were squashed finely and after that they were brought to oven and kept overnight at 45°C. Furthermore, 100g of the seeds that were ground were used for an extraction process.



It was kept for 4 hours at 60°C and as a solvent, 250 ml of n-hexane was utilized in this process. After the extraction process, the oil solvent mixture was completely put through the evaporation process which was performed using vacuum Rotavapor (R-200) at a temperature of 60°C. The evaporation process was performed to recover the extracted oil as the solvent evaporates.

**H. Biodiesel Production and Process Optimization:**

The parameters that were used for optimization includes the temperature of the reaction, the catalyst used, the proportion of alcohol and oil, Impeller speed, Types of Impeller and Time of the reaction were the parameters used for the optimization. The temperature of the reactions firmly influences the reaction rate. In spite of that the reaction is held near to the boiling point of the methanol (60-70.8C) at atmospheric pressure for the required time. Pre esterification is done in order to remove the free fatty acids from the oil for these mild reaction conditions. The molar ratio of alcohol and oil is into important consideration. 3 moles of fatty acids and 1 mol of glycerol are obtained by the Trans esterification reaction of 3 mol of alcohol per mole triglyceride. of glycerol. If the reaction has to be shifted to the right, it is essential to separate one of the products from the reaction mixture or utilize the excess alcohol. For the reaction to progress completion a second option is needed. In industrial process, a molar ratio of about 6:1 is usually required to acquire methyl ester yields more than 98% (w/w). Taguchi methodology is the recent statistical tool applied to perform the process of optimization. Taguchi’s design of experiment using especially constructed tables known as “orthogonal arrays” was used. Standard analysis approach was selected. The Batch Stirred Tank Reactor BSTR is first topped up with an ideal amount of oil, and after that it is been positioned with stirrer. Once it attains the oil phase at the specific temperature, the reaction vessel is filled with methanol and the catalyst. In a report, the eggshells’ Calcium oxide (CaO) has been utilized as a heterogeneous catalyst for the creation of biodiesel from extremely viscous rubber seed oil [15].

The Trans esterification response was completed under the state of the required reaction of time 25-55 minutes, Reaction ratio 1:3 to 1:6, catalyst amount 0.75% (w/v) to 1.5%, Impeller speed 300 to 900 rpm temperature (35–55°C, amount of oil (2%), time for the reaction to complete (60–180 min), and temperature at which the reaction take place (35–55 °C). The mixture is separated from glycerol using a separating funnel in a day. As soon as the glycerol is removed, the methyl ester layer is been washed three times, with twice the volumes of hot distilled water that is used in the elimination of the catalyst and the glycerol deposits. Table- I shows the factors with the level used and the experiments were performed according to the inner orthogonal array derived using Taguchi’s analysis software in Table- II.

**Table- I: Control Factors**

Factors	Level-1	Level-2	Level-3	Level-4
Types of impellers	I1	I2	-	-
Temperature	55	60	65	70
Time	25	35	45	55
Reaction ratio	1:03	1:04	1:05	1:06
Catalyst amount	0.75%	1%	1.25%	1.50%
Impeller speed	300	500	700	900

**Table- II: Inner Orthogonal Array**

Trial No.	Impeller Type	Temperature	Time	Reactant ratio	Catalyst amount	Impeller speed
1	1	1	1	1	1	1
2	1	1	2	2	2	2
3	1	1	3	3	3	3
4	1	1	4	4	4	4
5	1	2	1	1	2	2
6	1	2	2	2	1	1
7	1	2	3	3	4	4
8	1	2	4	4	3	3
9	1	3	1	2	3	4
10	1	3	2	1	4	3
11	1	3	3	4	1	2
12	1	3	4	3	2	1
13	1	4	1	2	4	3
14	1	4	2	1	3	4
15	1	4	3	4	2	1
16	1	4	4	3	1	2
17	2	1	1	4	1	4
18	2	1	2	3	2	3
19	2	1	3	2	3	2
20	2	1	4	1	4	1
21	2	2	1	4	2	3
22	2	2	2	3	1	4
23	2	2	3	2	4	1
24	2	2	4	1	3	2
25	2	3	1	3	3	1
26	2	3	2	4	4	2
27	2	3	3	1	1	3
28	2	3	4	2	2	4
29	2	4	1	3	4	2
30	2	4	2	4	3	1
31	2	4	3	1	2	4
32	2	4	4	2	1	3



# Optimization of Biodiesel (Rubber Seed Oil) Process Parameters using Taguchi Method Based on Experimental Procedure in A Batch Stirred Tank Reactor


## III. RESULTS AND DISCUSSION

### A. Design of Batch Stirred Tank Reactor


A Batch Stirred Tank Reactor was designed and fabricated for the production of biodiesel Fig. 1(a) and Fig. 1(b). The reactor vessel was surrounded with a jacketed vessel used for heating the reactor and also maintaining the reaction temperature. The steam required for maintaining the temperature was supplied through a steam boiler attached to the reactor and also a cooling coil inserted into the reactor. The reactor was fitted with two baffles, a stirrer and a motor. The rpm of the impeller was monitored and controlled with a speed regulator attached to the motor. Top views of the BSTR reactor with different impeller were shown in the Fig. 2. Table- III shows the dimensions of the designed reactor. It was observed that the reactor is 7.5cm. Height, 7.5cm diameter and attached baffles will be suitable for the testing the optimization process of biodiesel production. Table- III reveals the design date of the reactor estimated using the standard design ratio.

**Table- III: Design Data of Batch Stirred Tank Reactor**

S. No.	Design of the batch stirred tank reactor vessel Design dimension of the reactor vessel	Dimensions
1	Diameter of Reactor ( $D_t$ )	7.5cm.
2	Height of the tank ( $H$ )	7.5cm.
3	Original height of reactor needs some clearance from calculated height. Because the calculated height of reactor is obtain from total volume of reactant taken.	12cm
4	Diameter of agitator ( $D_a$ )	2.5cm.
5	Baffle thickness ( $J$ )	0.625cm.
6	Distance between bottom of the tank and impeller ( $E$ )	2.5cm
<b>Rushton Impeller Design</b>		
7	Width of the impeller blade ( $W$ )	0.5cm.
8	Length of the impeller blade ( $L$ )	0.625cm.
9	No. of blades	04 blades
<b>Straight blade Impeller Design</b>		
10	Width of the impeller blade ( $W$ )	0.5cm
11	Length of the impeller blade ( $L$ )	1.1cm
12	No. of blades	04 blades

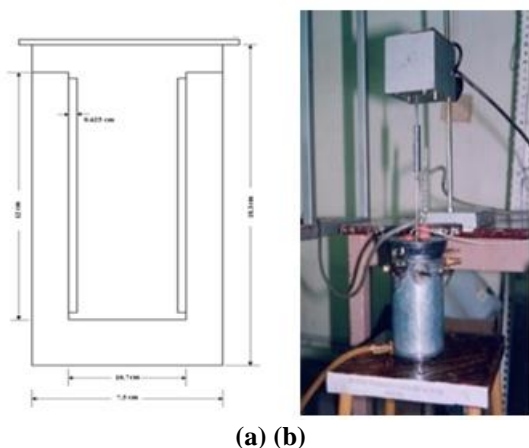

**Fig. 1. Batch Stirred Tank Reactor and their design for the production of biodiesel (a) – Dimensions, (b) – Fabrication view**

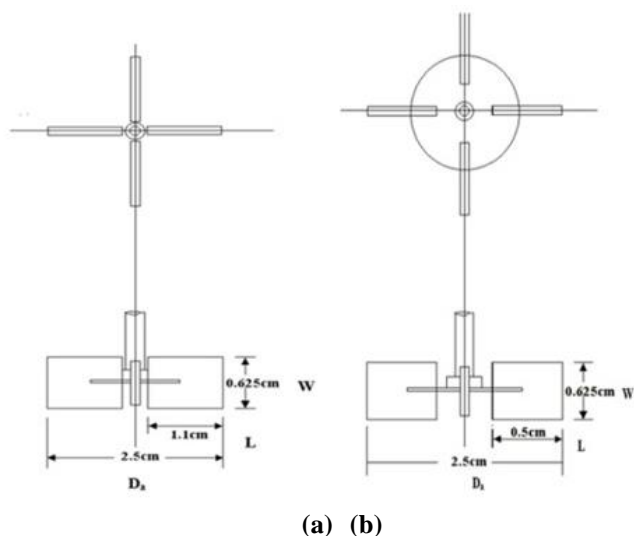

**Fig. 2. Top view of batch stirred tank reactor(BSTR) with (a) - Straight blade Rushton, (b) - Impeller setup and dimensions**

### B. Process Optimization and Analysis of Variance

In order to change every independent variable and to observe ideal values for the reaction targets, Taguchi methodology is been carried out (Table- IV). Analysis of Variance was observed with high  $f$  value for the process variables and reveals the performance of the method adopted along with the optimum value. It was found to have no distinction in the mean from the study of variance (ANOVA) in the statistical overview of the experimental facts. From the above experimental analysis, apparently, more prominent the estimation of sum of square of an independent factors, the more it impacts the production variable. On enumerating the proportion of discrete sum of square of a particular independent factor to the entire sum of squares of all the factors, the percent improvement of the separate variable on the performance specification is found out. Hence the  $P$  value is high for reactant ratio which is 63.64 followed by 11.69 of the catalyst amount. The  $F$ - test values are evaluated at 95% of confidence level to determine the mainfactors that affects the other factors. The result implies that the ‘ $F$ ’ test values calculated at 95 % confidence is satisfied for classification of the impeller. The variance analysis (ANOVA) is used to estimate the speed of the stirrer based on the yield and the effects caused by KOH and methanol. Based on the outcome from the ANOVA table, it revealed that the effect of reactant ratio, catalyst amount and impeller were obtained as 63.4%, 11.69% and 52.5% respectively. Similar results were obtained when Pungamia oil was used with a proportion of methanol, KOH, and stirrer speed and the outcomes were 70.10%, 20.35%, and 5.78%, respectively [16]. In Bangladesh, biodiesel is produced by employing Rubber seed oil (RSO) as a significant source. Biodiesel has been produced by employing a three phased methodology which consists of alkaline hydrolysis of oil, acidulation of the soap and esterification of Free Fatty Acids. The overall outcome of FFA from RSO appears to be almost 86% [17].

Table- IV: Analysis of Variance (Anova)

Column#/Factors	DOF (f)	Sum of Sqrs. (S)	Variance (V)	f-Ratio (F)	Pure sum (S <sup>1</sup> )	Percent P(%)
Types of impellers	1	395.078	395.078	1.995	197.097	0.793
Temperature	3	419.128	139.709	0.705	0	0
Time	3	431.258	143.752	0.726	0	0
Reactant ratio	3	1605.666	5468.555	27.621	15811.723	63.643
Catalyst amount	3	3499.519	1166.506	5.892	2905.576	11.695
Impeller speed	3	723.95	241.316	1.218	130.006	52.3
Other/Error	15	2969.719	197.981	-	-	23.35%
Total	31	24844.319	23.346	-	-	100.00%

C. Effect of process variables

Impeller I showed a prominent result with 56.0 as level of index and the second impeller with 49.7 Fig. 3(a). Hence the Rushton turbine impeller was found to be better than the straight blade impeller due to the flow pattern prevailed with optimum speed inside the reactor. The effect of temperature with the level of index Fig. 3(b) reveals that maximum effect of 61.9 was observed in the level 3 which was 65 temperatures. Fig. 3 (c). the time reaction with the measure of index shows that maximum effect was observed in the level 3 with 65.2 followed by level 2 with 52.9, level 1 with 49.2, level 4 with 51.0. Hence the optimum time required for the best Trans esterification was found to be 45 minutes. Fig. 3 (d). The effect of reaction ratio of the level of index shows that maximum effect was observed in the level 4 with 74.0 followed by level 3 with 73.6, level 2 with 48.2, level 1 with 19.3. Hence the optimum reactant ratio

required for the best Trans esterification was found to be 1:6 of level 4. Fig. 3 (e). the effect of catalyst amount with the level of index shows that maximum effect was observed in the level 2 with 68.0 followed by level 3 with 59.3, level 1 with 50.2, level 4 with 37.0. Hence the optimum amount of catalyst required for the best Trans esterification was found to be 22.46% (w/v) of level 2. Fig. 3 (f). the effect of impeller speed with the level of index shows that maximum effect was observed for level 4 with 59.4 followed by level 1 with 56.3, level 2 with 55.2 and level 3 with 45.0 and maximum was observed for level 4 with optimum speed of 500 rpm. There was a rise in the level of the rate of conversion of methanol/oil having the molar ratio that ranges from 2:1 to 4:1. Later the rate of conversion decreased where the ratio that ranges from 5:1 to 6:1 was noted. The finest molar ratio of methanol/oil was detected at 4:1 [18].

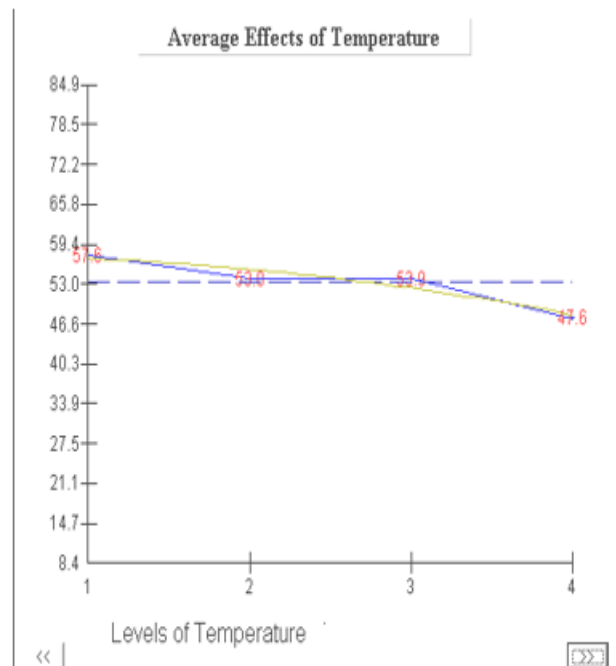
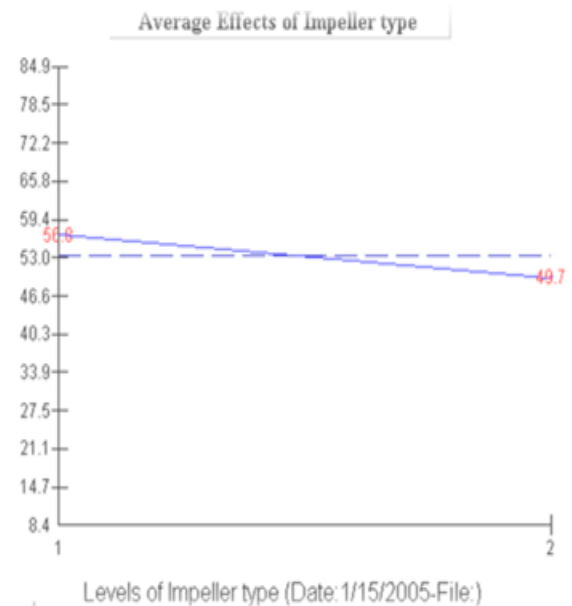


Fig. 3(a). Average effects of Impeller type Fig. 3(b). Average effects of Temperature

# Optimization of Biodiesel (Rubber Seed Oil) Process Parameters using Taguchi Method Based on Experimental Procedure in A Batch Stirred Tank Reactor

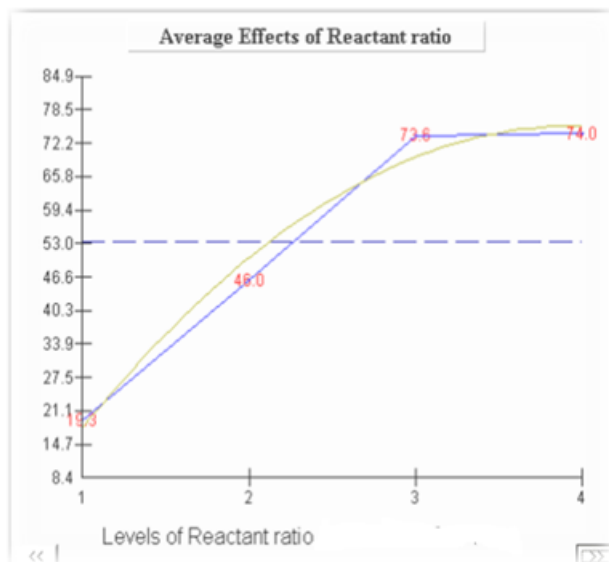
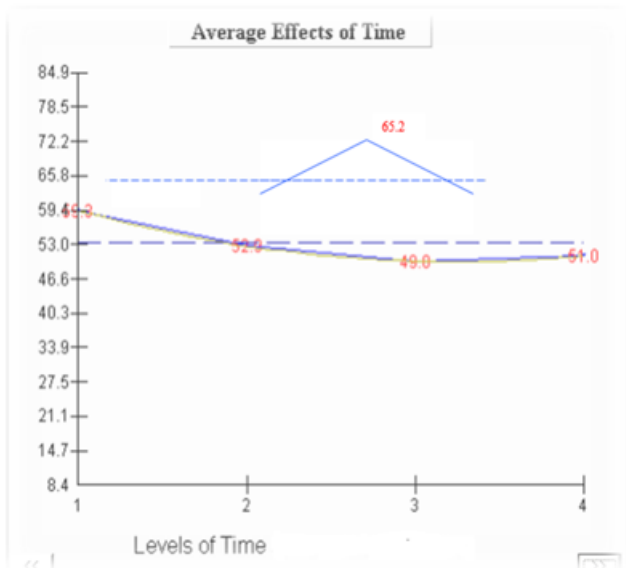


Fig. 3(c). Average effects of Time Fig. 3(d). Average effects of Reaction ratio

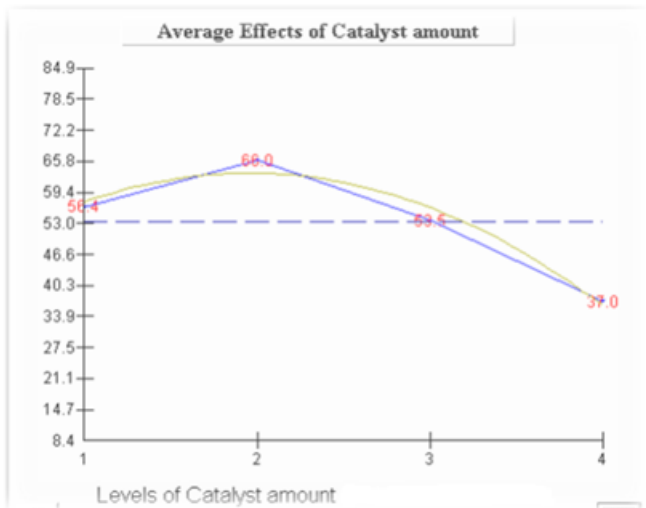


Fig. 3(e). Average effects of Catalyst Amount

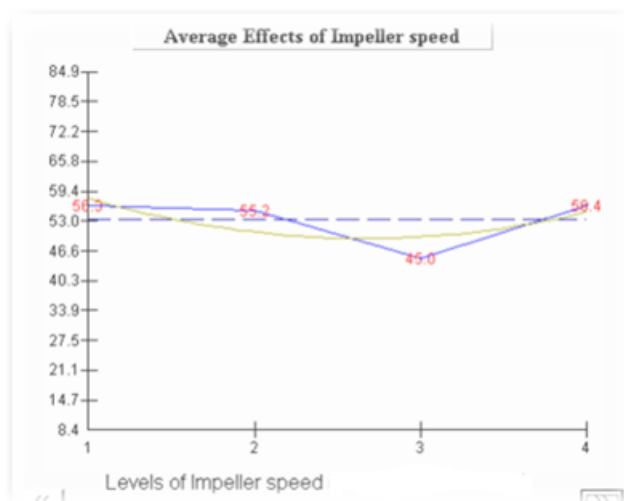


Fig. 3(f). Average effects of Impeller Speed with mixing ratios B20 without using any other additional equipment's.

Table- V: Optimum Condition and Performance

Factors	Level description	Level
Types of Impeller	I1	1
Temperature	65	3
Time	45	3
Reactant ratio	1:6	4
Catalyst amount	22.46%	2
Impeller Speed	500	1

## IV. CONCLUSION

This project work has brought a concern to us to verify that using transesterification process, biodiesel is obtained with the use of rubber seed oil in a batch stirred tank reactor. The optimization of few important parameters like Impeller type-Straight blade impeller, Temperature-65°C, Time - 45min, Reactant ratio - 1:6, Catalyst amount-22.46% (mol% of Oil), and Impeller Speed-500rpm produced a maximum output of biodiesel with the yield of 88 % . As an outcome of this project, the product can be used as fuel in diesel engines

## V. SCOPE OF FUTURE WORK

The designed and fabricated BSTR reactor used for biodiesel production could be scaled up to 50 liter large scale reactor and can be used for batch operation. The biodiesel can also be utilized in diesel engines to trial the performance.

## ACKNOWLEDGMENT

The authors thank the amenities provided from Bioenergy Research Lab, Bioprocess and Bioproduct Lab (BBL) and the management of Bannari Amman Institute of Technology, Sathyamangalam for their support to successfully complete and publish this paper.

## REFERENCE

1. Agarwal, A. K. 2007. Bio fuels (Alcohols and bio diesel) applications as fuels for internal combustion engines. *Int. J. Prog. Energy Combust. Sci.* 33:233–271.
2. Akarte, R. R. 2004. An Overview of Energy and Issues of Future. First National Conference on Energy and Fuel Issues of Future, Pune: PIET, pp. 150–160.
3. Tewari, D. N. 2003. Report of the Committee on Development of 'BIO-FUEL' Planning Commission. New Delhi: Government of India.
4. Karmee, S. K., and Anju Chadha. 2005. Preparation of bio diesel from crude oil of *Pongamia pinnata*. *Bio Resour. Technol.* 96:1425–1429.
5. Bijalwan, A., Sharma, C. M., and Kediya, V. K. 2006. Bio diesel revolution. *Sci. Rep. Q. Mag.* 14 –17. Clinton. 2006. We need to move to a bio fuel future. *Q. Mag. Bio Spectr.* 30 –32.
6. Rao, S. 2006. National Security Presidential Address, 93rd Indian Science Congress Annual Report, 12. Atadashi, I. M.; Aroua, M. K.; Aziz, A. A. High Quality Biodiesel and Its Diesel Engine Application: A Review. *Renew. Sustain. Energy Rev.* 2010, 14, 1999–2008.
7. Paramathma, M. 2004. Tree Improvement Strategies for augmenting growth and seed yield in tree borne oilseeds. *Renewable Energy Sci. Ser. XIII* 261–277.
8. Raheman, H., and Ghadge, S. V. 2007. Performance of compression ignition engine with Mahua (*Madhuca indica*) bio diesel. *Int. J. Fuel* 86:2568–2573.
9. Ramasamy, C. 2007. *Jatropha* improvement management and production of bio diesel. *Hand Book for Bio diesel*. Tamil Nadu Agricultural University, pp. 40–49.
10. Srivastava, P.K., and Madhumita Verma. 2007. Methyl ester of Karanja oil as alternative renewable source energy. *Int. J. Fuel* 87:1673–1677.
11. Atadashi, I. M.; Aroua, M. K.; Aziz, A. A. High Quality Biodiesel and Its Diesel Engine Application: A Review. *Renew. Sustain. Energy Rev.* 2010, 14, 1999–2008.
12. Juan, J. C.; Kartika, D. A.; Wu, T. Y.; Hin, T.-Y. Y. Biodiesel Production from *Jatropha* Oil by Catalytic and Non-Catalytic Approaches: An Overview. *Bioresour. Technol.* 2011, 102, 452–460.
13. Kumar, S.; Jain, S.; Kumar, H. Process Parameter Assessment of Biodiesel Production from a *Jatropha*-Algae Oil Blend by Response Surface Methodology and Artificial Neural Network. *Energy Sources, Part a* 2017, 39, 2119–2125.
14. Gemma Vicente, Mercedes Martinez, and Jose Aracil. 2006. Optimization of integrated bio diesel production Part I. A study of the bio diesel purity and yield. *Int. J. Bio Resour. technol.* 98:1724–1733.
15. A.V.S.L. Sai Bharadwaj, Madhu Singh, S. Niju, K.M. Meera Sheriffa Begum and N. Anantharaman\* Biodiesel production from rubber seed oil using calcium oxide derived from eggshell as catalyst – optimization and modeling studies *Green Process Synth* 2019; 8: 430–442
16. Saravanakumar, A. Avinash & R. Saravanakumar (2016) Optimization of biodiesel production from Pungamia oil by Taguchi's technique, *Energy Sources, Part A: Recovery, Utilization, and Environmental Effects*, 38:17, 2524-2529
17. MahbubMorshed, KanizFerdous, MaksudurR.Khan, M.S.I.Mazumder, M.A.Islam, Md.T.Uddin Rubber seed oil as a potential source for biodiesel production in Bangladesh *Fuel*
18. JoliusGimbuna, b , Shahid Alia, Chitra Charan Suri CharanKanwala, Liyana Amer Shaha, Nurul Hidayah Muhamad Ghazalia, Chin KuiChenga, Said Nurdina, Biodiesel Production From Rubber Seed Oil Using Activated Cement Clinker As Catalyst *Procedia Engineering* 53 ( 2013 ) 13 – 19
19. Sharma, Y. C.; Singh, B. A Hybrid Feedstock for a Very Efficient Preparation of Biodiesel. *Fuel Process. Technol.* 2010, 91, 1267–1273.
20. Juan, J. C.; Kartika, D. A.; Wu, T. Y.; Hin, T.-Y. Y. Biodiesel Production from *Jatropha* Oil by Catalytic and Non-Catalytic Approaches: An Overview. *Bioresour. Technol.* 2011, 102, 452–460.
21. Gandhi, B. S.; Chelladurai, S. S.; Kumaran, D. S. Process Optimization for Biodiesel Synthesis from *Jatropha Curcas* Oil. *Distr. Generat. Alternative Energy J.* 2011, 26, 6–16.
22. Unit Operations of Chemical Engg Mmecaabe and Smith Antolin, G., Tinaut, F. V., Briceno, Y., Castano, V., Perez, C., and Ramirez, A. I. 2002. Optimization of bio diesel production by sunflower oil transesterification. *Int. J. Bio Resour. Technol.* 83:111–114.
23. Gemma Vicente, Mercedes Martinez, and Jose Aracil. 2007. Optimization of integrated bio diesel production part II. A study of the material balance. *Int. J. Bio Resour. Technol.* 98:1754–1761.
24. S.Senthil Kumar, K.Purushothaman High FFA Rubber Seed Oil as an Alternative Fuel for Diesel Engine – An Overview *International Journal of Engineering and Science* Vol. 1, Issue 10, 2012, PP 16-24

## AUTHORS PROFILE



**Dr. R. Ravikumar** is a Professor of the department of Biotechnology, Bannari Amman Institute of Technology. He is in charge of Bioenergy Research lab and also Bioprocess and Bioproduct Lab BBL of the department.



**Sowmiya. T** currently pursuing her final year Btech degree in the department of biotechnology, Bannari Amman Institute of Technology.



**Srilakkshmi. K. M** currently pursuing her final year Btech degree in the department of biotechnology, Bannari Amman Institute of Technology.



**Pragatheesh. L** currently pursuing his final year Btech degree in the department of biotechnology, Bannari Amman Institute of Technology.



**Sukeerthi. A** currently pursuing her final year Btech degree in the department of biotechnology, Bannari Amman Institute of Technology.