


```
pf::rbase< nparts,  
dimx >
```

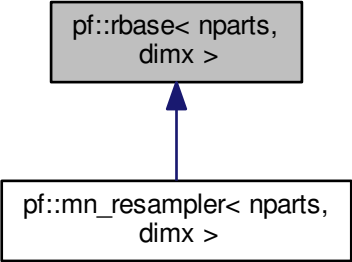

```
graph BT; A[\"pf::mn_resampler< nparts, dimx >\"] --> B[\"pf::rbase< nparts, dimx >\"]
```

A diagram showing a vertical relationship between two C++-style class templates. At the bottom is a white box containing the text `pf::mn_resampler< nparts, dimx >`. A blue arrow points upwards from the top center of this box to the bottom center of a gray box above it. The gray box contains the text `pf::rbase< nparts, dimx >`. This indicates that `pf::mn_resampler` inherits from or is a specialization of `pf::rbase`.

```
pf::mn_resampler< nparts,  
dimx >
```