


```
pf::rbase< nparts,  
dimx >
```

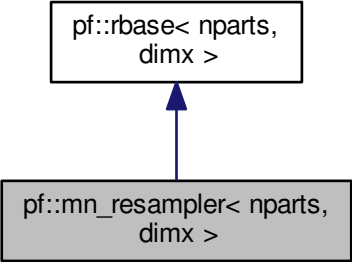

```
graph BT; A[\"pf::mn_resampler< nparts, dimx >\"] --> B[\"pf::rbase< nparts, dimx >\"]
```

A diagram illustrating a relationship between two C++ template classes. At the bottom is a gray rectangular box containing the text `pf::mn_resampler< nparts, dimx >`. A blue arrow points vertically upwards from the top center of this box to the bottom center of a white rectangular box above it. The white box contains the text `pf::rbase< nparts, dimx >`. This visualizes that `pf::mn_resampler` inherits from or is derived from `pf::rbase`.

```
pf::mn_resampler< nparts,  
dimx >
```