

# LIFE-CYCLE RISK ASSESSMENT OF GRAPHENE





# FUNCTIONAL FABRICS James Ede, Ana Diges & Jo Anne Shatkin

jede@vireoadvisors.com

This project has received funding from the European Union's Horizon 2020 research and innovation program under grant agreement No 953152

Raw Material

Product Manufacture

Product Application

Product Use

Re-use/ Recycling

Disposal













- 1. Identify and Characterize Potential Hazards
- 2. Assess Exposure Potential and Risk
- 3. Prioritize Data Gaps

4. Address Data Gaps (E.g., Toxicity Studies)

Output: EHS Strategy

### **PROJECT SUMMARY**

- Performed a nano life-cycle risk assessment (NANO LCRA) of a grapheneenabled textile for heat and fire-resistant PPE.
- Developed the graphene toxicity database, evaluating state of knowledge.
- Exposure scenarios associated with inhalation of graphene powder rank highest.
- Priority research gaps: long-term, low dose graphene exposures; potential release and hazard characterization of graphene-acrylic nanocomposites.
- Development of Safe(r) and Sustainable-by-Design (SSbD) strategies.

# **CASE STUDY** Moisture

#### **APPROACH**

#### 1. Case Study Development

#### **Assumptions for GrapheneXT Industrial Partner Case Study**

Textile nanocomposite targets thermal dissipation, fire resistance, and antistatic properties

No PPE used across product life

Use of graphene nanoplatelets produced by liquid exfoliation

Production of graphene-acrylic paste according to XT method (5-10%wt GBM)

Applied to textile via XT method (screen printing) to innermost thermal liner, out-facing

3. Scenario Ranking

Magnitude

Likelihood

Frequency

Directness of exposure

Scenarios are ranked by applying four exposure

criteria (relative scores: 1-3). Highest cumulative

scores become the top-ranked scenarios.

Garment follows NFPA and CSN design & care standards

#### 2. Exposure Scenario Development **Across Life-cycle Stages**

For each life-cycle stage, possible scenarios that could lead to occupational, public or environmental exposure are identified.

- 1. Raw Material
- 2. Product Manufacturing
- 3. Product Application
- 4. Product Use
- 5. Re-use/Recycling
- 6. Disposal

## 4. Exposure and Hazard Literature Review

Literature about hazards (inhalation, dermal, ingestion, eye, ecological) and potential exposures to graphene (and other GBMs, where data is limited) in the workplace, to the public, or in the environment is collected and analyzed.


#### 5. Risk Characterization and Data Gap Analysis

The potential risks associated with the top-ranking exposure scenarios at each life-cycle stage are characterized on the basis of available information on exposure and hazard. This multi-angle approach exposes the strengths and shortcomings of current knowledge. The analysis contributes key findings toward the development of Safe(r) and Sustainable-by-Design (SSbD) strategies by identifying the key potential human and environmental hazards and exposures of the products across the product life-cycle.


#### **RESULTS**

#### The Graphene Toxicity Database

A literature review, quality evaluation, and database development informs potential hazards associated with graphene-based materials (GBMs) across the product lifecycle. Studies evaluating human health (in vivo, in vitro) and ecotoxicity were collected [8] subjected to a quality evaluation following the GUIDEnano approach [9] with the following results:

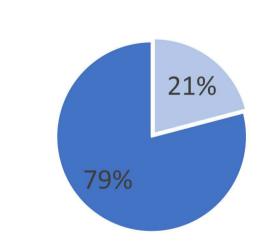

Did Not Pass Quality Evaluation Passed Quality Evaluation

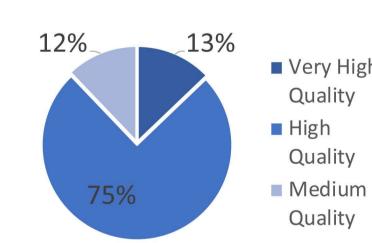

Life Cycle Stage	LC Stage Code	LC Stage #	Scenario#	Scenario	Receptor	Exposure Route	Hazard Potential	Magnitude <sup>1</sup>	Likelihood	Frequency	Score	Rank
				Transfer graphene from synthesis facility to production facility			3	3	2	3	11	1
Raw Material	RM	1	1	(e.g.handling & bagging)	occupational	inhalation	3	3				
				Transfer graphene from synthesis facility to production facility (e.g.			3	3	2	3	11	1
Raw Material	RM	1	2	handling & bagging)	occupational	ingestion/derm	,5:	3	2	3	- 11	111
Product Manufacturing	PM	2	1	Mixing graphene and acrylic to produce paste - graphene dust release	occupational	inhalation	3	3	2	3	11	1
Raw Material	RM	1	3	Incidental release from synthesis equipment	occupational	inhalation	3	2	2	3	10	2
Raw Material	RM	1	4	Incidental release from synthesis equipment	occupational	ingestion/derm	3	2	2	3	10	2
Raw Material	RM	1	5	Incidental release from synthesis equipment	environmental	direct contact	3	2	1	3	9	3
Raw Material	RM	1	6	Synthesis equipment cleanout	occupational	inhalation	3	2	2	2	9	3
Raw Material	RM	1	7	Synthesis equipment cleanout	occupational	ingestion/derm	3	2	2	2	9	3
Raw Material	RM	1	8	Synthesis equipment cleanout	environmental	direct contact	3	2	2	2	9	3
Raw Material	RM	1	9	Accidental release/spill during production	occupational	inhalation	3	3	2	1	9	3
Raw Material	RM	1	10	Accidental release/spill during production	occupational	ingestion/derm	3	3	2	1	9	3
Raw Material	RM	1	11	Accidental release/spill during production	environmental	direct contact	3	3	2	1	9	3
				Mixing graphene and acrylic to produce paste; homogenization in roller-			2	2	2	3	9	3
Product Manufacturing	<del></del>	2	2	dermal contact with mix/paste	occupational	ingestion/derm		_				
Product Manufacturing		2	6	Accidental spill/release of graphene powder during handling	occupational	inhalation	3	3	2	1	9	3
Product Application	PA	3	1	Paste deposition on textile with screen print equipment	occupational	ingestion/derm	2	2	2	3	9	3
				Contact with graphene on textile during firefighting garment			2	2	3	2	9	3
Product Use	PU	4	1 -	assembly/detachment	occupational	dermal	2	4	2			
Re-use/Recycling	RR	5	7	New use causes graphene release from textile	public	inhalation	2	1	3	3	9	3
Re-use/Recycling	RR	5	8	New use causes graphene release from textile	public	ingestion/derm	2	1	3	3	9	3
Re-use/Recycling	RR	5	9	New use causes graphene release from textile		direct contact	2	1	3	3	9	3
Product Manufacturing	PM	2	3	Equipment cleanout	occupational	inhalation	2	2	2	2	8	4
0	PM	2	4	Equipment cleanout	occupational	ingestion/derm	2	2	2	2	8	4
Product Manufacturing	PM	2	5	Equipment cleanout	environmental	direct contact	2	2	2	2	8	4
Product Application	PA	3	3	Screen print equipment cleanout	occupational	ingestion/derm	2	2	2	2	- 8	4
				Screen print equipment cleanout		direct contact	2					4

**Exposure Scenario Development and** Ranking

## CONCLUSIONS AND RECOMMENDATIONS

- Occupational exposure scenarios associated with inhalation during raw material and product manufacturing ranked highest.
- Available information suggests graphene has a relatively low pulmonary hazard. Data gaps exist in our understanding of potential hazards from long-term, low dose graphene exposures typical of the workplace. These data gaps are important priorities to fill for SSbD.
- Once incorporated into coating, there is a much lower potential for graphene exposure to workers, the public, and the environment. However, very limited data was located characterizing the hazard and potential release from graphene-acrylic composites.
- Studies to understand (1) potential inhalation and dermal hazards of graphene-acrylic composites; and (2) release characteristics from graphene-acrylic composites would allow iteration of these scenarios and reduce current uncertainty.